


RADIFOCUS® *Guidewire M*
STANDARD

Guide Wire

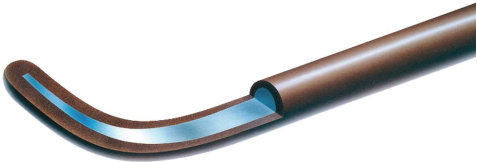

Indicated for use for standard angiography in coronary and peripheral territories, catheterization, embolization, peripheral angioplasty and stenting (with or without an exchange wire), and subintimal angioplasty in small, standard or large proximal or distal vessels.

Product Characteristics

Radifocus® Guidewire M Standard type is a Nitinol hydrophilic guidewire covered with polyurethane containing tungsten and a hydrophilic polymer coating (M Coat™) .

- Radiopaque polyurethane jacket
- One-piece construction
- Rounded, tapered tip

General specifications

Distal Curve	Angled, Double Angulation (Bolia), J Angled (1.5 mm), J Angled (3 mm), Straight / Straight mm
Hydrophilic Coating	"M" Polymer
Radiopaque Jacket	Polyurethane Layer Containing Tungsten

Item specifications

Guidewire Diameter - Outer Diameter	Length	Flexible Length	Core Material	Code
0.018 in 0.46 mm	50 cm	30 mm	Nitinol	RF-GA18053M
0.018 in 0.46 mm	80 cm	30 mm	Nitinol	RF*GS18183M
0.018 in 0.46 mm	150 cm	30 mm	Nitinol	RF*GS18153M
0.018 in 0.46 mm	150 cm	30 mm	Nitinol	RF-GA18153M
0.018 in 0.46 mm	150 cm	30 mm	Nitinol	RF-GS18153M
0.018 in 0.46 mm	150 cm	30 mm	Nitinol	RF*GA18153M
0.018 in 0.46 mm	180 cm	30 mm	Nitinol	RF*GA18183M
0.018 in 0.46 mm	180 cm	30 mm	Nitinol	RF-GA18183M
0.018 in 0.46 mm	180 cm	30 mm	Nitinol	RF-GS18183M
0.018 in 0.46 mm	220 cm	30 mm	Nitinol	RF-GA18223M
0.018 in 0.46 mm	260 cm	30 mm	Nitinol	RF-GS18263M
0.018 in 0.46 mm	260 cm	30 mm	Nitinol	RF*GA18263M
0.018 in 0.46 mm	260 cm	30 mm	Nitinol	RF-GA18263M
0.018 in 0.46 mm	260 cm	30 mm	Nitinol	RF*GS18263M
0.025 in 0.64 mm	50 cm	30 mm	Nitinol	RF-GA25053M
0.025 in 0.64 mm	120 cm	30 mm	Nitinol	RF-GA25123M
0.025 in 0.64 mm	120 cm	30 mm	Nitinol	RF-GS25123M
0.025 in 0.64 mm	150 cm	30 mm	Nitinol	RF-GA25153M
0.025 in 0.64 mm	150 cm	30 mm	Nitinol	RF-GS25153M
0.025 in 0.64 mm	150 cm	30 mm	Nitinol	RF*GS25153M
0.025 in 0.64 mm	150 cm	30 mm	Nitinol	RF*GA25153M
0.025 in 0.64 mm	180 cm	30 mm	Nitinol	RF*GA25183M
0.025 in 0.64 mm	180 cm	30 mm	Nitinol	RF-GA25183M
0.025 in 0.64 mm	180 cm	30 mm	Nitinol	RF-GS25183M
0.025 in 0.64 mm	260 cm	30 mm	Nitinol	RF-GS25263M
0.025 in 0.64 mm	260 cm	30 mm	Nitinol	RF*GA25263M
0.025 in 0.64 mm	260 cm	30 mm	Nitinol	RF-GA25263M
0.025 in 0.64 mm	260 cm	30 mm	Nitinol	RF*GS25263M
0.032 in 0.81 mm	120 cm	30 mm	Nitinol	RF-GA32123M
0.032 in 0.81 mm	120 cm	30 mm	Nitinol	RF-GS32123M
0.032 in 0.81 mm	150 cm	30 mm	Nitinol	RF-GS32153M
0.032 in 0.81 mm	150 cm	30 mm	Nitinol	RF*GA32153M
0.032 in 0.81 mm	150 cm	30 mm	Nitinol	RF*GS32153M
0.032 in 0.81 mm	150 cm	30 mm	Nitinol	RF-GA32153M
0.032 in 0.81 mm	180 cm	30 mm	Nitinol	RF-GA32183M
0.032 in 0.81 mm	180 cm	30 mm	Nitinol	RF-GS32183M

Please quote above item reference codes when placing an order

Item specifications

Guidewire Diameter - Outer Diameter	Length	Flexible Length	Core Material	Code
0.032 in 0.81 mm	180 cm	30 mm	Nitinol	RF*GA32183M
0.032 in 0.81 mm	260 cm	30 mm	Nitinol	RF*GA32263M
0.032 in 0.81 mm	260 cm	30 mm	Nitinol	RF-GS32263M
0.032 in 0.81 mm	260 cm	30 mm	Nitinol	RF-GA32263M
0.032 in 0.81 mm	260 cm	30 mm	Nitinol	RF*GS32263M
0.035 in 0.89 mm	50 cm	30 mm	Nitinol	RF-GA35053M
0.035 in 0.89 mm	80 cm	30 mm	Nitinol	RF*GA35083M
0.035 in 0.89 mm	80 cm	30 mm	Nitinol	RF-GA35083M
0.035 in 0.89 mm	120 cm	30 mm	Nitinol	RF-GS35123M
0.035 in 0.89 mm	120 cm	30 mm	Nitinol	RF*GA35123M
0.035 in 0.89 mm	120 cm	30 mm	Nitinol	RF-GA35123M
0.035 in 0.89 mm	150 cm	10 mm	Nitinol	RF-GA35151M
0.035 in 0.89 mm	150 cm	10 mm	Nitinol	RF-GS35151M
0.035 in 0.89 mm	150 cm	30 mm	Nitinol	RF*GA35153M
0.035 in 0.89 mm	150 cm	30 mm	Nitinol	RF*GB35153M
0.035 in 0.89 mm	150 cm	30 mm	Nitinol	RF*GS35153M
0.035 in 0.89 mm	150 cm	30 mm	Nitinol	RF*GR35153M
0.035 in 0.89 mm	150 cm	30 mm	Stiff Tapered Nitinol	RF*PS35153M
0.035 in 0.89 mm	150 cm	50 mm	Nitinol	RF-GA35155M
0.035 in 0.89 mm	150 cm	50 mm	Nitinol	RF*GA35155M
0.035 in 0.89 mm	150 cm	50 mm	Nitinol	RF-GS35155M
0.035 in 0.89 mm	150 cm	80 mm	Nitinol	RF-GA35158M
0.035 in 0.89 mm	150 cm	80 mm	Nitinol	RF*GA35158M
0.035 in 0.89 mm	150 cm	80 mm	Nitinol	RF-GS35158M
0.035 in 0.89 mm	150 cm	80 mm	Nitinol	RF*GS35158M
0.035 in 0.89 mm	180 cm	10 mm	Nitinol	RF-GA35181M
0.035 in 0.89 mm	180 cm	10 mm	Nitinol	RF-GS35181M
0.035 in 0.89 mm	180 cm	30 mm	Nitinol	RF-GS35183M
0.035 in 0.89 mm	180 cm	30 mm	Nitinol	RF*GR35183M
0.035 in 0.89 mm	180 cm	30 mm	Nitinol	RF*GS35183M
0.035 in 0.89 mm	180 cm	30 mm	Nitinol	RF*GA35183M
0.035 in 0.89 mm	180 cm	30 mm	Stiff Tapered Nitinol	RF*PS35183M
0.035 in 0.89 mm	180 cm	50 mm	Nitinol	RF*GE35185M
0.035 in 0.89 mm	180 cm	80 mm	Nitinol	RF*GA35188M
0.035 in 0.89 mm	180 cm	80 mm	Nitinol	RF*GE35188M
0.035 in 0.89 mm	220 cm	30 mm	Nitinol	RF-GA35223M


Please quote above item reference codes when placing an order

Item specifications

Guidewire Diameter - Outer Diameter	Length	Flexible Length	Core Material	Code
0.035 in 0.89 mm	220 cm	30 mm	Nitinol	RF-GS35223M
0.035 in 0.89 mm	220 cm	30 mm	Nitinol	RF*GA35223M
0.035 in 0.89 mm	260 cm	10 mm	Nitinol	RF-GA35261M
0.035 in 0.89 mm	260 cm	10 mm	Nitinol	RF-GS35261M
0.035 in 0.89 mm	260 cm	30 mm	Nitinol	RF*GS35263M
0.035 in 0.89 mm	260 cm	30 mm	Nitinol	RF-GS35263M
0.035 in 0.89 mm	260 cm	30 mm	Nitinol	RF*GR35263M
0.035 in 0.89 mm	260 cm	30 mm	Nitinol	RF*GA35263M
0.035 in 0.89 mm	260 cm	30 mm	Stiff Tapered Nitinol	RF*PS35263M
0.035 in 0.89 mm	300 cm	30 mm	Nitinol	RF*GA35303M
0.035 in 0.89 mm	300 cm	30 mm	Nitinol	RF*GS35303M
0.035 in 0.89 mm	300 cm	30 mm	Nitinol	RF-GA35303M
0.035 in 0.89 mm	400 cm	30 mm	Nitinol	RF*GS35403M
0.035 in 0.89 mm	400 cm	30 mm	Nitinol	RF*GA35403M
0.035 in 0.89 mm	450 cm	30 mm	Nitinol	RF*GA35453M
0.035 in 0.89 mm	450 cm	30 mm	Nitinol	RF*GS35453M
0.038 in 0.97 mm	150 cm	10 mm	Nitinol	RF-GS38151M
0.038 in 0.97 mm	150 cm	10 mm	Nitinol	RF-GA38151M
0.038 in 0.97 mm	150 cm	30 mm	Nitinol	RF*GS38153M
0.038 in 0.97 mm	150 cm	30 mm	Nitinol	RF*GA38153M
0.038 in 0.97 mm	150 cm	30 mm	Nitinol	RF-GS38153M
0.038 in 0.97 mm	150 cm	30 mm	Stiff Tapered Nitinol	RF*PS38153M
0.038 in 0.97 mm	180 cm	30 mm	Nitinol	RF*GA38183M
0.038 in 0.97 mm	180 cm	30 mm	Nitinol	RF-GS38183M
0.038 in 0.97 mm	180 cm	30 mm	Nitinol	RF*GS38183M
0.038 in 0.97 mm	180 cm	30 mm	Nitinol	RF-GA38183M
0.038 in 0.97 mm	220 cm	30 mm	Nitinol	RF-GA38223M
0.038 in 0.97 mm	260 cm	30 mm	Nitinol	RF*GS38263M
0.038 in 0.97 mm	260 cm	30 mm	Nitinol	RF*GA38263M
0.038 in 0.97 mm	260 cm	30 mm	Nitinol	RF-GA38263M
0.038 in 0.97 mm	260 cm	30 mm	Nitinol	RF-GS38263M

Please quote above item reference codes when placing an order

RADIFOCUS® *Guidewire M* STIFF

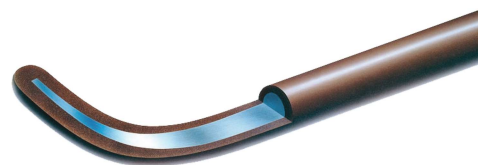

Guide Wire

Indicated for use for standard angiography in coronary and peripheral territories, catheterization, embolization, peripheral angioplasty and stenting (with or without an exchange wire) in tight, stenotic, tortuous and narrow vessels.

Product Characteristics

Radifocus® Guidewire M Stiff type is a stiff Nitinol hydrophilic guidewire covered with polyurethane containing tungsten and an hydrophilic polymer coating (M Coat™) for good torque control and shape memory as well as high stiffness and resistance.

- Radiopaque polyurethane jacket
- One-piece construction
- Rounded tapered tip

General specifications

Core Material	Stiff Tapered Nitinol
Hydrophilic Coating	"M" Polymer
Radiopaque Jacket	Polyurethane Layer Containing Tungsten

Item specifications

Guidewire Diameter - Outer Diameter	Length	Flexible Length	Distal Curve	Code
0.018 in 0.46 mm	180 cm	30 mm	Angled	RF*PA18183M
0.02 in 0.51 mm	150 cm	30 mm	Angled	RF-PA18153M
0.02 in 0.51 mm	260 cm	30 mm	Angled	RF-PA18263M
0.020 in 0.51 mm	260 cm	30 mm	Angled	RF*PA18263M
0.025 in 0.64 mm	150 cm	30 mm	Angled	RF-PA25153M
0.025 in 0.64 mm	150 cm	30 mm	Angled	RF*PA25153M
0.025 in 0.64 mm	150 cm	30 mm	Straight	RF-PS25153M
0.025 in 0.64 mm	180 cm	30 mm	Angled	RF-PA25183M
0.025 in 0.64 mm	260 cm	30 mm	Angled	RF*PA25263M
0.025 in 0.64 mm	260 cm	30 mm	Angled	RF-PA25263M
0.035 in 0.89 mm	80 cm	30 mm	Angled	RF*PA35083M
0.035 in 0.89 mm	80 cm	30 mm	Angled	RF-PA35083M
0.035 in 0.89 mm	80 cm	30 mm	Straight	RF-PS35083M
0.035 in 0.89 mm	150 cm	10 mm	Angled	RF-PA35151M
0.035 in 0.89 mm	150 cm	30 mm	Angled	RF*PA35153M
0.035 in 0.89 mm	180 cm	30 mm	Angled	RF*PA35183M
0.035 in 0.89 mm	180 cm	30 mm	J Angled (1.5 mm)	RF*HR35183M
0.035 in 0.89 mm	180 cm	30 mm	J Angled (2.0 mm)	RF*HN35183M
0.035 in 0.89 mm	180 cm	30 mm	Straight	RF-PS35183M
0.035 in 0.89 mm	180 cm	80 mm	Angled	RF*PA35188M
0.035 in 0.89 mm	260 cm	30 mm	Angled	RF*PA35263M
0.035 in 0.89 mm	260 cm	30 mm	Angled	RF-PA35263M
0.035 in 0.89 mm	260 cm	30 mm	Straight	RF-PS35263M
0.035 in 0.89 mm	300 cm	30 mm	Angled	RF*PA35303M
0.035 in 0.89 mm	300 cm	30 mm	Angled	RF-PA35303M
0.035 in 0.89 mm	300 cm	30 mm	J Angled (1.5 mm)	RF*HR35303M
0.038 in 0.97 mm	80 cm	30 mm	Straight	RF-PS38083M
0.038 in 0.97 mm	150 cm	30 mm	Angled	RF*PA38153M
0.038 in 0.97 mm	150 cm	30 mm	Angled	RF-PA38153M
0.038 in 0.97 mm	150 cm	30 mm	Straight	RF-PS38153M
0.038 in 0.97 mm	180 cm	30 mm	Angled	RF*PA38183M
0.038 in 0.97 mm	180 cm	30 mm	Angled	RF-PA38183M
0.038 in 0.97 mm	180 cm	30 mm	Straight	RF-PS38183M
0.038 in 0.97 mm	260 cm	30 mm	Angled	RF-PA38263M

Please quote above item reference codes when placing an order