


MICRO MARTIN Smooth Tool-less
MRUST 047 740 L19 AA016 CSN NH1

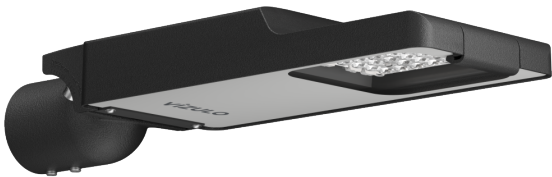

CE   RoHS

Color

RAL 9006

Electrical

Input power	47 W
Input voltage	220 - 240 V
Frequency	50 - 60 Hz
Power factor	0.92
Inrush current	43 A / 270 µs

Optical

Optic name	L19
Optic type	TYPE-III
Luminous flux	5320 lm ±7%
Luminous efficacy	113 lm/W
Performance temperature Tq	+25 °C
Constant light output	No
Color rendering index	>70
Color temperature	4000 K
Color tolerance	5 SDCM
ULOR	0
LED quantity	16

Lifetime

Lumen depreciation	L98 after 100 000 h
Warranty	5 years
Ambient temperature range	-40 ... +50 °C

Protection

Protection class	Class I
Surge protection L-N	12 kV
Surge protection L/N-PE	12 kV
LED module thermal protection w/ NTC	No
Max products per MCB B16	10
Ingress protection	IP66
Impact resistance	IK08

Housing

Body material	Die-cast aluminium
Cover material	Flat tempered glass
Optic material	PMMA
Color	RAL 9006 (white aluminium)
Dimensions	517 x 170 x 96 mm
Max wind load area SCd	0.04 m ²
Mounting	Post top / side-entry, 60 mm
LED module replaceability	Replaceable by a professional
Driver replaceability	Replaceable by a professional
Accessibility of electronic components	Tool-less


Controls

Dimming	No dimming
----------------	------------

Approvals

CE	Yes
ENEC	Yes
ENEC+	Yes
RoHS	Yes

Light distribution

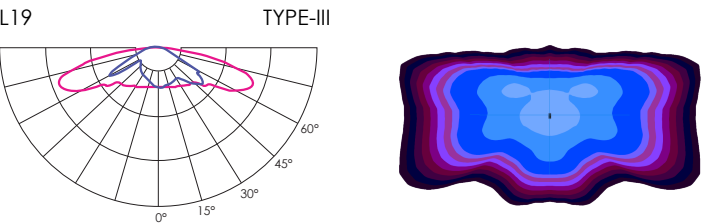

Dimensions

A x B x C (mm): 517 x 170 x 96

