


# SUPRA-FIX-INTEGRALE Puncture-, Exchange- and Dilation Exchange Set


100% silicone, with integrated balloon

## SET COMPONENTS

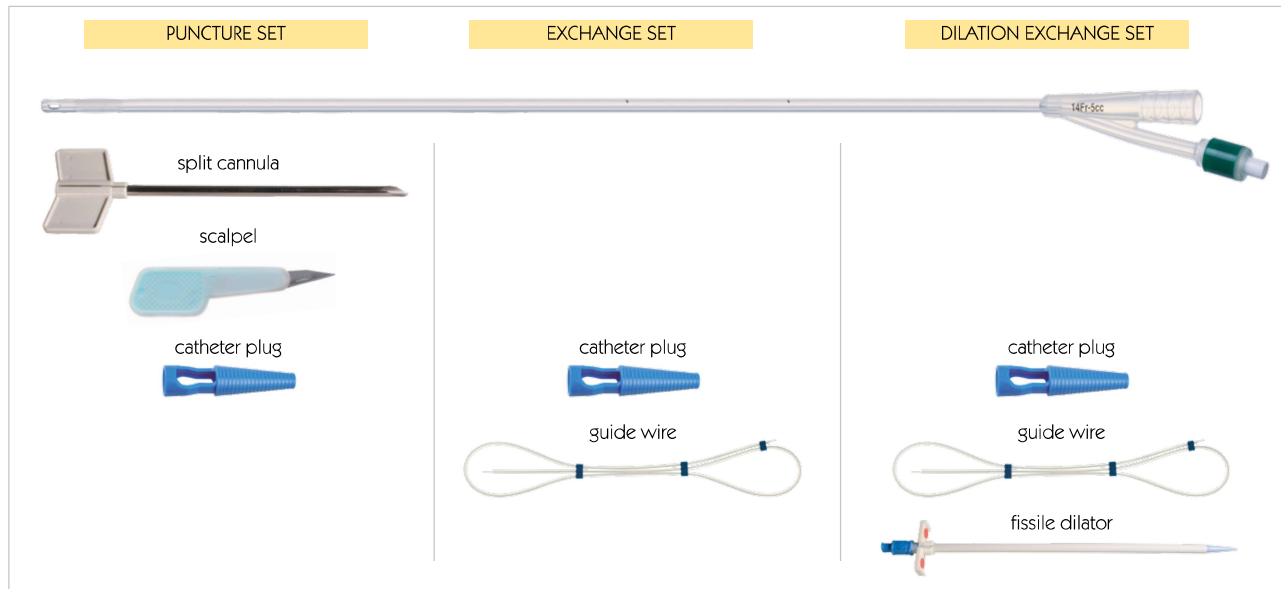

### Balloon Catheter

- ◆ Silicone for optimal tissue compatibility
- ◆ Markings for exact positioning



### Split Cannula

- ◆ Medical stainless steel
- ◆ Easy and safe splitting

### Guide Wire (only in Exchange Set)

- ◆ PTFE-coated

## SUPRA-FIX-INTEGRALE Puncture-, Exchange- and Dilation Exchange Set 100% silicone, with integrated balloon

Puncture Set / Catheter							
Size (FR/CH)	Length (cm)	Balloon (ml)	Order Code only Balloon Catheter	Order Code Puncture Set	Split Cannula Size Ø (mm)	Split Cannula Length (cm)	
08	30	1.5	SU-270825	SU-110826	3.6	08	
10	30	3.0	SU-271025	SU-111026	4.6	08	
10	40	3.0	SU-271005	SU-111030	4.6	12	
12	30	5.0	SU-271225	SU-111226	4.6	08	
12	40	5.0	SU-271205	SU-111230	4.6	12	
14	30	5.0	SU-271425				
14	40	5.0	SU-271405	SU-111430	5.6	12	
16	30	5-10	SU-271625				
16	40	5-10	SU-271605				
18	30	5-10	SU-271825				
18	40	5-10	SU-271805				
20	30	5-10	SU-272025				
20	40	5-10	SU-272005				
22	30	5-10	SU-272225				
22	40	5-10	SU-272205				
24	40	5-10	SU-272405				

Exchange Set							
Size (FR/CH)	Length (cm)	Balloon (ml)	Order Code Exchange Set	Guide Wire Length (cm)	Guide Wire Diameter	Guide Wire Tip	Guide Wire Stiffness
08	30	1.5	SU-140826	100	0.025"	straight	standard
10	30	3.0	SU-141026	100	0.032"	straight	standard
10	40	3.0	SU-141030	100	0.032"	straight	standard
12	30	5.0	SU-141226	100	0.032"	straight	standard
12	40	5.0	SU-141230	100	0.032"	straight	standard
14	30	5.0	SU-141426	100	0.038"	straight	standard
14	40	5.0	SU-141430	100	0.038"	straight	standard
16	30	5-10	SU-141626	100	0.038"	straight	standard
16	40	5-10	SU-141630	100	0.038"	straight	standard
18	30	5-10	SU-141826	100	0.038"	straight	standard
18	40	5-10	SU-141830	100	0.038"	straight	standard
20	40	5-10	SU-142030	100	0.038"	straight	standard

Dilation Exchange Set								
Size (FR/CH)	Length (cm)	Balloon (ml)	Order Code Dilation Exchange Set	Dilator (FR/CH)	Guide Wire Length (cm)	Guide Wire Diameter	Guide Wire Tip	Guide Wire Stiffness
10	40	3.0	SU-141031	12	100	0.032"	straight	standard
12	40	5.0	SU-141231	14	100	0.032"	straight	standard
14	40	5.0	SU-141431	16	100	0.038"	straight	standard
16	40	5-10	SU-141631	18	100	0.038"	straight	standard