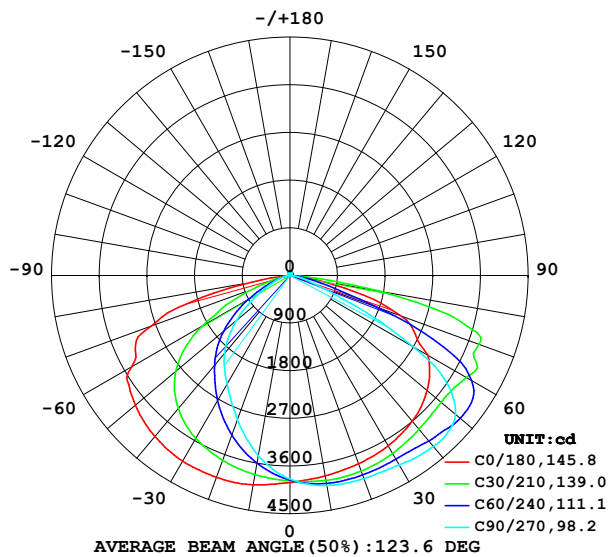
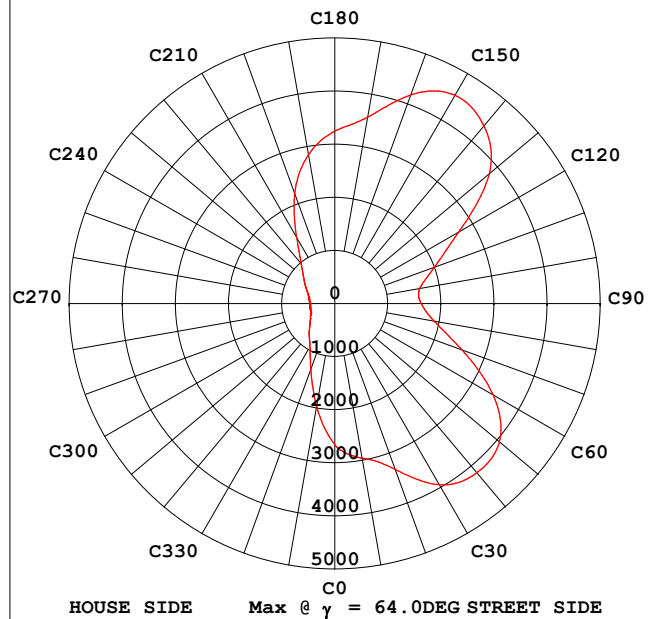


STREETLIGHT PHOTOMETRIC TEST REPORT

Test:U:222.5V I:0.4540A P:99.20W PF:0.9810 Freq:0Hz Lamp Flux:15110.8x1 lm		
NAME: 路灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: SHANGHAI CET ELECTRIC CO.,LTD	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 139.07 lm/W			
MODEL	CET-136-100W	I _{max} (cd)	4530	η street_up (%)	0.8
NOMINAL POWER (W)	100	LOR (%)	91.3	η street_down (%)	57.6
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	13795	η house_up (%)	1.0
NOMINAL FLUX (lm)	15110.8	MAXIMUM @ (C, γ)	150,64.0	η house_down (%)	31.9
LAMPS INSIDE	1	η up (%)	1.8	76 FLASHAREA (m2)	0.05000
TEST VOLTAGE (V)		η down (%)	89.5	SLI	22.417


INTENSITY DISTRIBUTION DIAGRAM
IN C PLANSMAX INTENSITY CONE SURFACE
DISTRIBUTION DIAGRAM

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2023-12-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity: 65.0%
Test Distance: 7.810m [K=1.0000]
Remarks:

STREETLIGHT ISOCANDELA DIAGRAM

Test:U:222.5V I:0.4540A P:99.20W PF:0.9810 Freq:0Hz Lamp Flux:15110.8x1 lm		
NAME: 路灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: SHANGHAI CET ELECTRIC CO.,LTD	SUR.:	Shielding Angle:

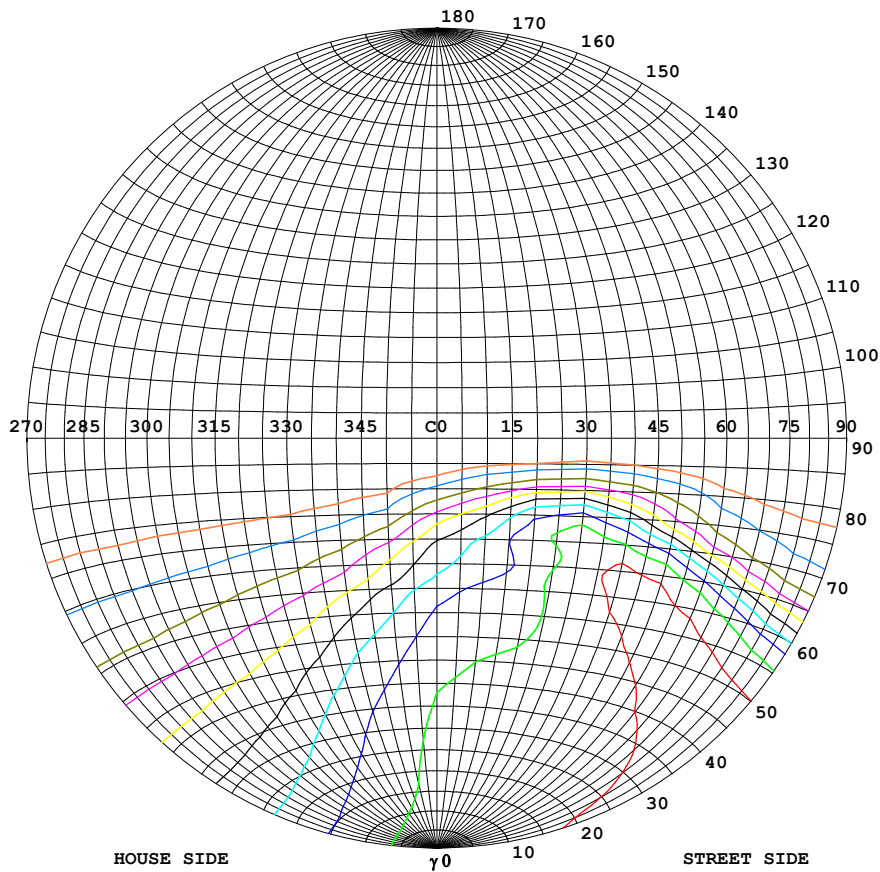

Classification:



IES:Type III - Short
CIE:Broad - Intermediate
IES:Semi cut-off
CIE:Non-cut-off
Max.At80:116.1cd/klm
Max.At90:2.659cd/klm
Max.80-90:116.1cd/klm

ISOCANDELA DIAGRAM	
UNIT	cd
Imax=100%	4530
90%	4077
80%	3624
70%	3171
60%	2718
50%	2265
40%	1812
30%	1359
20%	906
10%	453
5%	226

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2023-12-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:7.810m [K=1.0000]
Remarks:

COEFFICIENT OF UTILIZATION CURVE AND ISOLUX DIAGRAM

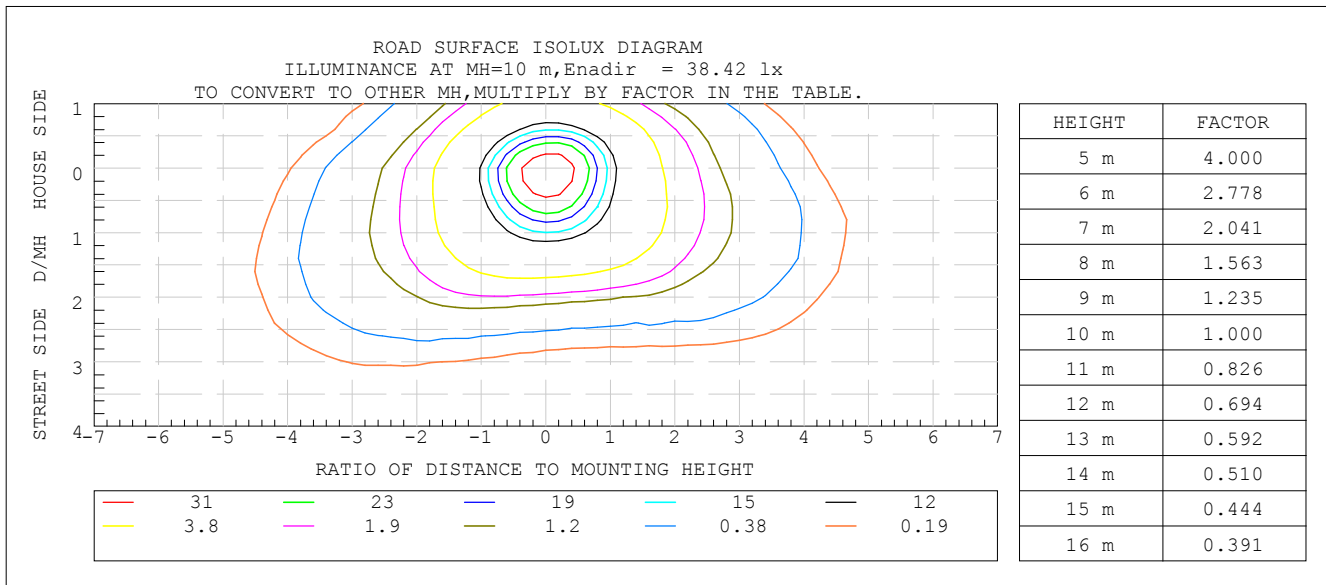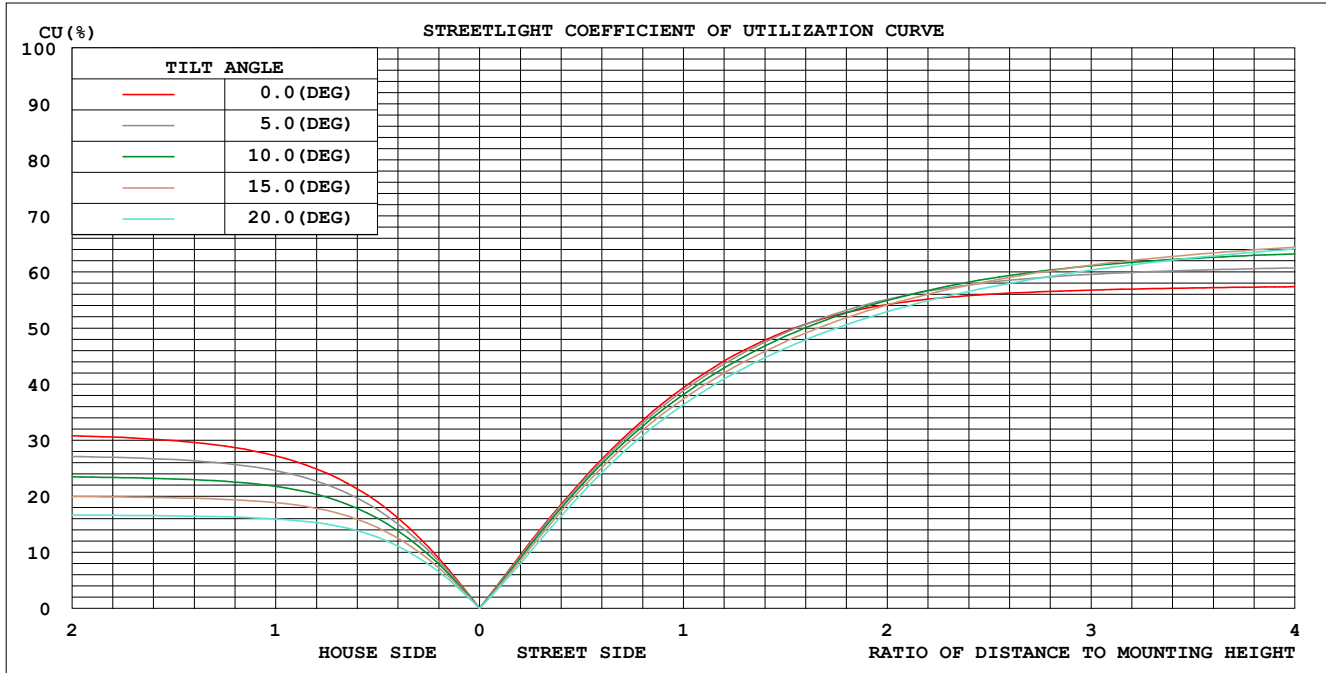

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2023-12-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity: 65.0%
Test Distance: 7.810m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

Test:U:222.5V I:0.4540A P:99.20W PF:0.9810 Freq:0Hz Lamp Flux:15110.8x1 lm		
NAME: 路灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: SHANGHAI CET ELECTRIC CO.,LTD	SUR.:	Shielding Angle:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	3844	3959	4027	4034	4014	3704	3459	3526	0- 10	366.0	366.0	2.65,2.42
20	3785	3969	4084	4118	4058	3458	2905	3135	10- 20	1061	1427	10.3,9.45
30	3714	3939	4130	4144	4051	3140	2377	2701	20- 30	1663	3090	22.4,20.4
40	3595	3922	4211	4239	3968	2679	1925	2217	30- 40	2152	5242	38,34.7
50	3382	4027	4081	4406	3811	2044	1319	1668	40- 50	2492	7734	56.1,51.2
60	3000	4160	2673	4378	3459	1246	671.6	967.4	50- 60	2559	10293	74.6,68.1
70	2206	3297	546.1	2574	2781	446.1	279.9	348.0	60- 70	2033	12326	89.4,81.6
80	515.0	925.5	153.3	522.6	735.7	114.5	71.82	102.5	70- 80	1046	13372	96.9,88.5
90	40.18	29.72	29.24	25.88	33.83	38.94	35.36	37.65	80- 90	151.3	13523	98,89.5
100	42.63	31.40	28.52	26.03	36.25	41.84	37.92	41.63	90-100	37.49	13561	98.3,89.7
110	45.03	34.83	30.26	28.20	39.38	44.14	41.94	44.92	100-110	38.78	13600	98.6,90
120	47.87	38.86	33.66	31.47	43.19	46.57	46.20	48.22	110-120	39.45	13639	98.9,90.3
130	50.04	42.91	37.86	35.18	46.84	49.57	49.97	51.14	120-130	38.61	13678	99.1,90.5
140	54.22	47.40	42.56	39.39	51.22	54.80	53.29	54.45	130-140	36.22	13714	99.4,90.8
150	60.50	52.59	47.36	44.78	56.39	59.79	57.58	58.60	140-150	32.32	13746	99.6,91
160	65.57	57.76	52.52	51.07	61.27	63.19	61.34	61.62	150-160	26.08	13772	99.8,91.1
170	67.59	62.32	57.44	57.01	65.26	65.00	62.65	62.71	160-170	17.08	13789	100,91.3
180	67.80	65.07	61.20	61.41	68.10	65.09	61.19	61.37	170-180	5.971	13795	100,91.3
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2023-12-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:7.810m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM


Test:U:222.5V I:0.4540A P:99.20W PF:0.9810 Freq:0Hz Lamp Flux:15110.8x1 lm		
NAME: 路灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: SHANGHAI CET ELECTRIC CO.,LTD	SUR.:	Shielding Angle:

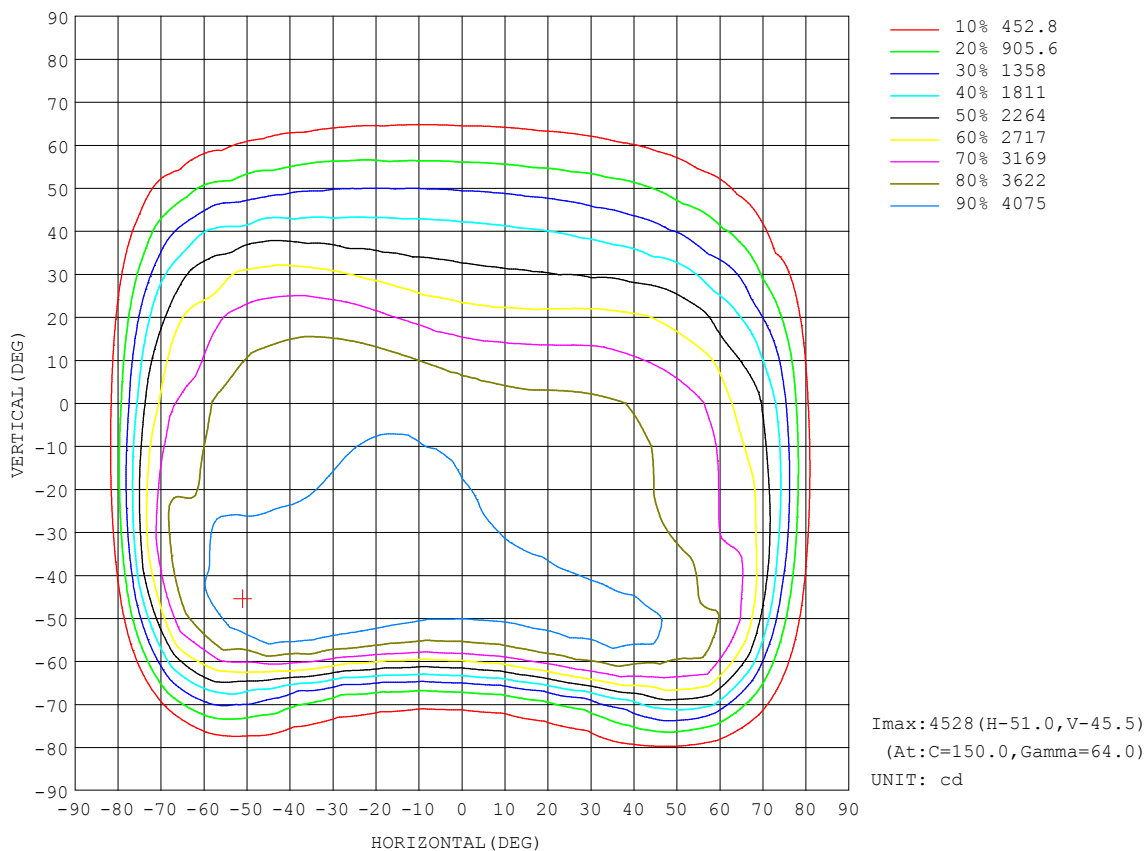

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2023-12-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity: 65.0%
Test Distance: 7.810m [K=1.0000]
Remarks:

Planar Illuminance Curve

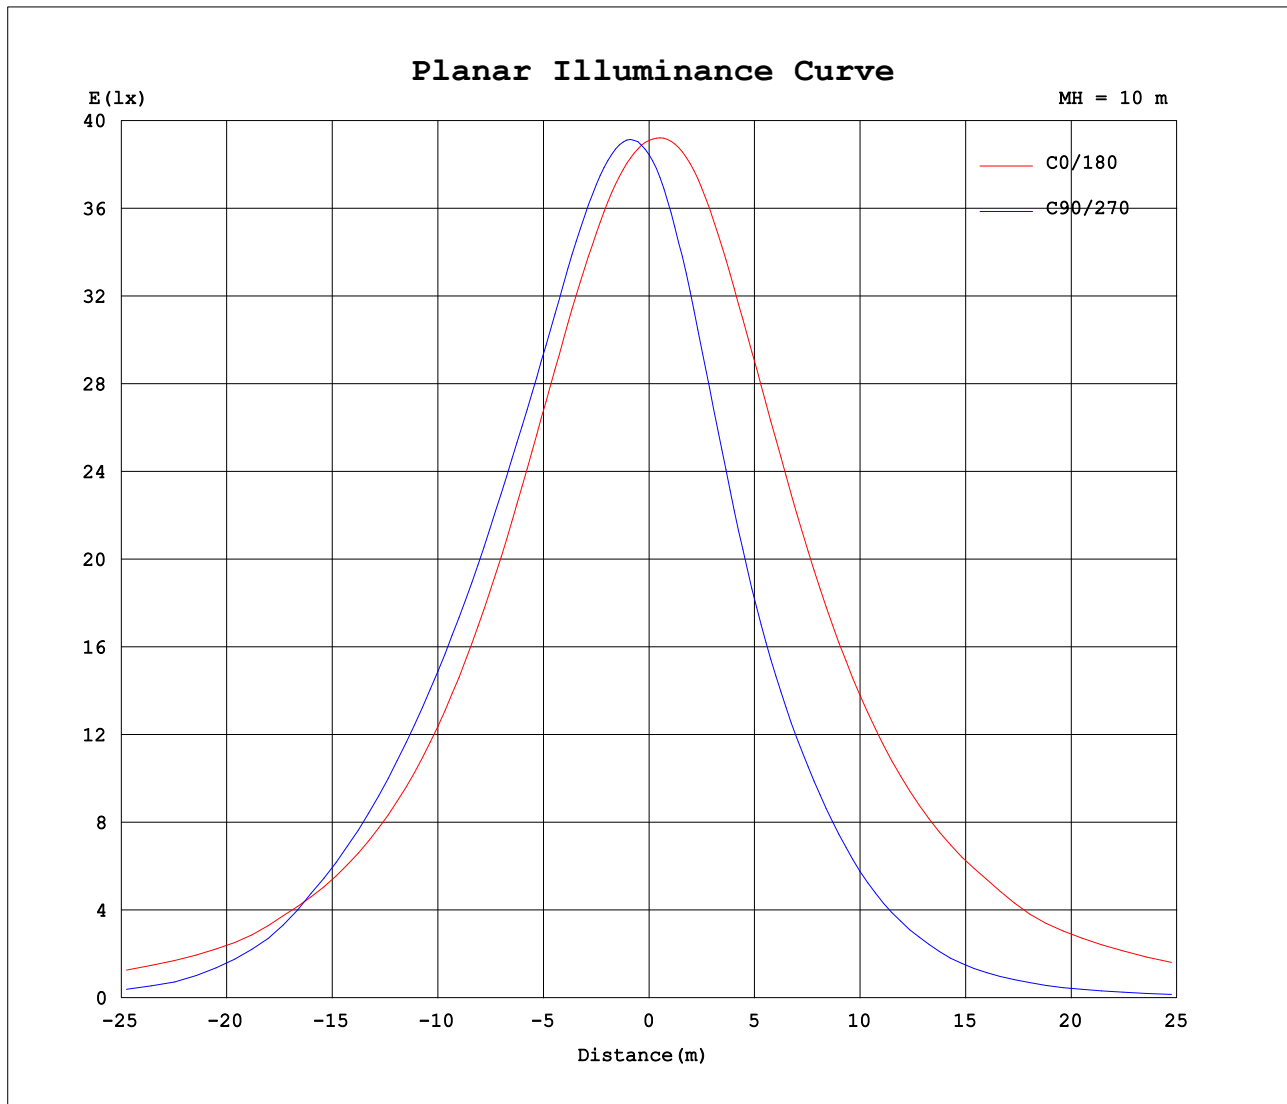


C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2023-12-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity: 65.0%
 Test Distance: 7.810m [K=1.0000]
 Remarks:

LCS REPORT

Test:U:222.5V I:0.4540A P:99.20W PF:0.9810 Freq:0Hz Lamp Flux:15110.8x1 lm		
NAME: 路灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: SHANGHAI CET ELECTRIC CO.,LTD	SUR.:	Shielding Angle:

LUMINAIRE CLASSIFICATION SYSTEM(LCS) GRAPH

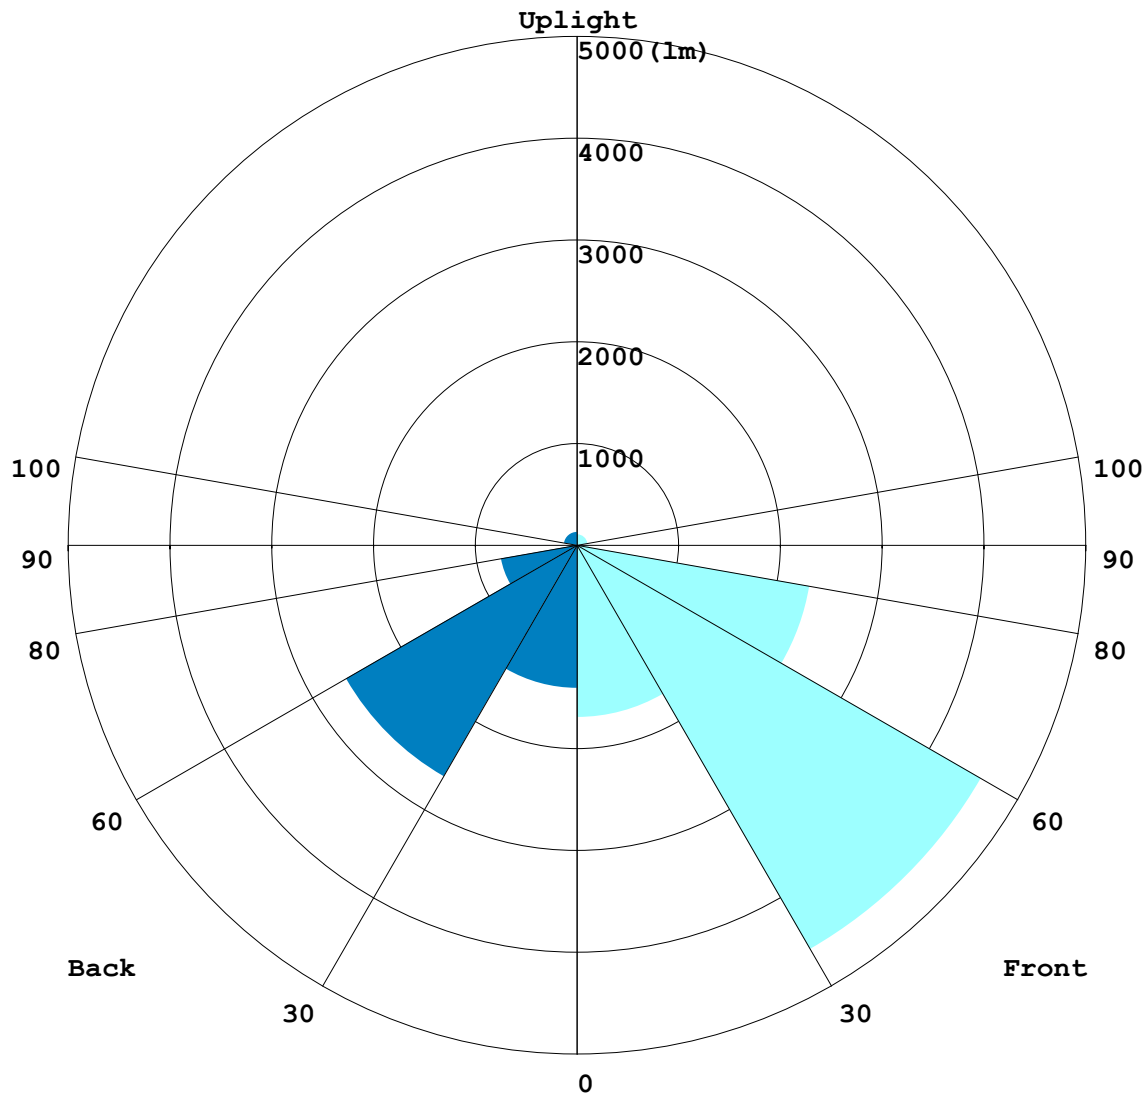

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2023-12-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:7.810m [K=1.0000]
Remarks:

BUG REPORT

Test:U:222.5V I:0.4540A P:99.20W PF:0.9810 Freq:0Hz Lamp Flux:15110.8x1 lm		
NAME: 路灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: SHANGHAI CET ELECTRIC CO.,LTD	SUR.:	Shielding Angle:

IESNA Luminaire Flux Distribution Table:

Zone	Lumens	Luminaire %
FL - Front-Low(0-30)	1687.6	12.2
FM - Front-Medium(30-60)	4580.8	33.2
FH - Front-High(60-80)	2320.3	16.8
FVH - Front-Very High(80-90)	115.47	0.8
Total Forward Light	8826.3	64.0

BL - Back-Low(0-30)	1402.4	10.2
BM - Back-Medium(30-60)	2622.2	19.0
BH - Back-High(60-80)	758.64	5.5
BVH - Back-Very High(80-90)	35.865	0.3
Total Back Light	4969	36.0

UL - Uplight-Low(90-100)	37.493	0.3
UH - Uplight-High(100-180)	234.5	1.7
Total Up Light	272	2.0

BUG(Back,Up,Glare) Rating	B3-U3-G2
---------------------------	----------

Zone	Downward Lumens	Upward Lumens	Total Lumens
House Side	4819.1	149.89	4969
Street Side	8704.2	122.1	8826.3


C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2023-12-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:7.810m [K=1.0000]
Remarks:

ROAD ISOCANDELA REPORT

Test:U:222.5V I:0.4540A P:99.20W PF:0.9810 Freq:0Hz Lamp Flux:15110.8x1 lm		
NAME: 路灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: SHANGHAI CET ELECTRIC CO.,LTD	SUR.:	Shielding Angle:

ROAD SURFACE ISOCANDELA DIAGRAM

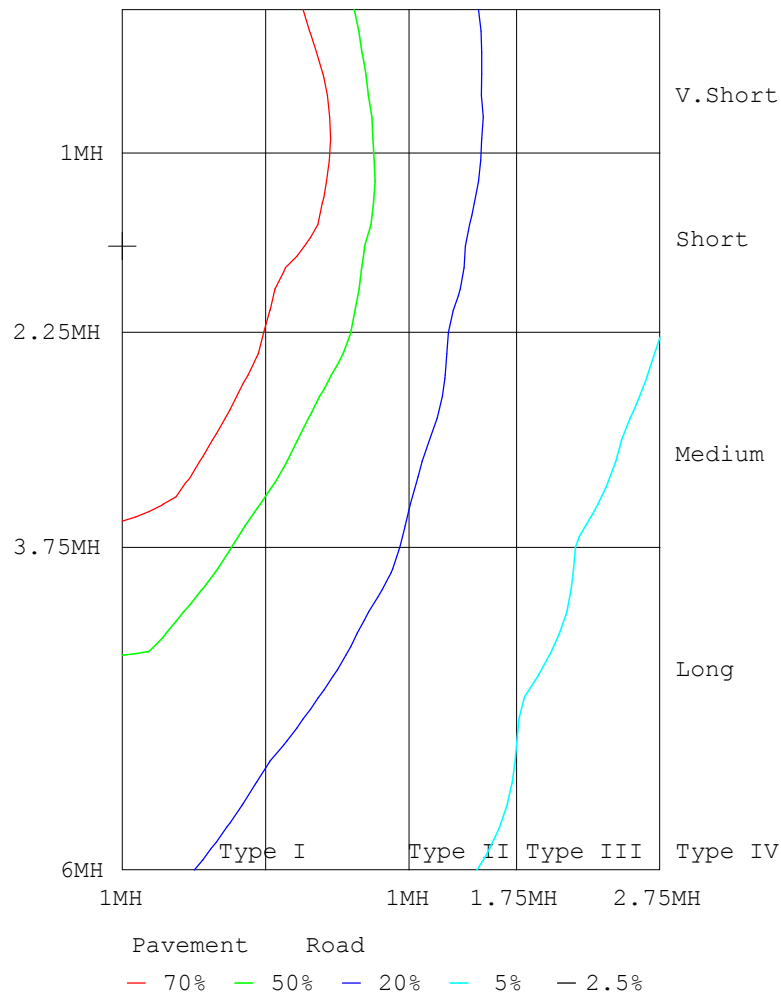

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2023-12-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:7.810m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:222.5V I:0.4540A P:99.20W PF:0.9810 Freq:0Hz Lamp Flux:15110.8x1 lm																		
NAME: 路灯									TYPE:					WEIGHT:				
SPEC.:									DIM.:					SERIAL No.:				
MFR.: SHANGHAI CET ELECTRIC CO.,LTD									SUR.:					Shielding Angle:				

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180
0	3911	3896	3890	3880	3870	3867	3864	3851	3862	3845	3847	3842	3842	3830	3830	3827	3821	3819	3911
5	3874	3881	3895	3906	3915	3929	3942	3945	3966	3959	3968	3965	3965	3949	3941	3927	3905	3887	3959
10	3844	3875	3906	3930	3948	3970	3987	3998	4025	4027	4041	4046	4049	4038	4031	4016	3989	3960	4014
15	3812	3861	3906	3940	3963	3988	4007	4021	4054	4065	4085	4094	4097	4091	4090	4079	4047	4011	4049
20	3785	3843	3895	3930	3955	3983	4008	4028	4068	4084	4109	4119	4124	4119	4116	4107	4073	4035	4058
25	3753	3821	3876	3912	3941	3975	4008	4037	4077	4095	4123	4140	4150	4142	4131	4111	4072	4038	4058
30	3714	3794	3844	3880	3918	3961	4004	4052	4104	4130	4162	4178	4182	4154	4134	4104	4062	4033	4051
35	3659	3751	3801	3837	3891	3954	4022	4087	4156	4186	4220	4243	4245	4198	4140	4099	4040	4010	4020
40	3595	3687	3742	3792	3869	3975	4079	4134	4189	4211	4254	4288	4308	4278	4201	4098	4016	3968	3968
45	3504	3620	3679	3753	3871	4036	4132	4183	4218	4210	4254	4331	4377	4352	4286	4132	3993	3920	3902
50	3382	3518	3597	3728	3940	4113	4197	4175	4121	4081	4112	4253	4387	4435	4378	4236	3999	3864	3811
55	3221	3394	3524	3752	4033	4193	4184	4025	3787	3671	3689	3928	4239	4447	4472	4350	4070	3821	3700
60	3000	3258	3475	3852	4120	4200	3959	3535	2964	2673	2683	3127	3740	4247	4508	4466	4215	3797	3459
65	2607	2935	3294	3885	4154	3951	3217	2290	1614	1366	1358	1711	2402	3554	4272	4519	4096	3577	3221
70	2206	2800	3506	3798	3638	2956	1705	971	641	546	547	677	977	1952	3196	3958	4067	3692	2781
75	1436	2174	3071	3310	2617	1435	755	444	322	300	300	338	465	849	1640	2783	3302	3025	1925
80	515	993	1527	1754	1179	672	309	195	160	153	151	164	197	346	699	1242	1630	1401	736
85	82.7	174	239	308	219	137	74.9	60.2	53.0	49.7	49.6	53.4	54.9	76.6	93.9	149	54.9	48.7	43.8
90	40.2	36.7	33.5	31.2	30.0	29.5	29.5	29.5	29.5	29.2	28.9	28.4	27.5	26.3	25.5	25.4	26.4	28.8	33.8
95	41.4	37.8	34.7	32.2	30.6	29.6	29.2	28.9	28.8	28.5	28.1	27.5	26.7	25.8	25.4	25.7	27.0	29.3	34.8
100	42.6	39.5	36.5	34.0	32.1	30.7	29.8	29.2	28.9	28.5	28.0	27.4	26.7	26.0	26.0	26.6	28.1	30.4	36.2
105	43.8	41.2	38.4	35.9	33.8	32.1	31.0	30.1	29.7	29.1	28.6	27.9	27.3	26.8	27.1	27.9	29.4	31.6	37.8
110	45.0	42.8	40.3	37.9	35.8	33.9	32.5	31.5	30.9	30.3	29.6	28.9	28.4	28.0	28.4	29.3	30.8	32.8	39.4
115	46.6	44.6	42.3	39.9	37.8	35.9	34.4	33.3	32.6	31.8	31.1	30.4	29.9	29.6	30.0	30.9	32.3	34.2	41.3
120	47.9	46.1	43.9	41.7	39.7	38.0	36.5	35.3	34.5	33.7	32.9	32.2	31.6	31.3	31.7	32.5	33.8	35.4	43.2
125	48.9	47.3	45.4	43.4	41.6	40.1	38.7	37.5	36.6	35.7	34.9	34.1	33.6	33.2	33.4	34.1	35.1	36.5	45.0
130	50.0	48.7	46.9	45.2	43.6	42.2	41.0	39.8	38.9	37.9	37.1	36.3	35.6	35.1	35.2	35.7	36.5	37.6	46.8
135	51.6	50.4	49.0	47.3	45.7	44.4	43.3	42.1	41.3	40.2	39.4	38.4	37.8	37.2	37.2	37.5	38.2	39.3	48.8
140	54.2	52.9	51.4	49.7	48.1	46.7	45.6	44.5	43.7	42.6	41.6	40.7	40.0	39.4	39.4	39.7	40.5	42.0	51.2
145	57.3	55.7	54.0	52.3	50.6	49.2	48.0	46.8	46.0	44.9	44.0	43.0	42.3	41.8	42.0	42.5	43.6	45.5	53.8
150	60.5	58.7	56.9	55.0	53.3	51.9	50.5	49.3	48.5	47.4	46.5	45.5	44.9	44.6	45.0	45.8	47.2	49.2	56.4
155	63.4	61.6	59.6	57.8	56.0	54.4	53.1	51.9	51.1	50.0	49.1	48.1	47.6	47.5	48.2	49.2	50.7	52.5	58.9
160	65.6	63.8	62.0	60.2	58.5	57.0	55.2	54.5	53.6	52.5	51.7	51.0	50.6	50.7	51.5	52.5	53.8	55.3	61.3
165	66.7	65.4	64.0	62.5	60.9	59.6	58.2	57.0	56.0	55.1	54.4	53.8	53.6	53.8	54.6	55.5	56.5	57.7	63.3
170	67.6	66.8	65.6	64.4	63.0	61.7	60.4	59.2	58.3	57.4	56.9	56.4	56.4	56.6	57.4	58.2	58.9	59.5	65.3
175	68.1	67.6	66.7	65.8	64.5	63.4	62.2	61.1	60.3	59.5	59.0	58.7	58.8	59.1	59.8	60.4	60.7	61.1	67.0
180	67.8	67.6	67.1	66.5	65.5	64.6	63.5	62.6	61.8	61.2	60.8	60.7	60.8	61.2	61.7	62.0	62.0	62.1	68.1

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2023-12-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:7.810m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:222.5V I:0.4540A P:99.20W PF:0.9810 Freq:0Hz Lamp Flux:15110.8x1 lm																	
NAME: 路灯									TYPE:						WEIGHT:		
SPEC.:									DIM.:						SERIAL No.:		
MFR.: SHANGHAI CET ELECTRIC CO.,LTD									SUR.:						Shielding Angle:		

Table--2

UNIT: cd

C (DEG) γ (DEG)	190	200	210	220	230	240	250	260	270	280	290	300	310	320	330	340	350		
0	3896	3890	3880	3870	3867	3864	3851	3862	3845	3847	3842	3842	3830	3830	3827	3821	3819		
5	3922	3890	3853	3814	3779	3753	3716	3710	3680	3680	3674	3684	3684	3703	3720	3739	3761		
10	3953	3892	3819	3742	3666	3599	3528	3495	3459	3448	3451	3478	3503	3550	3598	3648	3700		
15	3972	3884	3776	3654	3531	3416	3302	3238	3189	3173	3186	3237	3296	3381	3469	3556	3642		
20	3970	3861	3717	3547	3370	3208	3056	2968	2905	2891	2912	2984	3073	3197	3332	3469	3592		
25	3959	3823	3641	3426	3193	2981	2798	2697	2626	2613	2636	2721	2838	3006	3189	3374	3534		
30	3938	3773	3552	3286	2995	2737	2537	2439	2377	2362	2386	2464	2595	2807	3044	3274	3470		
35	3897	3701	3439	3114	2758	2472	2295	2216	2159	2147	2172	2235	2346	2576	2871	3154	3387		
40	3834	3600	3279	2889	2470	2216	2060	1981	1925	1918	1942	2015	2119	2314	2652	2998	3279		
45	3739	3467	3085	2602	2163	1948	1789	1695	1633	1631	1661	1755	1870	2049	2381	2811	3143		
50	3622	3278	2816	2237	1851	1630	1462	1372	1319	1317	1348	1439	1566	1770	2064	2555	2961		
55	3450	3028	2443	1830	1487	1279	1122	1036	963	972	1009	1112	1234	1435	1713	2212	2722		
60	3093	2587	1923	1387	1104	911	766	705	672	676	694	761	869	1066	1312	1766	2365		
65	2786	2113	1340	909	698	575	490	455	431	432	441	484	553	681	867	1233	1890		
70	2149	1375	727	506	386	336	306	291	280	283	283	301	320	376	481	707	1240		
75	1239	575	319	247	211	201	185	177	167	171	172	183	193	211	237	326	552		
80	377	184	134	123	107	101	89.4	81.8	71.8	75.2	76.4	90.3	96.7	108	120	139	186		
85	42.6	47.6	48.7	50.6	47.1	45.8	42.9	39.2	35.9	36.0	38.5	41.8	45.4	48.9	53.8	60.3	64.8		
90	36.8	39.1	39.8	39.4	38.4	37.1	36.0	35.3	35.4	35.3	35.7	36.3	37.2	38.2	39.1	39.1	38.3		
95	38.0	40.6	41.8	41.5	40.3	38.8	37.4	36.7	36.7	36.8	37.3	38.2	39.2	40.4	41.4	41.1	39.6		
100	38.9	41.2	42.4	42.3	41.4	40.2	38.9	38.1	37.9	38.2	39.1	40.1	41.2	42.0	42.5	41.6	40.1		
105	40.0	41.9	42.8	43.0	42.6	41.7	40.7	39.9	39.8	40.2	41.2	42.3	43.2	43.5	43.5	42.5	40.6		
110	41.3	42.9	43.8	44.2	44.1	43.4	42.5	41.9	41.9	42.3	43.3	44.2	44.9	45.0	44.5	43.2	41.3		
115	43.0	44.5	45.3	45.6	45.5	44.9	44.3	43.9	44.1	44.4	45.3	46.0	46.6	46.7	46.2	44.6	42.5		
120	44.8	46.0	46.4	46.6	46.5	46.3	46.1	46.0	46.2	46.5	47.3	47.9	48.2	48.2	47.4	45.6	43.5		
125	46.4	47.5	47.8	47.7	47.7	47.7	47.8	47.9	48.2	48.5	49.3	49.8	49.9	49.5	48.5	46.6	44.3		
130	48.2	49.3	49.6	49.6	49.5	49.4	49.4	49.5	50.0	50.4	51.0	51.5	51.4	50.9	49.7	47.8	45.7		
135	50.3	51.5	52.1	52.2	52.0	51.6	51.3	51.2	51.6	51.8	52.3	52.8	52.8	52.4	51.6	49.9	47.8		
140	52.7	54.0	54.7	54.9	54.7	54.2	53.6	53.2	53.3	53.3	53.8	54.2	54.5	54.4	53.8	52.3	50.2		
145	55.4	56.7	57.4	57.5	57.3	56.9	56.1	55.5	55.3	55.2	55.6	56.0	56.4	56.6	56.2	54.8	52.7		
150	57.9	59.3	59.8	59.9	59.7	59.1	58.4	57.9	57.6	57.4	57.6	58.0	58.5	58.7	58.5	57.3	55.2		
155	60.1	61.3	61.8	61.8	61.5	61.0	60.3	59.8	59.8	59.5	59.6	59.8	60.1	60.4	60.3	59.3	57.5		
160	62.1	63.1	63.5	63.4	63.0	62.5	61.9	61.4	61.3	61.1	61.2	61.3	61.5	61.7	61.5	60.6	59.3		
165	63.8	64.5	64.7	64.5	64.1	63.6	62.9	62.5	62.4	62.1	62.2	62.3	62.4	62.5	62.4	61.7	60.7		
170	65.3	65.7	65.6	65.3	64.7	64.1	63.3	62.9	62.7	62.4	62.3	62.4	62.6	62.8	62.8	62.4	61.8		
175	66.7	66.7	66.2	65.7	65.0	64.2	63.2	62.6	62.1	61.8	61.8	61.9	62.1	62.5	62.6	62.5	62.3		
180	67.5	67.2	66.3	65.6	64.6	63.7	62.6	61.8	61.2	60.8	60.7	60.9	61.1	61.6	62.0	61.9	62.1		

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2023-12-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:7.810m [K=1.0000]
Remarks: