

Specificații tehnice

[Acest tabel va fi completat de către ofertant în coloanele 2, 3, 4, 6, 7, iar de către autoritatea contractantă
– în coloanele 1, 5,]

Numărul procedurii de achiziție conform SIA RSAP / 21196983 / ocds-b3wdp1-MD-1712056621564
Obiectul achiziției: Compresor mobil cu șurub cu motor diesel nou

Denumirea bunurilor/serviciilor	Denumirea modelului bunului/serviciului	Țara de origine	Producătorul	Specificarea tehnică deplină solicitată de către autoritatea contractantă	Specificarea tehnică deplină propusă de către ofertant	Standarde de referință
1	2	3	4	5	6	7
Compresor mobil cu șurub cu motor diesel nou	Compresor mobil cu șurub cu motor dieselAtlas Copco XATS 68 KD 10.3 bar / 3.5 m ³ /min	Belgia	Atlas Copco	Compresor mobil cu șurub cu motor diesel nou cu următoarele caracteristici de bază: -debit minim 3,0 mc/min la 7 bar -motor cu pompa electrică de combustibil -echipament cu două filtre de aer - unul pentru compresor și altul pentru motorul diesel -compresor mobil, remorca fără sistem de frânare -remorca se v-a livra cu Omologare Europeană de Tip în vederea înmatriculării -rezervor combustibil - minim 30 l -panou de comandă cu indicarea temperaturii aerului comprimat -sistem cu reglarea temperaturii aerului comprimat în funcție de temperatura ambientală	Compresor mobil cu șurub cu motor diesel nou cu următoarele caracteristici de bază: -debit 3.5 mc/min la 10.3 bar -motor Kubota V1505-T cu pompa electrică de combustibil -echipament cu două filtre de aer - unul pentru compresor și altul pentru motorul diesel -compresor mobil, remorca fără sistem de frânare -remorca se v-a livra cu Omologare Europeană de Tip în vederea înmatriculării	EU STAGE3A

					-rezervor combustibil - minim 60 l -panou de comandă cu indicarea temperaturii aerului comprimat si a presiunii -sistem cu reglarea temperaturii aerului comprimat în funcție de temperatura ambientală	
TOTAL						

Semnat:_____ Numele, Prenumele: Cojocar Alexandru În calitate de: Administrator

Ofertantul: Premium Vector S.R.L. Adresa: r-nul Edinet, or. Cupcini, str. A. Puskin, 22



Standard Scope of Supply

The Atlas Copco **XATS 68-XAS 88 KD** is a single-stage, oil-injected, rotary screw type air compressor range, powered by a liquid-cooled, four-cylinder Kubota diesel engine.

The unit hosts the new generation C67 Screw element in its air end, combined with a Kubota made diesel engine model V1505 or V1505-T, complying with the EU Stage 3A emission standard. Different pressure variants are available.

Special attention has been given to the overall product quality, user friendliness, ease of serviceability, and economical operation to ensure best in class cost of ownership.

Features

Benefits

- | | |
|--|---|
| <ul style="list-style-type: none">• Compact, fuel-efficient engine• Designed with environmental protection in mind• Compact, sound attenuated, corrosion resistant enclosure• HardHat™ hood and 3-layer painting of metal parts | <ul style="list-style-type: none">• Saves up to 12% of fuel on typical applications in this range.• The unit comes with a Spillage Free frame as standard with 110% fluid containment and EU Stage3A emission compliant engine, this makes the compressor suitable for use in all areas of the EU.• For OND compliance the unit is enclosed in a sound attenuated Zincor steel enclosure.
Compact and maneuverable, saving valuable space on your job site and during transportation, weighing less than 750 kg.• High residual value and low repair costs |
|--|---|

Main data

Model		XATS 68 KD	XAS 78 KD	XAS 88 KD
Minimum effective receiver pressure	bar(g)	2	2	2
Maximum effective receiver pressure (Unloaded)	bar(g)	12,5	8,8	8,8
Normal effective working pressure	bar(g)	10,3	7	7
Actual free air delivery	m³/min	3,5	4,5	5,0
Fuel consumption				
at 100% FAD (full load)	kg/h	8,17	8,17	8,17
at 75% FAD	kg/h	6,83	6,83	6,83
at 50% FAD	kg/h	5,3	5,3	5,3
at 25% FAD	kg/h	2,93	2,93	2,93
Specific fuel consumption at 100% FAD	g/m³	39,81	30,83	30,83
Maximum typical oil content of compressed air	mg/m³	5	5	5
Max. sound power level (Lw @ 2000/14/EC)	dB(A)	98	98	98
Max. sound pressure level (Lp @ ISO 2151)	dB(A)	70	70	70
Compressed air temperature at outlet valve	°C	78,5	83,2	83,2
Max. ambient temperature at sea level	°C	50	50	50
Min. starting temperature with CS equipment	°C	-20	-20	-20
Min. starting temperature without CS equipment	°C	-10	-10	-10
Engine		Kubota	Kubota	Kubota
Type		V1505-T	V1505-T	V1505-T
Emission stage		EU Stage3A	EU Stage3A	EU Stage3A
Coolant		ParCool	ParCool	ParCool
Number of cylinders		4	4	4
Bore	mm	78	78	78
Stroke	mm	78,4	78,4	78,4
Swept volume	l	1,498	1,498	1,498
Engine power at normal shaft speed @ ISO 9249G	kW	33	33	33
Full Load	rpm	3000	3000	3000
Unload	rpm	1850	1850	1850
Capacity of oil sump: - Initial fill	l	5,5	5,5	5,5
Capacity of oil sump: - Refill (max)	l	5,35	5,35	5,35
Capacity of cooling system	l	8,5	8,5	8,5
Capacity of compressor oil system	l	8	8	8
Net capacity of air receiver	l	12	12	12
Air volume at inlet grating (approx.)	m³/s	0,93	0,93	0,93
Capacity of standard fuel tanks	l	60	60	60
Safety valve - minimum opening pressure	bar(g)	14,1	9,9	9,9

XATS 68 - XAS 88 KD APP - Product Reference

Model		XAS 68 KDG 6kVA 110 V	XAS 68 KDG 6kVA 400 V	XAS 88 KDG 6,5kVA 110 V
Minimum effective receiver pressure	bar(g)	2	2	2
Maximum effective receiver pressure (Unloaded)	bar(g)	8,8	8,8	8,8
Normal effective working pressure	bar(g)	7	7	7
Actual free air delivery	m³/min	3,5	3,5	5,0
Fuel consumption				
at 100% FAD (full load)	kg/h	6,68	6,68	8,17
at 75% FAD	kg/h	5,61	5,61	6,83
at 50% FAD	kg/h	4,12	4,12	5,3
at 25% FAD	kg/h	3,1	3,1	2,93
Specific fuel consumption at 100% FAD	g/m³	30,67	30,67	30,83
Maximum typical oil content of compressed air	mg/m³	5	5	5
Max. sound power level (Lw @ 2000/14/EC)	dB(A)	98	98	98
Max. sound pressure level (Lp @ ISO 2151)	dB(A)	70	70	70
Compressed air temperature at outlet valve	°C	80,8	80,8	82
Max. ambient temperature at sea level	°C	50	50	50
Min. starting temperature with CS equipment	°C	-20	-20	-20
Min. starting temperature without CS equipment	°C	-10	-10	-10
Engine		Kubota	Kubota	Kubota
Type		V1505-T	V1505-T	V1505-T
Emission stage		EU Stage3A	EU Stage3A	EU Stage3A
Coolant		ParCool	ParCool	ParCool
Number of cylinders		4	4	4
Bore	mm	78	78	78
Stroke	mm	78,4	78,4	78,4
Swept volume	l	1,498	1,498	1,498
Engine power at normal shaft speed @ ISO 9249G	kW	33	33	33
Full Load	rpm	3000	3000	3000
Unload	rpm	1850	1850	1850
Capacity of oil sump: - Initial fill	l	5,5	5,5	5,5
Capacity of oil sump: - Refill (max)	l	5,35	5,35	5,35
Capacity of cooling system	l	8,5	8,5	8,5
Capacity of compressor oil system	l	8	8	8
Net capacity of air receiver	l	12	12	12
Air volume at inlet grating (approx.)	m³/s	0,93	0,93	0,93
Capacity of standard fuel tanks	l	60	60	60
Safety valve - minimum opening pressure	bar(g)	9,9	9,9	9,9
Alternator		MECC ALTE	MECC ALTE	MECC ALTE
Type		S16F-150/A	T16F-130A	S16F-180/A
Insulation class		H	H	H
Rated output, class H temp. rise	kVA	6	6	6,5
Standard		IEC 34-1	IEC 34-1	IEC 34-1
Number of phases		1	3	1
Fault current protection, residual current release, Idn	A	0,03	10	0,03
Circuit-breaker 1ph: Number of poles		2	4	2
Circuit-breaker 1ph: Thermal release (It)	A	50	10	63
Circuit-breaker 1ph: Magnetic release	%In	300-500	300-500	300-500
Circuit-breaker 1ph: Rated current (In)	A	50	10	63
Air/Electricity operating mode*		Simultaneous	Simultaneous	Semi-simultaneous

* Simultaneous: full FAD and full electric power available at the same time

Semi-simultaneous: air and electric power available at the same time, but not both at full load

XATS 68 - XAS 88 KD APP - Product Reference

Model		XAS 48 KDG 12kVA 400 V	XAS 68 KDG 12kVA 400 V	XAS 88 KDG 9kVA 400 V
Minimum effective receiver pressure	bar(g)	2	2	2
Maximum effective receiver pressure (Unloaded)	bar(g)	8,8	8,8	8,8
Normal effective working pressure	bar(g)	7	7	7
Actual free air delivery	m³/min	2,5	3,5	5,0
Fuel consumption				
at 100% FAD (full load)	kg/h	4,89	6,68	8,17
at 75% FAD	kg/h	3,96	5,61	6,83
at 50% FAD	kg/h	3,12	4,12	5,3
at 25% FAD	kg/h	2,29	3,1	2,93
Specific fuel consumption at 100% FAD	g/m³	36,51	30,67	30,83
Maximum typical oil content of compressed air	mg/m³	5	5	5
Max. sound power level (Lw @ 2000/14/EC)	dB(A)	98	98	98
Max. sound pressure level (Lp @ ISO 2151)	dB(A)	70	70	70
Compressed air temperature at outlet valve	°C	76	80,8	83,2
Max. ambient temperature at sea level	°C	50	50	50
Min. starting temperature with CS equipment	°C	-20	-20	-20
Min. starting temperature without CS equipment	°C	-10	-10	-10
Engine		Kubota	Kubota	Kubota
Type		V1505-T	V1505-T	V1505-T
Emission stage		EU Stage3A	EU Stage3A	EU Stage3A
Coolant		ParCool	ParCool	ParCool
Number of cylinders		4	4	4
Bore	mm	78	78	78
Stroke	mm	78,4	78,4	78,4
Swept volume	l	1,498	1,498	1,498
Engine power at normal shaft speed @ ISO 9249G	kW	33	33	33
Full Load	rpm	3000	3000	3000
Unload	rpm	1850	1850	1850
Capacity of oil sump: - Initial fill	l	5,5	5,5	5,5
Capacity of oil sump: - Refill (max)	l	5,35	5,35	5,35
Capacity of cooling system	l	8,5	8,5	8,5
Capacity of compressor oil system	l	8	8	8
Net capacity of air receiver	l	12	12	12
Air volume at inlet grating (approx.)	m³/s	0,93	0,93	0,93
Capacity of standard fuel tanks	l	60	60	60
Safety valve - minimum opening pressure	bar(g)	9,9	9,9	11,6
Alternator		MECC ALTE	MECC ALTE	MECC ALTE
Type		T20FS-160/A	T20FS-160/A	T20FS-160/A
Insulation class		H	H	H
Rated output, class H temp. rise	kVA	12,5	12,5	12,5**
Standard		IEC 34-1	IEC 34-1	IEC 34-1
Number of phases		3	3	3
Fault current protection, Insulation resistance	kOhm	10	10	10
Circuit-breaker 3ph: Number of poles		4	4	4
Circuit-breaker 3ph: Thermal release (It)	A	16	16	13
Circuit-breaker 3ph: Magnetic release	%In	300-500	300-500	300-500
Circuit-breaker 3ph: Rated current (In)	A	16	16	13
Air/Electricity operating mode*		Simultaneous	Semi-simultaneous	Semi-simultaneous

* Simultaneous: full FAD and full electric power available at the same time

Semi-simultaneous: air and electric power available at the same time, but not both at full load

** limited to 9 kVA by main circuit breaker

Dimensions

See dimension drawing

Principle Data

Compressor Element

The quality of a compressor can be measured through the reliability, efficiency and durability of the compressor element used. Through decades of expertise in the design of compressor elements, the result is the production of most efficient and reliable compressors in the market. When the screw element is efficient durability excels, maintenance intervals decrease and fuel consumption goes down.

The **XATS 68 - XAS 88 KD** compressors utilize an Atlas Copco C67 element which is driven from the diesel engine. Inlet air is filtered through a heavy duty two stage air filter.

Air/Oil Separator

Air and oil separation is achieved through a centrifugal oil separator combined with a filter element. The vessel is either CE or ASME/CRN/MOM/AS1210 approved, and stamped accordingly.

Designed for a higher maximum working pressure, the separator is equipped with a high pressure sealed and certified safety relief valve (automatic blow-down valve).

Cooling System

The cooling system consists of integrated side-by-side aluminum coolers with an axial fan to ensure optimum cooling. The fan is protected by a guard for operator safety. There is an access port for easy cleaning of coolers.



The cooling system is suitably designed for continuous operation in ambient conditions up to 50°C, with canopy doors closed.


Engine

A Kubota V1505 naturally aspirated or V1505-T turbocharged, four-cylinder, liquid-cooled diesel engine provides ample power to operate the compressor continuously at full load.


Cold start options are available for temperatures down to -20°C.

The 60-liter fuel tank is sufficiently sized to allow full shift autonomy (8 hours).

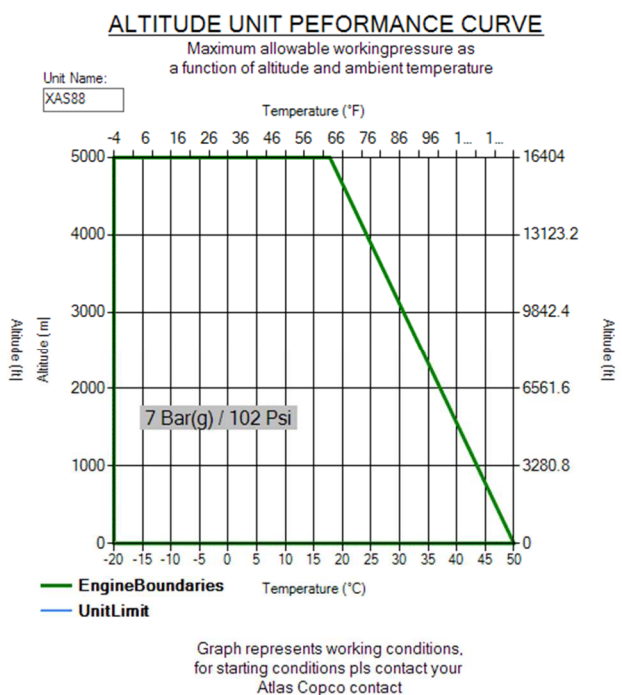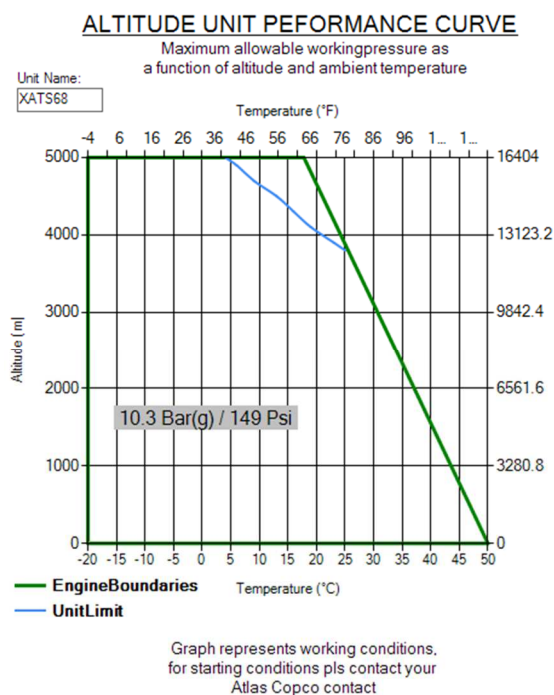


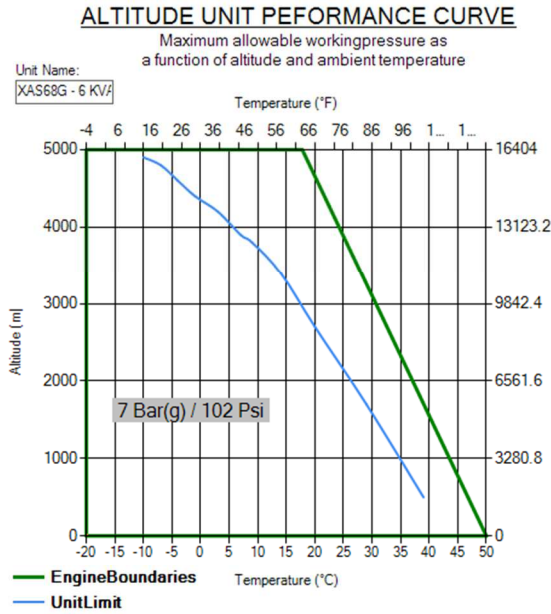

Graph represents working conditions.
for starting conditions pls contact your
Atlas Copco contact

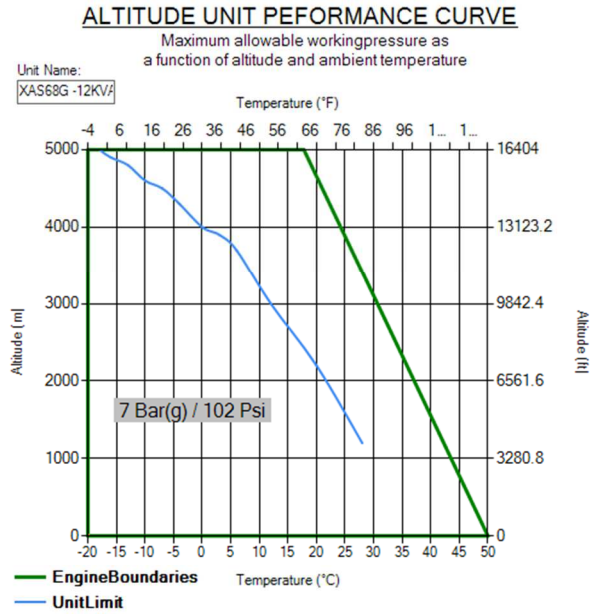

Graph represents working conditions.
for starting conditions pls contact your
Atlas Copco contact

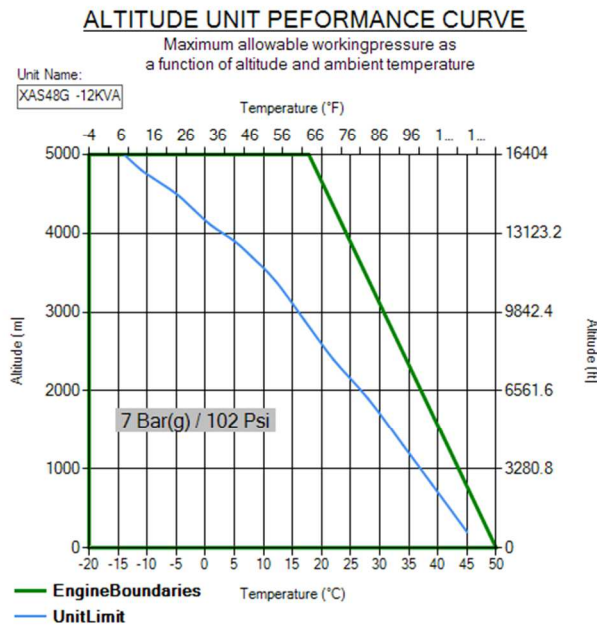

Graph represents working conditions.
for starting conditions pls contact your
Atlas Copco contact

For the curve of XAS78, please refer to XAS88.

Electrical System

The **XATS 68 - XAS 88 KD** is equipped with a 12 Volt negative ground electrical starting system.

Instrumentation

The instrument control panel is located at the rear of the compressor canopy with easy access.
The standard instrument package includes an operating pressure gauge, a starter switch, a running hour counter, and 2 warning lamps.

The starter switch has an integrated lockout mechanism to prevent starter motor damage.



Bodywork

The compressor's frame comes standard with ASTM A653 Zincor steel platework with powder coat paint finish providing excellent corrosion protection. The canopy is sound attenuated to meet the most current legal noise requirements.

Undercarriage

The XATS 68 - XAS 88 KD compressors are available with a choice of undercarriages, providing utmost flexibility in installation or towing requirements.

All undercarriage types can be partially disassembled and/or adjusted vertically upwards, to allow for sideways **truck loading**, up to 9 units per truck.

With the Fixed without brakes undercarriage type, even sideways **container loading** is also possible, allowing up to 8 units per container.

Options

The following options are available:

- Undercarriage
 - Adjustable without brakes
 - Adjustable with brakes
 - Fixed without brakes
 - Fixed with brakes
 - DoT approved
 - Support mounted
 - Extended support mounted
- Towing eyes
 - AC
 - Ball coupling
 - DIN
 - GB
 - ITA
 - NATO
- Towbar supports
 - Support leg
 - Jockey wheel
- Road light systems
 - Normal
 - LED
 - DoT approved non-LED
 - Reflectors only
- Quality air equipment
 - Aftercooler with optional bypass valve
 - Lubricator
 - Reheater
 - Non return valve
- Pressure vessel
 - CE approved
 - Multi-approved (ASME/CRN/MOM/AS1210)
- Anti-theft device
- Additional fuelfilter
- Safety cartridge
- Toolbox
- Cold weather equipment (thermostatic bypass valve and synthetic oil)
- Hose reel
- Refinery equipment
 - Spark arrester
 - Inlet shutdown valve
- Customized appearance
 - Special labelling
 - Special coloured hood
 - Special coloured frame
 - Special coloured bumper
- Connectivity
 - Fleetlink™

Supplied Documentation

The unit is delivered with documentation regarding:

- Hard copies of the Atlas Copco Operators Safety and Instruction Manual, Atlas Copco Parts Book, Kubota Engine Manual and Parts book, as well as electronic copies available on request.
- Warranty Registration card for engine and Atlas Copco Compressor (Units must be registered upon receipt).
- Certificate for air/oil separator vessel and safety valve approval (Upon request only).

Warranty Coverage

Please refer to product presentation for warranty info

Extended Warranty Programs are available; please contact your local sales representative for more info.