

UDS-N2 LED

Detachable handpiece with light

Microcomputer control and automatic frequency tracking

Automatic degenerative feedback and constant power output brings rather comfortable scaling.

Water pressure: 0.1bar~5bar(0.01MPa~0.5MPa)

Main unit input: ~24V 50HZ

Main unit weight: 0.2kg

Output power: 38VA

Frequency: 28kHz ± 3KHz

Dimensions: 74mmX56mmX38mm

UDS-N2 LED

Match detachable handpiece HW-5L


UDS-N2

Match detachable handpiece HW - 3H



Compatibility of tip

The working frequency range of Swiss E brand: < 32000Hz

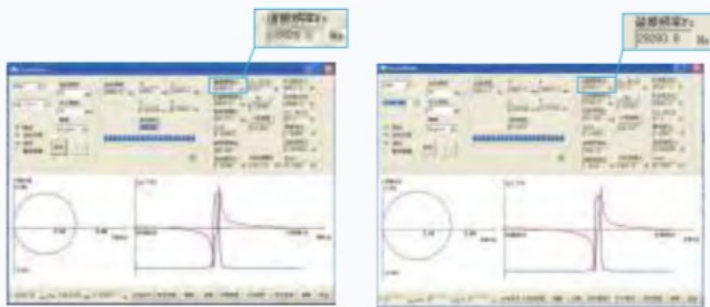

Woodpecker tip can perfectly match E brand scaler

Compatibility of handpiece

Woodpecker: Resonant frequency

E brand: Resonant frequency



Technical data of Woodpecker handpiece is the same as that of E brand. Handpiece of both brands can be exchanged.

Smooth tip does no harm to teeth

Select high-quality medical material which is durable and wear-resistant. Adopt advanced laser drilling technology and experience 35 strict production processes as well as 5 inspections.



The picture shows the image of tips after a 160 times magnification.