
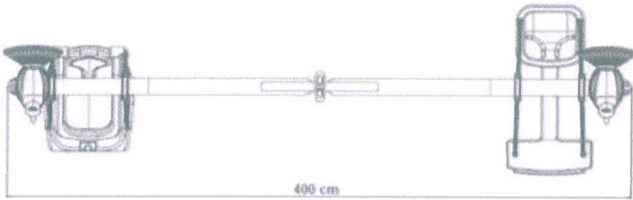


Swing SK 105

Made of two galvanized metal pipes (pipe diameter 11.4 cm, thickness 2.5 mm). The upper parts of the pillars will be provided with plastic plugs, fixed with two aluminum rivets. It will be provided with two basket-type swing posts and a child-accompanying person, made of polyethylene, provided with chains and fixed to the pipes with fastening elements.

Installation requirements: To ensure safe and reliable operation, all support elements are to be sunk into the ground (earth) by 0.75 m to increase rigidity, followed by concreting (BC 300 concrete). The assembly of the elements must exclude the possibility of their disassembly without the use of special tools.

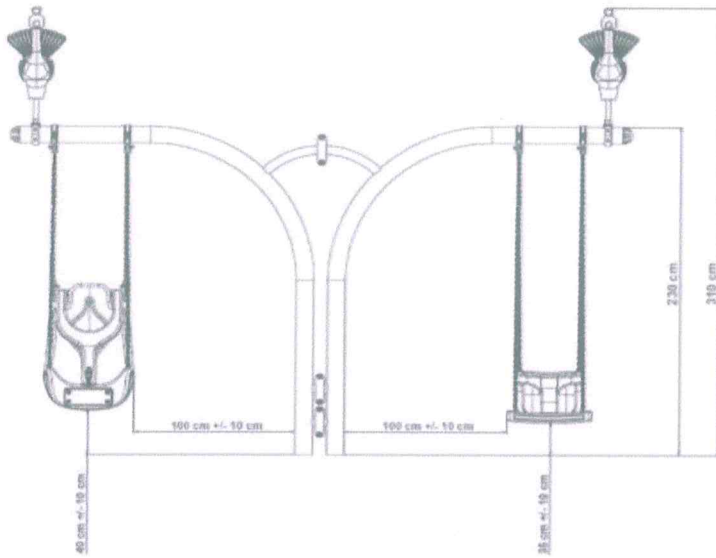


İSİLTİ ÇOCUK OYUN GRUPLARI PLASTİK SAN. TİC. A.Ş.
Büyükkayacık Mah. 410. Mh. 61. No 1 Selçuklu/KOİ
Tel: +90 332 502 10 79 E-posta: bilgi@isiltiplastik.
Selçuk V.D. 468 058 7185 Ticaret Sicil No: 72