
## Structure & ordering information



Product	Catalog No.	Outer diameter			Inner diameter		Haabla lawada	Recommended
		Tip	Distal shaft	Proximal shaft	Tip	Shaft	Usable length	GW
ASAHI	CSR135-26P	0.42 <sub>mm</sub> (1.3 <sub>Fr</sub> )	0.87 <sub>mm</sub> (2.6 <sub>Fr</sub> )	0.93 <sub>mm</sub> (2.8 <sub>Fr</sub> )	0.38 <sub>mm</sub> (0.015 <sub>inch</sub> )	0.45 mm (0.018 inch)	135 cm	0.36 <sub>mm</sub> (0.014 <sub>inch</sub> )
Corsair Pro	CSR150-26P	0.42 <sub>mm</sub> (1.3 <sub>Fr</sub> )	0.87 <sub>mm</sub> (2.6 <sub>Fr</sub> )	0.93 <sub>mm</sub> (2.8 <sub>Fr</sub> )	0.38 <sub>mm</sub> (0.015 <sub>inch</sub> )	0.45 <sub>mm</sub> (0.018 <sub>inch</sub> )	150cm	0.36 <sub>mm</sub> (0.014 <sub>inch</sub> )

© 2016 ASAHI INTECC CO., LTD. 
"ASAHI", "Corsair Pro" and "Corsair" are trademarks or registered trademarks of ASAHI INTECC CO., LTD. in Japan and other countries.


Manufactured by:

Distributed by:



ASAHI INTECC CO.,LTD.

3-100 Akatsuki-cho, Seto, Aichi 489-0071 Japan Contact phone number: +81-561-86-9101 http://www.asahi-intecc.com

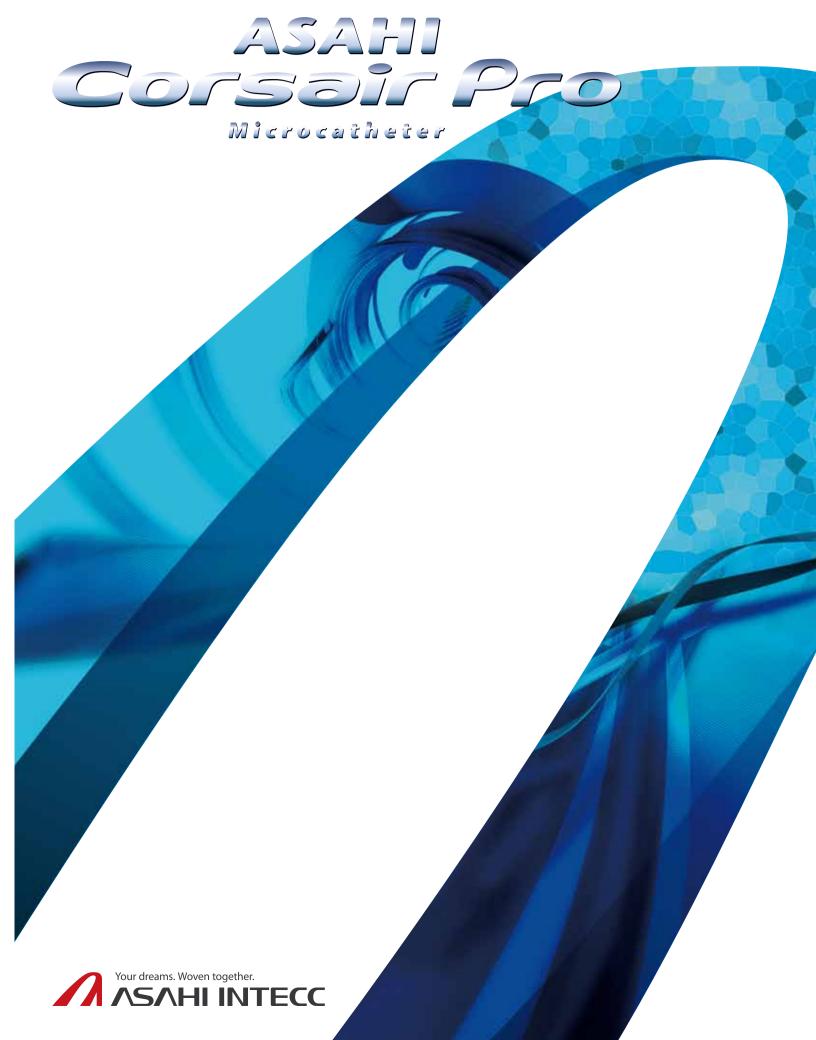




Delivering excellence through evolution and tradition.

Evolution

Tradition



Gradual balance of stiffness from the tip to the joint of the shaft area enhances tracking ability.

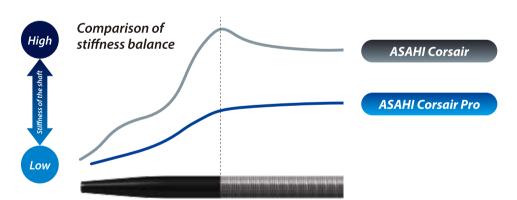

## **Spiral protector**



Enhanced kink resistance prevents damage when removing from holder or when shaft is bent

### SHINKA-Shaft

#### SHINKA-Shaft (Stainless coil shaft with 10 braided wire)

ASAHI brand proprietary braiding pattern preserves high push and enables rotating manipulation. (Rotation limited up to 10 times towards each direction)

# Tapered soft tip

### Tapering to 0.42mm (1.3Fr) + High visibility

- High visibility at the lesion part
- · High tracking ability into the lesion
- Entire tip is visible under fluoroscope

