

## Anexa 1 – Specificația tehnică I

### Microscop optic binocular cu camera si fluorescenta

Specificația cerută	Specificația propusă
<p>Stand ergonomic prevazut cu iluminare Led, durata de viata minim 25.000 ore de lucru la intensitate maxima cu asigurarea unei bune stabilitati si a max. de spatiu de lucru in jurul microscopului</p> <p>Maner de transport al microscopului si suport de infasurare al cablului de alimentare incorporat, pentru a facilita transportul si depozitarea microscopului.</p> <p>Stand acoperit cu vopsea speciala ce inhiba dezvoltarea microbilor si toate componentele optice tratate anti-fungic.</p> <p>Sistem de control al intensitatii luminoase</p> <p>Modul de fluorescenta cu lampa de 50w.</p> <p>Suportul pentru 3 cuburi de fluorescenta sa fie dotat cu 2 cuburi dintre care: 1 cub cu bandpass 355/425 cu dicroica la 455 si filtru de supresie la 470 si cubul 2 cu bandpass 450/490 cu dicroica la 510 si filtru de supresie la 515.</p> <p>Tub binocular unghi de vizualizare maxim 30 grade cu oculare 10 X camp vizual 20 mm incluse</p> <p>Posibilitate de reglare distanta interpupilara intre 55 si 75mm</p> <p>Cap revolver pentru minim 4 obiective</p> <p>Obiective planachromate instalate:</p> <p>10x apertura minima 0.22, distanta de lucru 7.8mm;</p> <p>20x apertura minima 0.40 distanta de lucru 0.9 mm.</p> <p>40x apertura minima 0.65, distanta de lucru 0.36mm;</p> <p>100x, imersie ulei, apertura minima 1.25, distanta de lucru 0.10 mm;</p> <p>Masa microscop cu sistem de comanda a deplasarii xy pe partea dreapta, suport pentru 1 lama histologica, sistem de schimbare a lamei cu o singura mana</p> <p>Condensator abbe cu apertura minima 1.25 cu inaltime si diafragma de camp reglabila</p>	<p><b>Microscop Leica DM750 RH Cod: 13 613 010</b>, dotat cu:</p> <p>Stand ergonomic prevazut cu iluminare Led, durata de viata minim 25.000 ore de lucru la intensitate maxima cu asigurarea unei bune stabilitati si a max. de spatiu de lucru in jurul microscopului</p> <p>Maner de transport al microscopului si suport de infasurare al cablului de alimentare incorporat, pentru a facilita transportul si depozitarea microscopului.</p> <p>Stand acoperit cu vopsea speciala ce inhiba dezvoltarea microbilor si toate componentele optice tratate anti-fungic.</p> <p>Sistem de control al intensitatii luminoase</p> <p>Modul de fluorescenta “Illuminator LSF 4/20 3 Lbd.” cu lampa de 50w</p> <p>“Ultra-high-pressure Hg-lamp HG 50W”.</p> <p>Suportul pentru 3 cuburi de fluorescenta sa fie dotat cu 2 cuburi dintre care: 1 cub cu bandpass 355/425 cu dicroica la 455 si filtru de supresie la 470 “Filter system D S” si cubul 2 cu bandpass 450/490 cu dicroica la 510 si filtru de supresie la 515 “Filter system I3 S”.</p> <p>Tub binocular unghi de vizualizare 30 grade cu oculare 10 X camp vizual 20 mm incluse 30° Bino EZ Tube 10X/20</p> <p>Reglare distanta interpupilara intre 55 si 75mm</p> <p>Cap revolver pentru 4 obiective</p> <p>Obiective planachromate instalate:</p> <p>Obj. HI PLAN 10x/0.25, 10x apertura 0.22, distanta de lucru 7.8mm;</p> <p>Obj. HI PLAN 20x/0.40, 20x apertura 0.40, distanta de lucru 0.9 mm.</p> <p>Obj. HI PLAN 40x/0.65, 40x apertura 0.65, distanta de lucru 0.36mm;</p> <p>Obj. HI PLAN 100x/1.25 OIL, 100x, imersie ulei, apertura 1.25, distanta de lucru 0.10 mm;</p>

<p>Dotare cu camera foto dedicat microscopiei, integrata intre corpul si capul microscopului, fara a fi necesar cap trinocular.</p> <ol style="list-style-type: none"> <li>1. Camera foto dedicata microscopiei, cu software pentru masuratori si adnotari de baza cu urmatoarele caracteristici:</li> <li>2. Modul WiFi pentru conectare wireless la dispozitive mobile sau conectarea la WiFi-ul PC</li> <li>3. Posibilitatea de a lucra atat conectata la un monitor HD cat si conectata la un PC -Prevazuta cu slot pentru carduri SD cu capacitatea de pana la 32 Gb.</li> <li>4. Posibilitatea de conectare directa la rețea folosind cablu Ethernet</li> <li>5. Sisteme de operare compatibile: Win7, Win8, iOS7, iOS8 si Android</li> <li>6. Interfețe: USB2, HDMI, Ethernet</li> <li>7. Dimensiunea maximă a imaginii 5,0 Mpixel (2592 x 1944)</li> <li>8. Prevazuta cu buton pornit/oprit</li> <li>9. Prezazuta cu Led pentru indicarea statusului camerei</li> </ol> <p>Microscopul trebuie sa fie conform cerintelor RoHs</p> <p>Cerințe de certificare: Certificat CE sau declarație de conformitate CE cu anexele corespunzătoare pentru produsele oferite, valabil, copie confirmată prin semnatura și ștampila participantului. Termen de garanție: ≥36 luni</p> <p>Instalare, darea in exploatare, instruirea de către participantul câștigător-obligatoriu Training pentru utilizatori la instalare și la solicitare-obligatoriu.</p> <p>Servicii de mentenanță preventivă pe perioada de garanție.</p>	<p>Masa microscop cu sistem de comanda a deplasarii xy pe partea dreapta, suport pentru 1 lama histologica, sistem de schimbare a lamei cu o singura mana</p> <p>Condensor abbe cu apertura 1.25 cu inaltime si diafragma de camp reglabila</p> <p>Dotare cu camera foto dedicat microscopiei, integrata intre corpul si capul microscopului, fara a fi necesar cap trinocular.</p> <ol style="list-style-type: none"> <li>1. Camera foto Leica ICC50 W dedicata microscopiei, cu software pentru masuratori si adnotari de baza cu urmatoarele caracteristici:</li> <li>2. Modul WiFi pentru conectare wireless la dispozitive mobile sau conectarea la WiFi-ul PC</li> <li>3. Posibilitatea de a lucra atat conectata la un monitor HD cat si conectata la un PC -Prevazuta cu slot pentru carduri SD cu capacitatea de pana la 32 Gb.</li> <li>4. Posibilitatea de conectare directa la rețea folosind cablu Ethernet</li> <li>5. Sisteme de operare compatibile: Win7, Win8, Win 10, Win 11, iOS7 – iOS15 si Android</li> <li>6. Interfețe: USB2, HDMI, Ethernet</li> <li>7. Dimensiunea maximă a imaginii 5,0 Mpixel (2592 x 1944)</li> <li>8. Prevazuta cu buton pornit/oprit</li> <li>9. Prezazuta cu Led pentru indicarea statusului camerei.</li> <li>10. <b>SUPERIOR</b> Distributia luminii 50 oculare /50 camera</li> <li>11. <b>SUPERIOR</b> Dotat cu husa de protecție</li> </ol> <p>Microscopul e conform cerintelor RoHs</p> <p>Cerințe de certificare: Certificat CE sau declarație de conformitate CE cu anexele corespunzătoare pentru produsele oferite, valabil, copie confirmată prin semnatura și ștampila participantului. Termen de garanție: 36 luni</p> <p>Instalarea, darea in exploatare, instruirea de către participantul câștigător-obligatoriu Training pentru utilizatori la instalare și la solicitare-obligatoriu.</p> <p>Servicii de mentenanță preventivă pe perioada de garanție.</p>
---	--

**Declaration of Conformity  
Konformitätserklärung  
Déclaration de Conformité**



We / Wir / Nous

**Leica Microsystems (Schweiz) AG**  
Industry Division  
Max Schmidheiny-Strasse 201  
CH-9435 Heerbrugg

**declare under our sole responsibility that the product**  
erklären in alleiniger Verantwortung, dass das Produkt  
déclarons sous notre seule responsabilité que le produit

**13 613 010 Leica DM750 RH Tisch Std.Bel., 4fach Obj.rev.**

**To which this declaration relates is in conformity with the following standards**  
Auf das sich diese Erklärung bezieht, mit den folgenden Normen übereinstimmt  
Auquel se réfère cette déclaration est conforme aux normes

**EN 61010-1:2010  
EN 62471:2008  
EN 61326-1:2013  
EN 61000-3-3:2013  
EN 55011:2016  
EN 50581:2012**

**Following the provisions of directive(s)**  
gemäss den Bestimmungen der Richtlinie(n)  
conformément aux dispositions de(s) directive(s)

**Electromagnetic compatibility 2014/30/EU  
Electrical equipment designed for use within certain voltage limits - 2014/35/EU  
Restriction of the use of certain hazardous substances in electrical and electronic equipment  
(RoHS) 2011/65/EU**

**Place, date, Ort, Datum/  
lieu, date**

Heerbrugg, July 14th, 2017

**Name and function/ Name und Funktion/ nom  
et fonction**

**Michael Stroehle**  
Leica Microsystems (Schweiz) AG  
Global Manager Regulatory/Quality engineering





Management Service

# CERTIFICATE

The Certification Body  
of TÜV SÜD Management Service GmbH

certifies that



**Leica Microsystems (Suzhou) Technology Co., Ltd.**  
Room 503, Building B2, Genwayl-Park  
88 Dongchang Road, Suzhou Industrial Park  
Jiangsu, P.R. China  
Post Code: 215028

has established and applies  
an Environmental Management System for

**Design and Development.**

An audit was performed, Order No. **707085374.**

Proof has been furnished that the requirements  
according to

**ISO 14001:2015**

are fulfilled.

The certificate is valid in conjunction  
with the main certificate from **2021-04-26** until **2024-04-14**

Certificate Registration No.: **12 104 55886/14 TMS**

*Paul Jock*

Head of Certification Body  
Munich, 2021-04-28



CERTIFICATE ◆ CERTIFICADO ◆ CERTIFIKAT ◆ 證書 ◆ CERTIFICATE ◆ CERTIFIKAT ◆

證書



Management Service

# CERTIFICATE

The Certification Body  
of TÜV SÜD Management Service GmbH

certifies that



**Leica Microsystems (Suzhou) Technology Co., Ltd.**

Room 503, Building B2, Genwayl-Park,  
88 Dongchang Road, Suzhou Industrial Park  
Jiangsu, P.R. China  
Post Code: 215028

Unified social credit code: 91320594MA1YWEMX2Y

has established and applies  
a Quality Management System for

**Design and Development.**

An audit was performed, Order No. **707085374**.

Proof has been furnished that the requirements  
according to

**ISO 9001:2015**

are fulfilled.

The certificate is valid in conjunction  
with the main certificate from **2020-06-24** until **2021-05-28**.

Certificate Registration No.: **12 100 55886/14 TMS**.



**COPIA CORESPUNDE  
ORIGINALULUI**

*E. Koller*

Product Compliance Management  
Munich, 2020-06-25



ZERTIFIKAT ◆ CERTIFICATE ◆ CERTIFICADO ◆ CERTIFICAT ◆ CERTIFIKAT ◆ 認證證書 ◆ CERTIFICATE ◆ ZERTIFIKAT

From Eye to Insight

**Leica**  
MICROSYSTEMS

Educational Compound Microscopes

# A NEW GENERATION'S CHOICE OF INNOVATIVE EDUCATIONAL MICROSCOPES

Leica DM500 & DM750



# MADE FOR FUTURE NOBEL PRIZE WINNERS

## Science Teaching Revitalized

The more time the instructor has to teach, the more students can learn. The Leica DM500 and Leica DM750 microscopes were specifically developed to revitalize science teaching and to achieve the goal of more hands-on time for Life Science courses. With many student-friendly features and high-quality construction, the Leica DM500 and Leica DM750 invigorate science learning and teach the next generation of scientists effectively and efficiently.

### SUPERB OPTICS

- › Based on the same optical platform as Leica Microsystems' research microscope line, students enjoy outstanding optical performance with full access to virtually all accessories from Leica's microscope product line.
- › NEW! 100× dry (no oil needed) objective provides very high resolution (N.A. 0.8) while eliminating the need for oil.

### EZLITE™

- › LED illumination provides cool, white light with a lifetime of over 20 years average use. There is no need to change lamps during lab time, and this saves the expense of replacement lamps as well.
- › The cost-savings pays for several microscopes over their lifetimes.

### SAFETSTAGE™

- › Microscope stage maintains its dimension, which eliminates the chance of injury from contact with a conventional stage rack.
- › Rounded edges are easy on the skin.

### EZSTORE™

- › Integrated vertical handle provides easy carrying and lifting when storing on high shelves; undercut on front of stand works in combination with the handle for safer, two-handed carrying.
- › Integrated cord wrap eliminates damage to microscope components from improper cord wrapping; vertical cord insertion prevents the cord from pulling partially out of the stand while in storage or in use.
- › The unique shape of the microscope stand protects controls from damage when microscopes are stored side-by-side.

### EZGUIDE™

- › Student friendly slide holder helps prevent slide chipping

### USB POWER CONNECTOR

- › Providing power to the Leica USB cameras is extremely easy. Simply connect the camera via the provided USB cable to the 5 V/1.5 A USB power connector on the rear of the Leica DM500 and Leica DM750 stand. This saves the cost of an external power supply for the camera plus reduces the complexity at the workstation.

### AGTREAT™

- › The possible contamination with germs from surfaces is of great concern, especially in educational environments. Leica Microsystems has integrated an additive to the material of all microscope touchpoints to inhibit the growth of bacteria. This helps prevent the spread of disease via the microscope surfaces and leads to a healthier laboratory environment.





ASPU  
UBLICA  
19 2019



# LEICA DM500 – SCIENCE TEACHING MADE EASY

The Leica DM500 is ideal for entry level Life Science courses. The microscope's stand provides "plug and play" capability. All students need to do is turn the power on, place the specimen slide on the stage, focus, and enjoy the view!



## READY TO WORK

- › Pre-centered, pre-focused Abbe condenser eliminates the need for adjustments

## EZTUBE™

- › Eyepieces integrated with the eyetubes prevents loss
- › Preset diopter adjustments eliminates the risk of incorrectly setting the diopters
- › Other viewing tubes are also available

## SAFER ROTATION

- › Captive thumbscrew for safer rotation of the EZTube™

## ALL IN ONE

- › Abbe Condenser with slot for phase contrast and darkfield sliders, including a 4 position phase slider, which offers brightfield and phase capabilities all in one slider

## PERFECT LIGHT

- › LED illumination designed to provide even lighting across the full field of view without adjustments

# LEICA DM750 – SCIENCE TEACHING FOR A NEW GENERATION

The Leica DM750 is designed specifically for the versatile needs of advanced Life Science courses and for professional training such as medical, veterinary, and dental schools.

## VERSATILE

- › Standard condenser for magnifications 4x – 100x
- › Phase turret condenser for brightfield and phase contrast
- › Flip top condenser for low magnifications
- › The Leica DM750 is available with a 4 position or 5 position nosepiece

## WEAR RESISTANT

- › Special stage finish offers additional protection from friction damage

## ENERGY SAVING



- › Time delay shutoff saves energy by automatically turning off the illumination after 2 hours of no use

## A+ FOCUS, CONTRAST & ILLUMINATION

- › Weighted focus knobs provide inertia and extremely accurate focus capability
- › Koehler field diaphragm available as an option for optimum illumination and contrast

## SHARED VIEWING MADE EASY

- › Variety of viewing tubes provides free rotation while securely fixed to the stand
- › Standard viewing tubes with eyepiece locking screws prevent loss of eyepieces



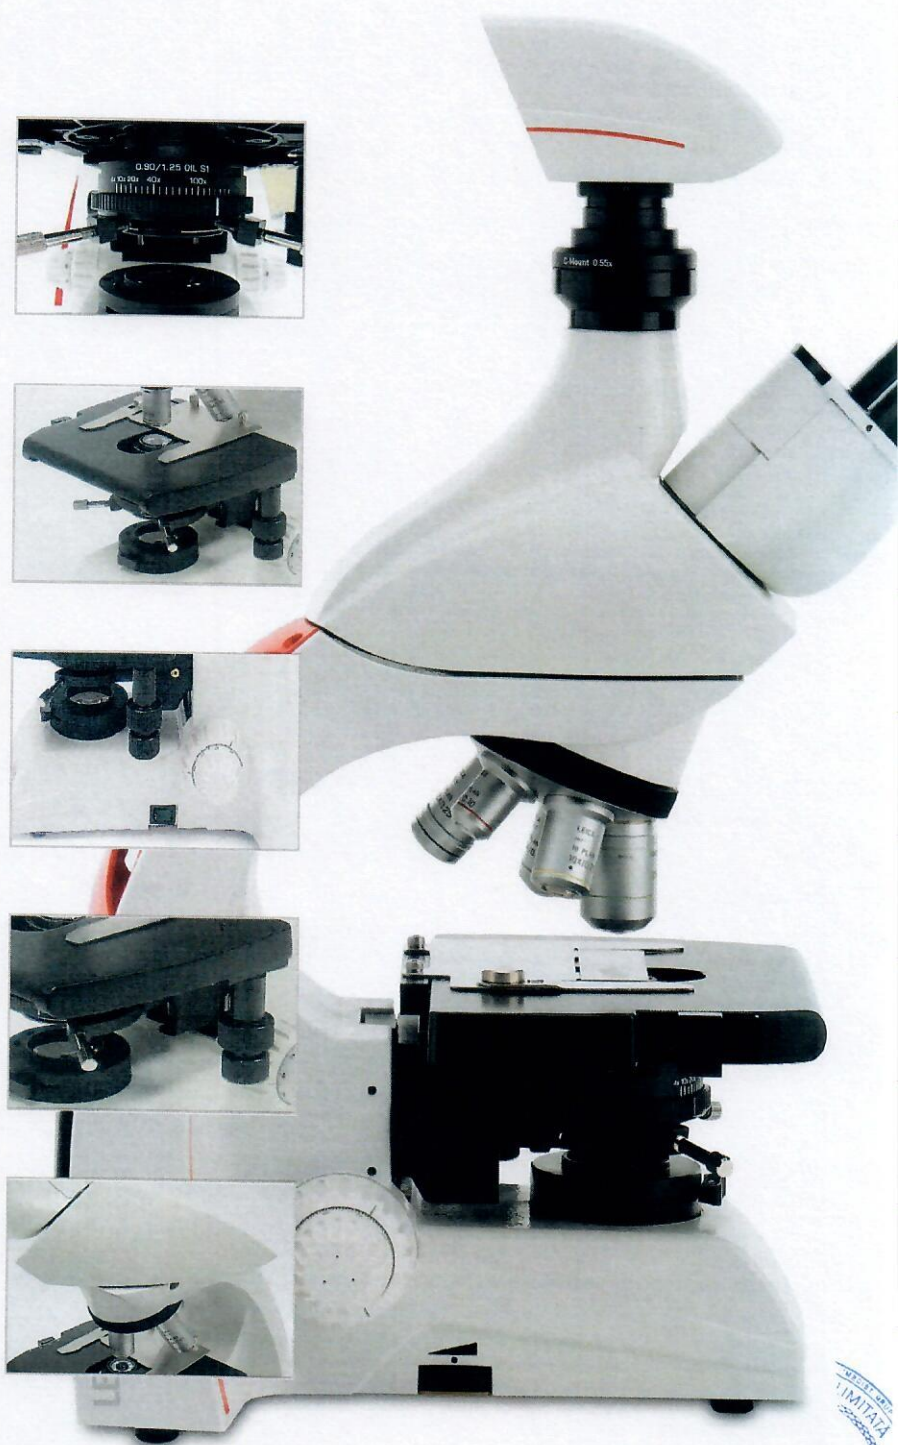
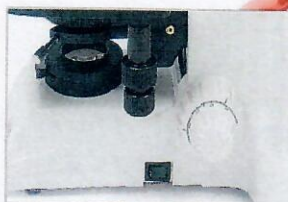


## GO WIRELESS!

The ability to share, capture, and archive images is an important part of the microscopy laboratory. The Leica DM500 and Leica DM750 are compatible with the full range of Leica Microsystems imaging solutions, allowing you to select the camera which best suits the demands of your classroom. Keep students on topic and maximize learning time with the NEW Leica ICC50 W/ E High Definition Wireless camera module.

### THE ICC50 W/ E CAMERA MODULE – INTEGRATED & MODULAR

- › In Ethernet mode, the connection to the camera is provided through your own network, allowing a maximum number of users to connect to the camera. To use this to full extent, all devices have to be on to same network as the microscope.
- › In USB mode you can connect your PC directly via USB cable to the camera, which is helpful when you aim for fastest live images e.g. of moving samples.
- › Computer users can use the Leica Imaging software to connect to the camera and work with the images. For PC use Leica Application Suite software, and use Leica Acquire for MAC.
- › Use lots of options with Leica AirLab App: It enables camera setup, annotations, measuring, image capture, and sharing to email, photo folders, or other social media connections.
- › Leica AirLab App is available free of charge for Android and iOS devices.
- › Stay flexible if there is no PC or mobile device around: Just capture images directly onto a memory card.
- › Fine-tune camera settings conveniently, capture images onto the SD card, and view the SD card gallery – all possible with the remote.
- › Project your images: Use the HDMI port for screen projections or output to HD screens.
- › You don't need any extra power cables: The camera is powered directly from the microscope stand with a USB cable.

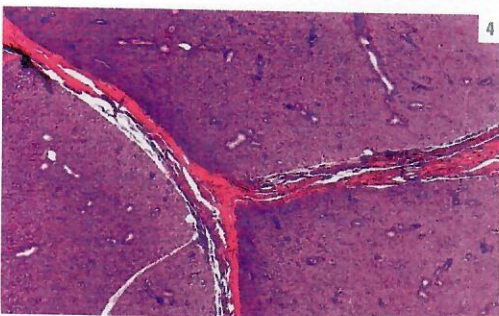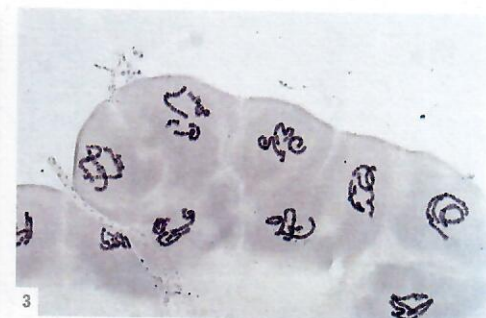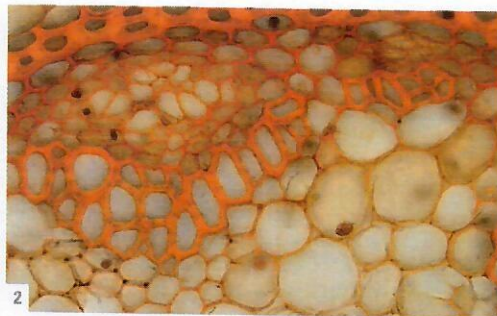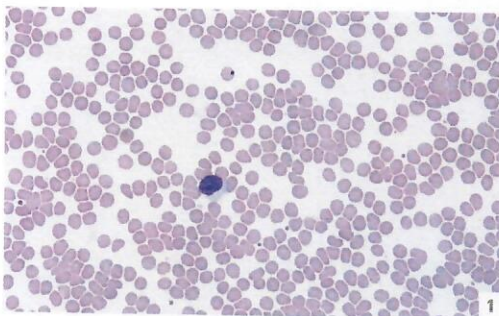




Students can connect to the Leica ICC50 W either through its own **internal Wi-Fi signal** using Wi-Fi mode or through the facilities' network using Ethernet mode.



The ICC50 E **exclusively** uses your facilities' **network (WLAN or LAN)** to allow students to connect to the camera. This is an ideal solution if you don't want to add additional Wi-Fi access points to your network.

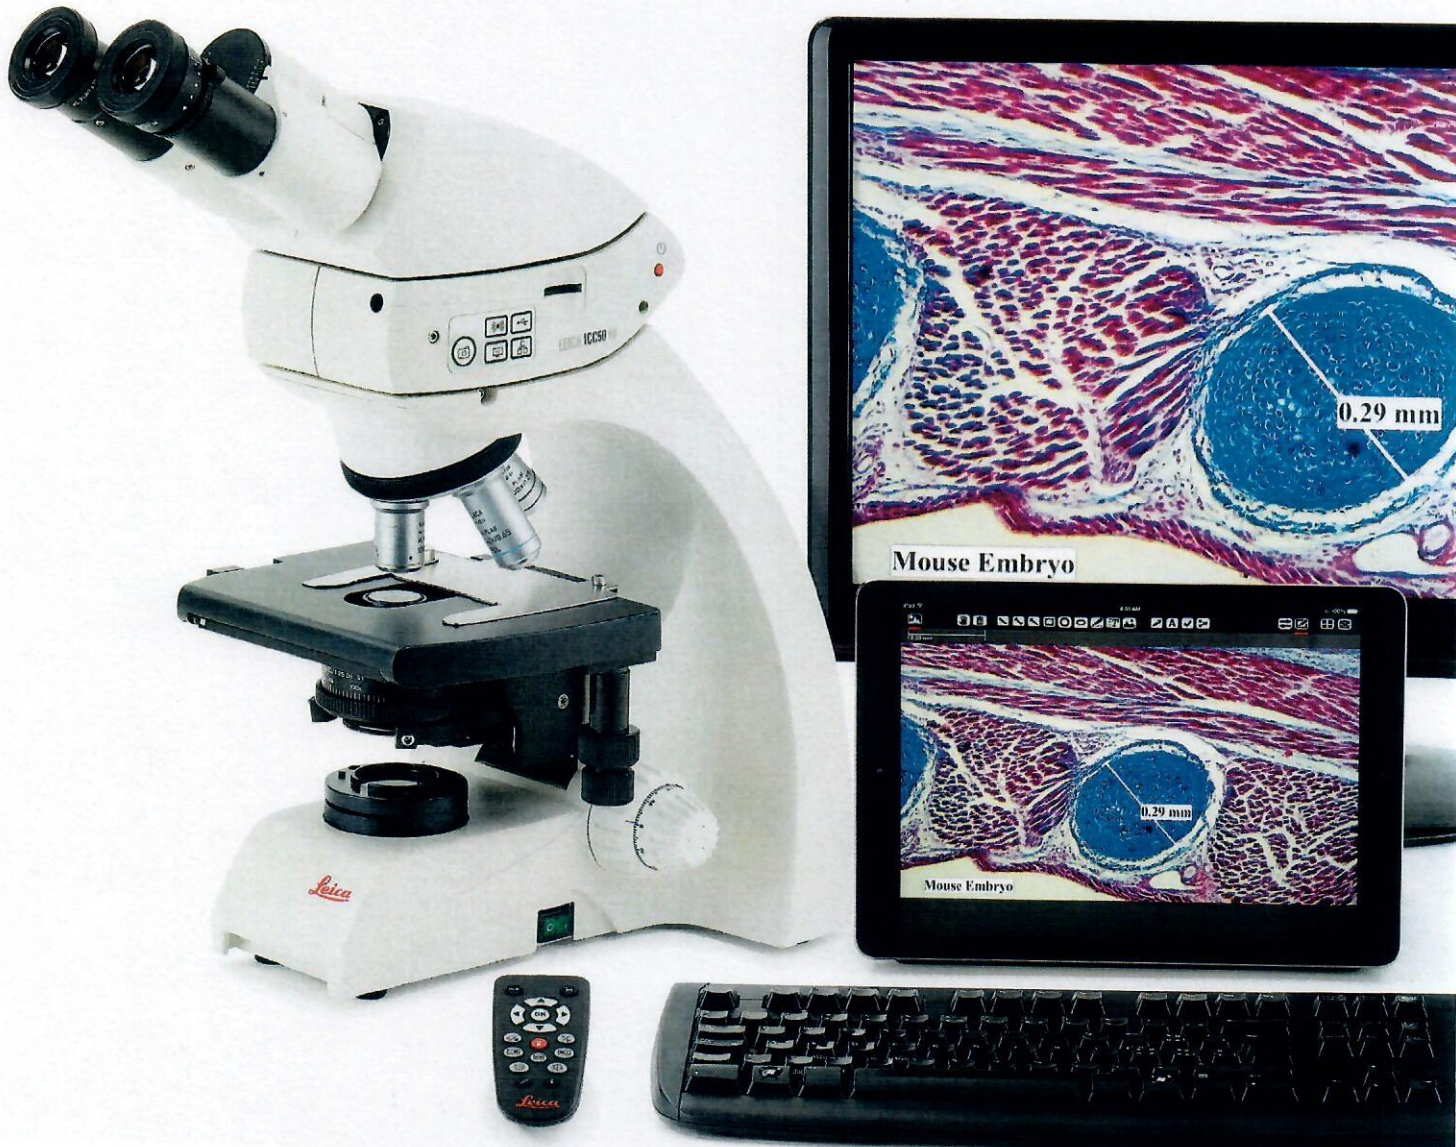


- 1: Human Blood
- 2: Convallaria – Lily of the Valley
- 3: Giant Chromosomes
- 4: Parotid Gland
- 5: Pine
- 6: Taste Buds

Leica DM750 with Leica ICC50 W digital microscope camera



# SYSTEM DIAGRAM

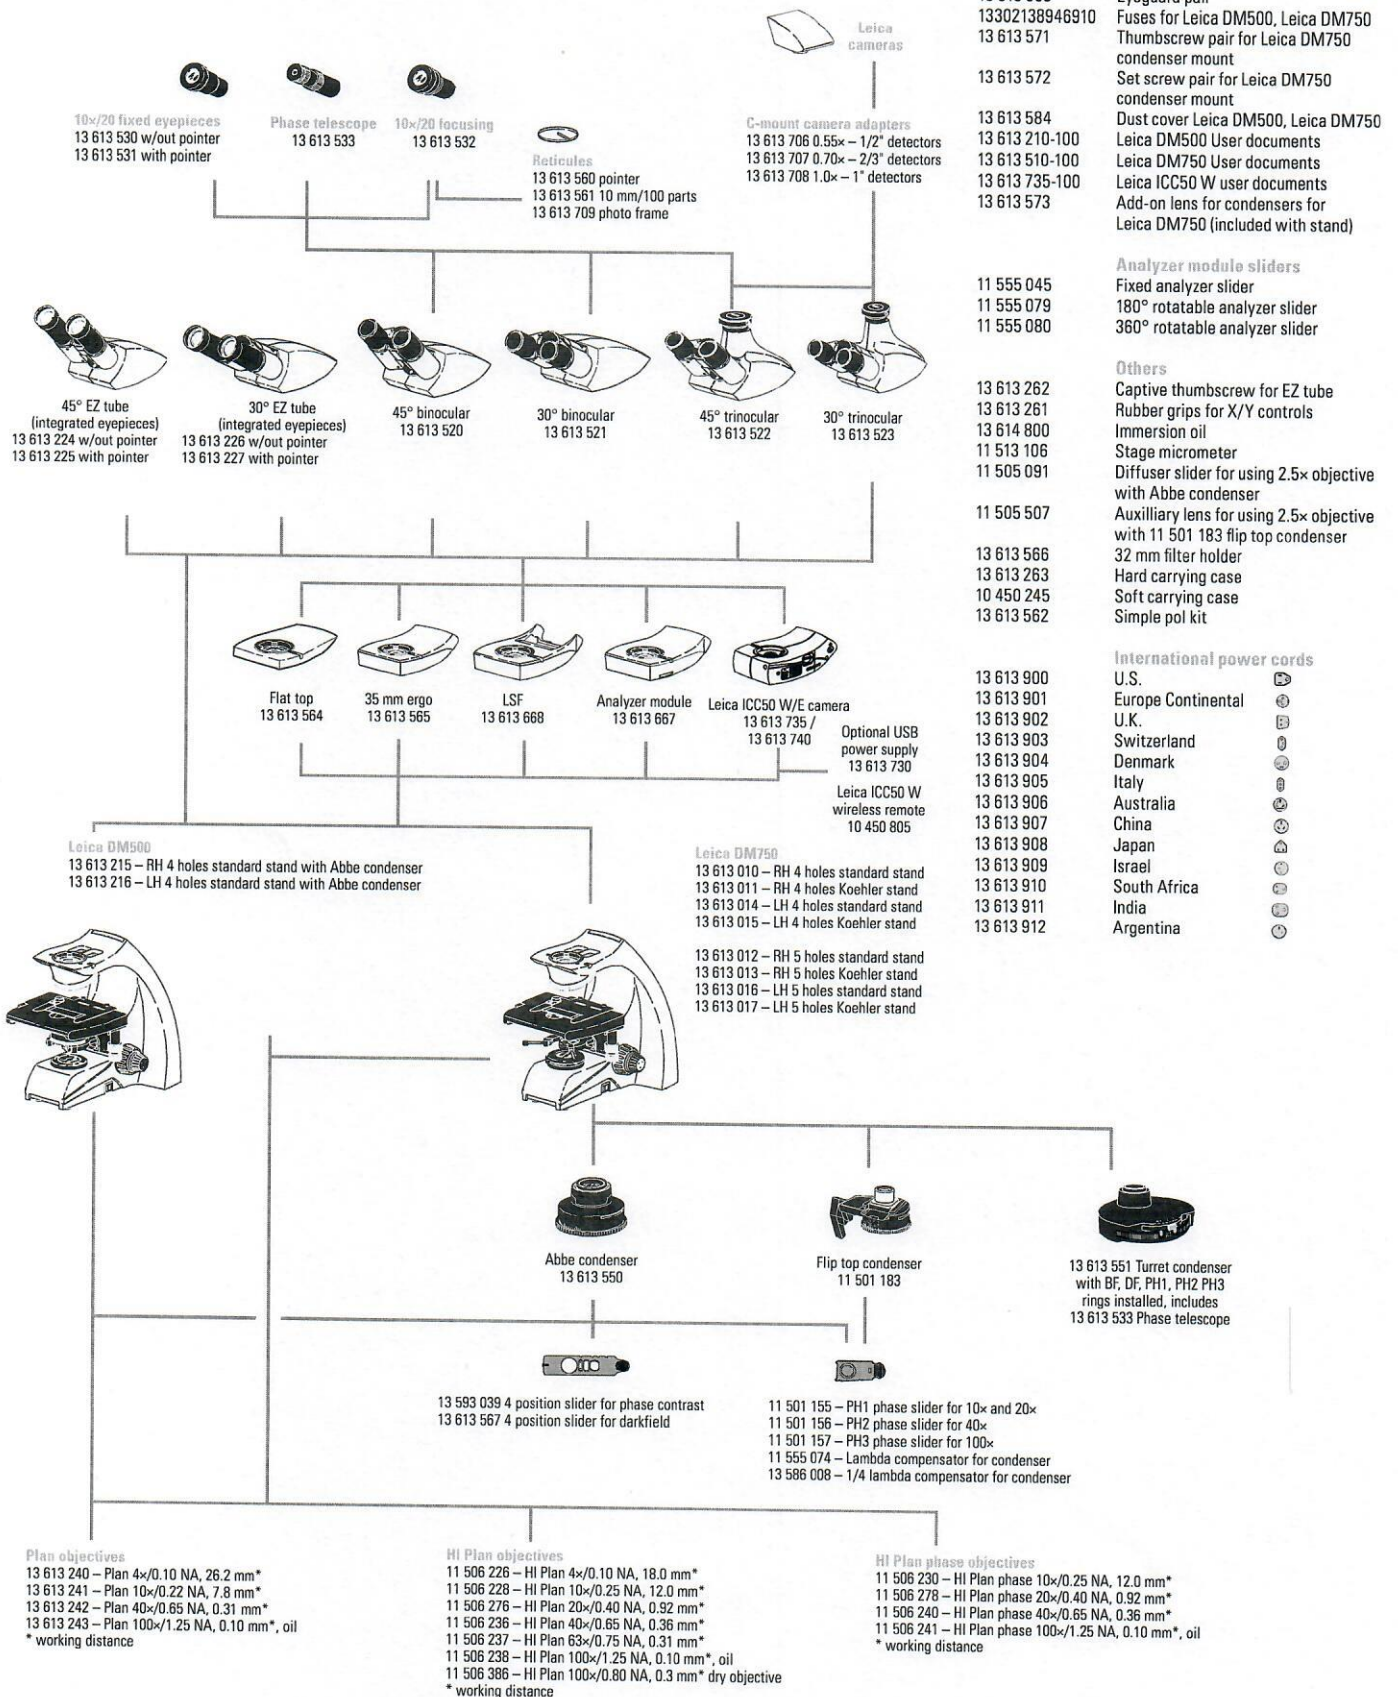


# PRECONFIGURED OUTFITS

OUTFIT ORDERING NUMBER	13 613 207	13 613 208	13 613 403	13 613 406	13 613 001	13 613 004	13 613 002	13 613 005
	DM500	DM500	DM750	DM750	DM750	DM750	DM750	DM750
<b>STANDS</b>								
13 613 215	DM500 RH Stand with Abbe condenser	X	X					
13 613 010	DM750 RH Stand			X	X	X		
13 613 011	DM750 RH Stand Koehler						X	X
<b>TUBES</b>								
13 613 224	45° EZ tube	X		X				
13 613 225	45° EZ tube with pointer		X		X			
13 613 520	45° binocular tube					X	X	X
<b>EYEPIECES</b>								
13 613 530	10×/20 eyepiece w/eyeguard					X	X	
13 613 531	10×/20 pointer eyepiece w/eyeguard						X	X
13 613 532	10×/20 focusing eyepiece w/eyeguard					X	X	X
<b>CONDENSERS</b>								
13 613 550	Abbe condenser 0.9 Dry/1.25 oil			X	X	X	X	X
<b>OBJECTIVES</b>								
13 613 240	Plan 4×/0.10 NA, 26.2 mm W.D.	X	X	X	X			
13 613 241	Plan 10×/0.22 NA, 7.8 mm W.D.	X	X	X	X			
13 613 242	Plan 40×/0.65 NA, 0.31 mm W.D.	X	X	X	X			
13 613 243	Plan 100×/1.25 NA, 0.10 mm W.D., oil	X	X	X	X			
11 506 226	HI Plan 4×/0.10 NA, 18.0 mm W.D.					X	X	X
11 506 228	HI Plan 10×/0.25 NA, 12.0 mm W.D.					X	X	X
11 506 236	HI Plan 40×/0.65 NA, 0.36 mm W.D.					X	X	X
11 506 238	HI Plan 100×/1.25 NA, 0.10 mm W.D., oil					X	X	X
13 614 800	Immersion oil	X	X	X	X	X	X	X

POWER CORD NOT INCLUDED: Must be ordered separately

# DIMENSIONS LEICA DM500 / DM750

Dimensions in mm/inch

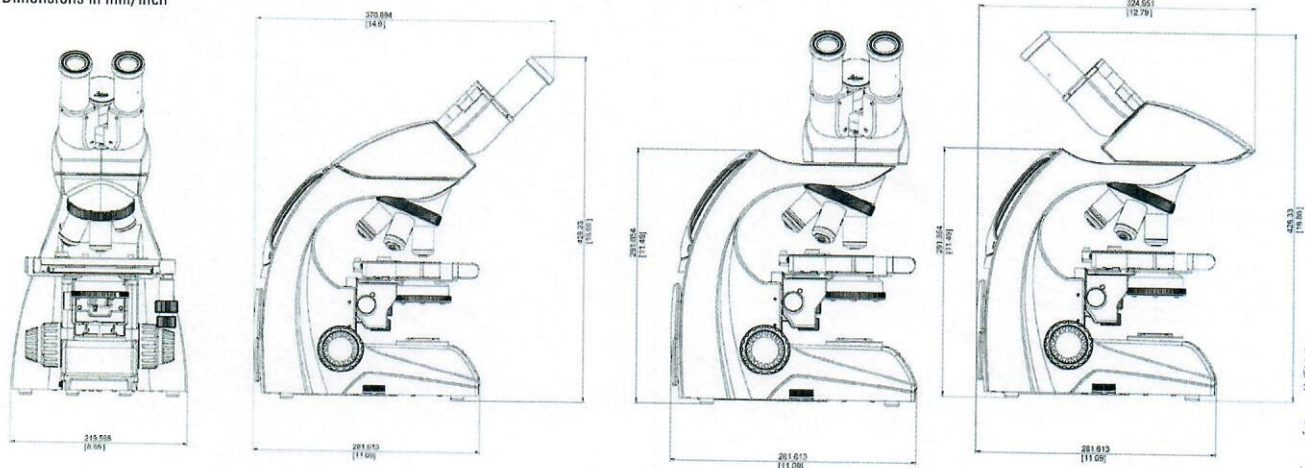

PUN  
R.I.  
D  
R  
101  
MOLI  
20

# SPECIFICATIONS LEICA DM500 / DM750

	DM500	DM750		DM500	DM750
<b>SEPARATE EYEPIECES</b>			<b>SAFETSTAGE™</b>		
High eyepoint	X	X	Stage surface 185 mm (150 mm front) wide × 140 mm deep	X	X
10×/20 (20 mm field of view)	X	X	Rounded stage edges	X	X
Available with or without pointer	X	X	Non extending rack	X	X
Available fixed or focusing	X	X	Verniers for X/Y coordinates	X	X
Focusing eyepieces with reticule holder for 24.5 mm reticle	X	X	Wear resistant stage surface	X	X
Foldable eyeguards	X	X			
30 mm mounting diameter	X	X	<b>CONDENSER</b>		
<b>EZTUBE™</b>			Prefocused and precentered Abbe condenser	X	
Preset diopters for corrected vision	X	X	Centerable and focusable condenser mount		X
45 degree viewing angle	X	X	Slot in Abbe condenser for contrast sliders (phase, darkfield, compensator)	X	X
10×/20 (20 mm field of view)	X	X	Magnification labels on condenser	X	X
Attaches to stand with set screw	X	X	Standard Leica condenser mount for condensers (Abbe, turret, flip top, etc.)		X
Captive thumbscrew available for safer rotation	X	X	<b>FOCUS</b>		
Eyepieces are integrated with tube	X	X	Low position focus controls	X	X
Available with pointer and without pointer	X	X	Self adjusting focus mechanism	X	X
Interpupillary distance range 52 mm – 75 mm	X	X	300 microns per fine focus rotation	X	X
<b>OTHER VIEWING TUBES FOR SEPARATE EYEPIECES</b>			Calibrated in 3 micron increments	X	X
45 degree, 30 degree, trinocular	X	X	Weighted focus knobs		X
Maximum field of view 20 mm	X	X	<b>EZLITE™</b>		
Rotatable dovetail	X	X	Preset field aperture only	X	
Leica tube dovetail standard	X	X	Available with or without adjustable Koehler field diaphragm		X
Eyepiece locking screw	X	X	LED Illumination – 6 000 K temp, 25 000 h life at full intensity	X	X
Interpupillary distance range 52 mm – 75 mm	X	X	Continuous intensity adjustment	X	X
<b>STAND</b>			Illumination sufficient for viewing at lowest intensity	X	X
Stand shape protects controls	X	X	Simple polarizing kit available	X	X
Stand construction – die-cast aluminium	X	X	2 hour Auto Off (can be disabled or enabled)		X
External fuses	X	X	Auto Off default: 4 hole stands enabled, 5 hole stands disabled		X
Knurled nosepiece	X	X	<b>IMAGING</b>		
4 position nosepiece only	X		Trinocular tubes available (50 %/50 % light split)	X	X
4 or 5 position nosepiece available		X	C-mount adapters with standard Leica mount	X	X
Drop in holder for 32 mm mounted or unmounted filters	X	X	Leica ICC50 W intermediate camera module (50 %/50 % light split)	X	X
5 V/1.5 A USB power supply to power camera	X	X	<b>INTERMEDIATE MODULES</b>		
<b>EZSTORE™</b>			35 mm intermediate ergo module available	X	X
Vertical handle	X	X	15 mm flat top module	X	X
Undercut in front of stand	X	X	Module for LSF reflected light illuminator	X	X
Cord wrap	X	X	Analyzer module	X	X
Vertical cord attachment to stand	X	X	<b>AGTREAT™</b>		
<b>OBJECTIVES</b>			Anti microbial treatment	X	X
Infinity optics platform	X	X	<b>CERTIFICATIONS</b>		
100× dry objective with N.A. 0.8 (no correction collar)	X	X	cULus, CE, RoHS	X	X
Objective labeling laser engraved (HI Plans)	X	X	Main optical components meet ISO 9022-11 for Mould Growth	X	X
M25 nosepiece thread	X	X	<b>SHIPPING</b>		
<b>EZGUIDE™</b>			Dimensions: 40 cm × 37 cm × 39 cm (H×D×W)	X	X
One-handed slide loading	X	X	Weight: 9 kg	X	X
26 mm × 76 mm stage travel	X	X			

# CLEAN AND GREEN



WE ACTIVELY IMPLEMENT WAYS TO MAKE OUR ENVIRONMENT  
CLEANER AND SAFER FOR THIS GENERATION AND THE NEXT

SEE MORE AT [WWW.LEICA-MICROSYSTEMS.COM/EDUCATION](http://WWW.LEICA-MICROSYSTEMS.COM/EDUCATION)

- › All packaging is completely recyclable
- › No lead content in any of the glass components
- › LED illumination consumes approximately 80 % less energy than standard halogen illumination
- › The time delay shut-off feature found on the Leica DM750 ensures no energy is wasted
- › Constantly optimizing our logistics chain keeps the CO<sub>2</sub> footprint as low as possible
- › AgTreat™ helps prevent the spread of disease via microscope surfaces and leads to a healthier laboratory environment
- › All products have been tested by independent safety laboratories and carry the cULus and CE mark to indicate their design for safety
- › All products are RoHs compliant, which means all electrical components meet restrictions on the use of hazardous substances
- › Interactive tour of the Leica DM500 and Leica DM750
- › Leica E-Series stereomicroscopes for low magnification inspection, dissecting, and image capture
- › Leica DM750 P Polarizing Microscope for Earth and Materials Science education
- › Leica DM750 M Microscope for Metallography
- › Selection of higher level microscopes for research
- › A selection of instructional booklets, which are free of charge



Leica Microsystems (Schweiz) AG · Max-Schmidheiny-Strasse 201 · 9435 Heerbrugg, Switzerland  
T +41 71 726 34 34 · F +41 71 726 34 44

[www.leica-microsystems.com](http://www.leica-microsystems.com)

CONNECT  
WITH US!

