


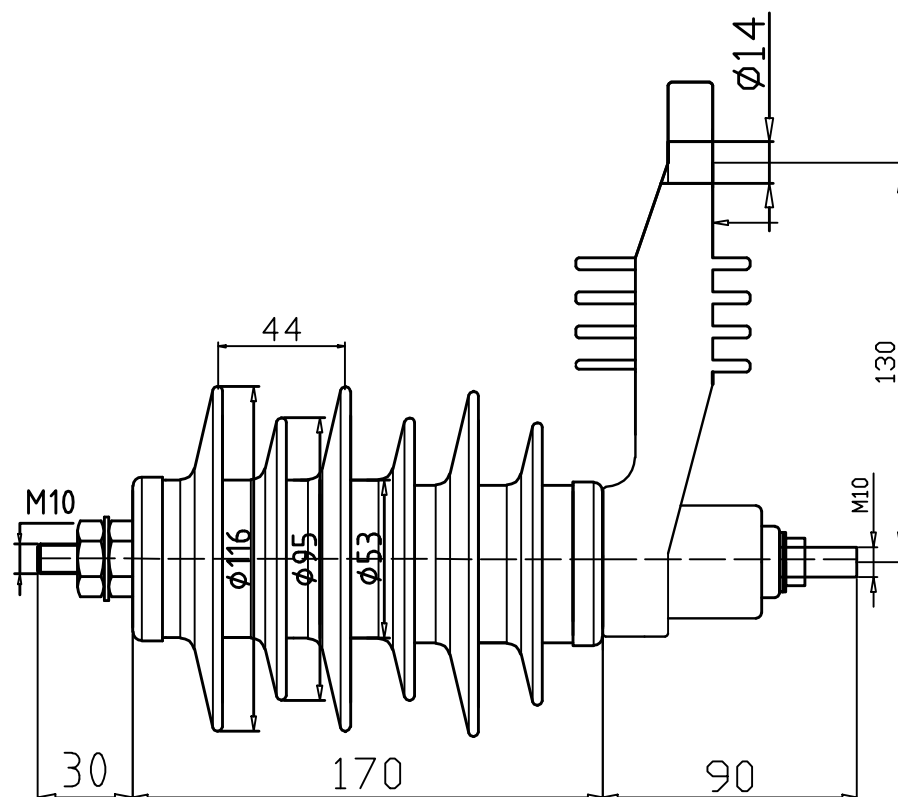

Service condition

- 1、Altitude:<2500m
- 2、Ambient air temperature: $-40\sim 40^{\circ}\text{C}$
- 3、System line class:1
- 4、Standard:IEC60099-4

Rated voltage (kv)	Nominal discharge current	MCOV (KV)	Residual voltage(kv)			Line class (A)	Long duration impulse current withstand(A)	4/10 μ s high current impulse(KA)	Creepage (mm)	Weight (Kg)	SURGE ARRESTER
			Steep current	switching surge	Lightning impulse						Type:HY10W-12L
12	10KA	10.2	42.2	27.0	36	I	250	100	425	1.5	