


BCS-P-NVR3204-A-4K(4)

Index: 11828
 GTIN13/EAN13: 5904890711006
 URL: <https://bcs.pl/gb/32-channel/3722-bcs-p-nvr3204-a-4k4-5904890711006.html>

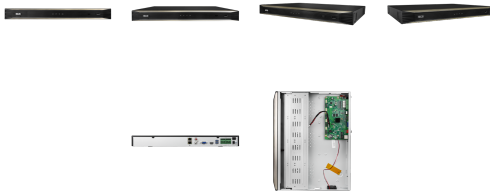

Product Details

Product	BCS-P-NVR3204-A-4K(4)
Brand	BCS POINT
NDAA	National Defense Authorization Act
System	IP
Pentaplex function	Live view / recording / playback / archiving / remote access
Channels	32
HDD support	4
HDD capacity	8 TB
ANR	Automatic synchronization of recordings from the camera's microSD card after the connection is lost and restored.
Max recording resolution	16 Mpx
Incoming bandwidth	320Mbps
Outgoing bandwidth	160Mbps
Display efficiency	H.265(30fps): 2×16M 2×12M 4×4K 6×5M 8×4M 10×3M 16×1080P 32×960P(25fps) H.264(30fps): 2×16M(4800×2688) 2×12M 2×4K 4×5M 6×4M 8×3M 14×1080P 28×960P(25fps) 30×720P 32×D1
Recording resolutions	16M / 12M / 8M / 6M / 5M / 4M / 3M / 2M / 960p / 720p / D1 / 2CIF / CIF
Video compression	H.265+ / H265 / H.264+ / H.264
HDMI out	HDMI4K
VGA out	VGA
HDMI display resolutions	3840×2160 / 1920×1080 / 1600×1200 / 1280×1024 / 1280×720 / 1024×768

VGA display resolutions	1920×1080 / 1600×1200 / 1280×1024 / 1280×720 / 1024×768
Display split	1/4/6/8/9/16/25/36 (3/4/5/7/9/10/12/16/32 corridor mode)
Synchronous playback	1/4/9/16
Archiving	Possibility to download material to external media such as USB FLASH, USB HDD
User connections	128
Interfaces	2×USB2.0, 1×USB3.0
Serial port	RS485
Audio in	1
Audio out	1
Audio compression	G.711A / G.711U
Alarm in	16
Alarm out	4
Support	Local, Web Service, CMS BCS Manager (Windows/Linux/MAC), Mobile App(iOS, android)
Network	2×RJ-45 10/100/1000Mbps
Compatibility	ONVIF(S/G/T), support third party cameras
Protocols	TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE, HTTP, HTTPS, DNS, DDNS, SNMP, SMTP
Power supply	12V DC
Power consumption (without HDD)	max 20W
Working environment	-10°C~+55°C max 90% RH
Casing	1U
Dimensions (W×D×H)	440×344×48mm
Weight (without HDD)	3 kg