



## 11 Specifications

- Operation panel

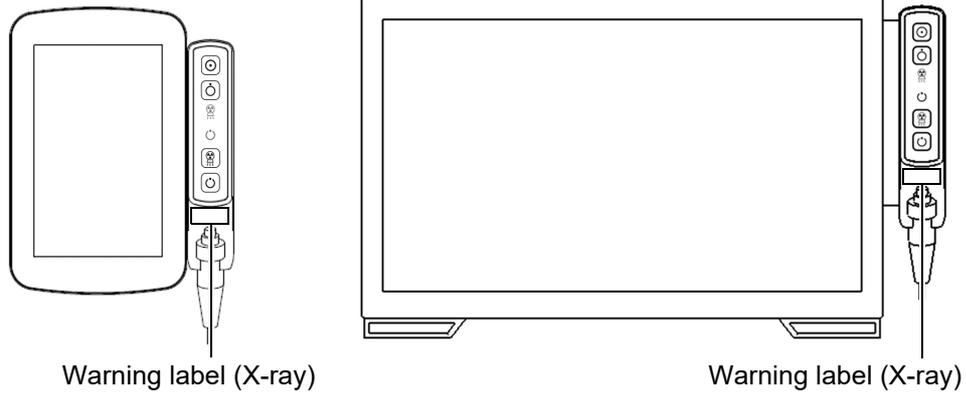

- Starter SA-60

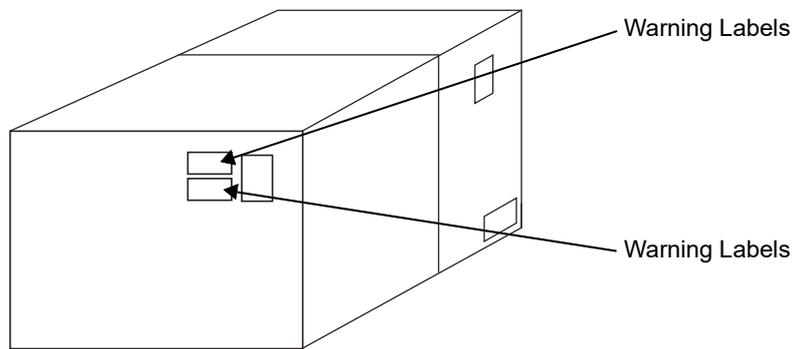

### ■ Name Plate (Cabinet) (Identification Label)

- D150BC-40

MODEL	D150BC-40		
PN / ID	562-23375-** / -----		
V, Hz, VA	3 ~ 200/220/240/380/400/415/440/480, 50/60, 120k		
RATED	125 kV, 12mA	CONTINUOUS	
	75 kV, 20mA		
	150 kV, 500mA	INSTANT	
	80 kV, 1000mA		
PROTECTION	CLASS I		
MANUFACTURED	-----	Made in Japan	⚠
565-10266-**			
株式会社 島津製作所 604-8511 京都市中京区西ノ京桑原町1 <b>SHIMADZU CORPORATION</b> 1, Nishinokyo-Kuwabaracho, Nakagyo-ku, Kyoto 604-8511, Japan			

- D150LC-40

MODEL	D150LC-40		
PN / ID	562-23375-** / -----		
V, Hz, VA	3 ~ 200/220/240/380/400/415/440/480, 50/60, 80k ~ 200/220/240, 50/60, 95k		
RATED	125 kV, 9mA	CONTINUOUS	
	150 kV, 320mA	INSTANT	
	80 kV, 630mA		
PROTECTION	CLASS I		
MANUFACTURED	-----	Made in Japan	⚠
565-10266-**			
株式会社 島津製作所 604-8511 京都市中京区西ノ京桑原町1 <b>SHIMADZU CORPORATION</b> 1, Nishinokyo-Kuwabaracho, Nakagyo-ku, Kyoto 604-8511, Japan			