


Neuron MAX 088

Soft Tip, 6F Long Sheath for Neurovascular Support


Distal flexibility – measuring tip softness

- 3x softer than Competitor A
- 9x softer than Competitor B

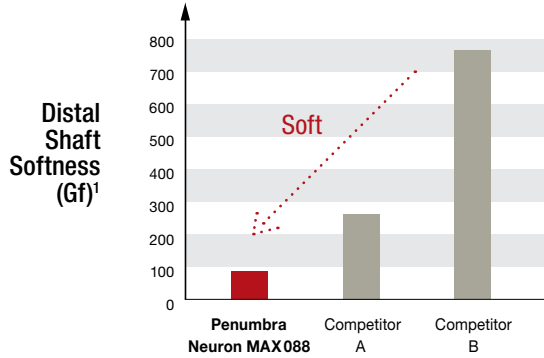

Optimal proximal support

- 75% more support than Competitor A

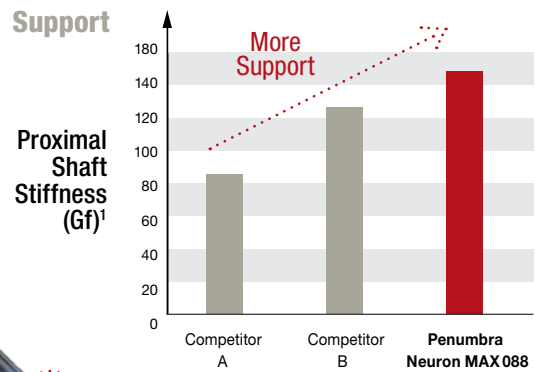

Largest lumen in class to deliver the widest range of devices

Penumbra Neuron MAX	Competitor A	Competitor B ²
.088"	.087"	.085"

Soft, beveled tip

PX SLIM

Compatible adjunctive device therapy

Penumbra Neuron MAX 088

- Prowler Select Plus
- XT-27
- Marksman
- Hyperform, Hyperglide, TransForm, Ascent, and Sceptre balloons

Penumbra 

1. At 50 mm gauge length via 5 mm compression at 10 mm/min rate


2. Based on measurements

Neuron **MAX 088** Soft Tip, 6F Long Sheath

- Full length stainless steel braid reinforced proximal support zone transitioning to 4 cm distal flexible zone with large .088" inner lumen
- Distal shaft has hydrophilic coating for optimal trackability
- Available in 80 cm and 90 cm lengths with Straight and Multipurpose (MP) tip shape

6F Select Catheter

1. Enables primary access and atraumatic placement into desired vessel without an over-the-wire exchange
2. Useful for diagnostic angiogram – .040" lumen
3. Stainless steel braided proximal shaft for support and torque response with a soft polymer distal shaft to enable atraumatic vessel selection

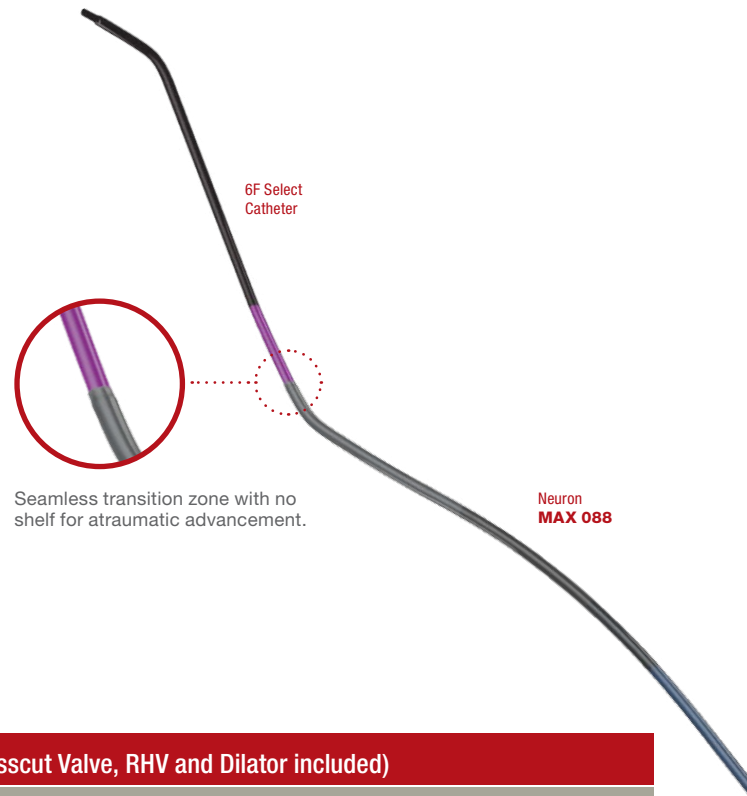

Ordering Information

Neuron **MAX 6F 088** Lumen Long Sheath (Crosscut Valve, RHV and Dilator included)

Catalog Number	Description	Tip Shape	Working Length	Distal Flexible Zone	Outer Diameter* Proximal / Distal	Inner Diameter	Wire Compatibility
PNML6F088804	6F 088 Neuron MAX Long Sheath, 80/4 Straight		80 cm	4 cm	8F / 8F	.088"	.035/.038"
PNML6F088804M	6F 088 Neuron MAX Long Sheath, 80/4 MP		80 cm	4 cm	8F / 8F	.088"	.035/.038"
PNML6F088904	6F 088 Neuron MAX Long Sheath, 90/4 Straight		90 cm	4 cm	8F / 8F	.088"	.035/.038"
PNML6F088904M	6F 088 Neuron MAX Long Sheath, 90/4 MP		90 cm	4 cm	8F / 8F	.088"	.035/.038"

6F Select Catheter

Catalog Number	Description	Tip Shape	Working Length	Distal Flexible Zone	Outer Diameter* Proximal / Distal	Inner Diameter	Wire Compatibility
PNS6F105BER	6F Select Catheter, 105 BER		105 cm	9 cm	5.6F / 6F / 5F	.040"	.035/.038"
PNS6F105H1	6F Select Catheter, 105 H1		105 cm	9 cm	5.6F / 6F / 5F	.040"	.035/.038"
PNS6F125BER	6F Select Catheter, 125 BER		125 cm	9 cm	5.6F / 6F / 5F	.040"	.035/.038"
PNS6F125SIM - NEW!	6F Select Catheter, 125 SIM	NEW!	125 cm	9 cm	5.6F / 6F / 5F	.040"	.035/.038"
PNS6F125H1	6F Select Catheter, 125 H1		125 cm	9 cm	5.6F / 6F / 5F	.040"	.035/.038"
PNS6F125SIMV	6F Select Catheter, 125 SIM-V		125 cm	9 cm	5.6F / 6F / 5F	.040"	.035/.038"

* A mid outer diameter is only listed if applicable to device.



www.penumbrainc.com

Penumbra, Inc. USA
One Penumbra Place
Alameda, CA 94502
USA
1.888.272.4606
T 1.510.748.3200
F 1.510.748.3232
order@penumbrainc.com
info@penumbrainc.com

Penumbra Europe GmbH
Am Borsigturm 44
13507 Berlin
Germany
T +49 30 2005 676-0
F +49 30 2005 676-10
order@penumbrainc.de
info@penumbrainc.de

Penumbra Neuro Australia Pty Ltd
Suite 3, Level 5, 1 Oxford Street
Darlinghurst NSW 2010
Australia
T +61-1300 817 025
F +61-1300 817 026
order.anz@penumbrainc.com