



BAMBAS
F R O S T

2022

COMMERCIAL REFRIGERATORS
& STAINLESS STEEL PRODUCTS







THE CORPORATION

The **BAMBAS FROST** corporation's activities are expanding in the manufacturing of professional refrigerators and stainless steel equipment area since 1998, in the Kozani main facilities, in the Western Macedonian region.

The company has been founded by **Mr. Konstantinos Vamvas**, a businessman with a long-time experience in the professional equipment industry. The company's human resources are experienced and highly qualified, with a solid know-how in professional equipment manufacturing areas. The BAMBAS FROST corporation is capable of satisfying any requirement of its customers. With the contribution of its selected collaborators, BAMBAS FROST handles the equipment of professional facilities such as restaurants, hotels, food service spaces, cafeterias, bakeries etc. in Greece and abroad as well. Its high-quality products comply with the European standards and certification requirements. Due to the perfect quality of its products, its prompt service, the development of innovative products and its participation in core international exhibitions abroad, the

BAMBAS FROST corporation has become widely famous in the professional equipment industry.

The human resources, the cutting-edge concepts, the ultra-modern CNC technology machinery along with the BAMBAS FROST know-how in the freezing area assure the complete structuring of professional spaces by means of reliable equipment. The high-quality equipment manufacturing, such as stainless steel professional refrigerators, food-service equipment such as glass baskets, working benches, ventilation pipes and various other similar items, has built up the company's high-level reputation in the domestic as well as the global market and has highlighted BAMBAS FROST as one of the best manufacturers of professional equipment in Greece.

BAMBAS FROST privately owned facilities include modern buildings of 11,000 square meters, located at the third kilometer of the Kozani-Thessaloniki national road, in the Kalsia industrial area.

The company's large warehouse enables it

QUALITY



BAMBAS FROST core principle and commitment as well as the philosophy of every company's manager consists in providing products and services which respond entirely to its customer requirements and expectations within the scheduled delivery deadlines, in complying with the legal and regulatory requirements of the products and achieving its own quality aims.

To achieve the above mentioned goals, **BAMBAS FROST**:

- Uses AISI 18/10 304 type stainless steel in all the equipment and refrigerators of its product range thus providing high-quality and reliable products
- All refrigerators and freezers have a tropical type operation mode (T) which can afford ambient temperatures of +43°C
- All electronic systems, the refrigerator motors and product components are manufactured by well-established brands acknowledged for their quality
- Its products are manufactured according to the CE complying statement
- Is ISO 9001 certified and applies this quality management system

- Checks and improves continuously its product features wherever it's possible
- Implements the incorporation of the most advanced technology whilst it strives to assure the efficiency of its production processes and consequently that of the entire quality management system, aiming to its continuous improvement
- Always allocates the required resources to assure the appropriate and efficient operation of every corporate department in order to consolidate its leading market position through a continuously developing product range
- Keeps its customers updated about the safe use and maintenance of its products and implements the required improvements on the basis of its customer feedback

By adopting the principle of continuous improvement, achieved through the collective contribution, involvement and updating, **BAMBAS FROST** uses its long-time experience and invests in its device quality, the respect of its customers and their entire satisfaction.





NEW REFRIGERANT R290 GAS

Our first concern is to produce products that meet the international standards and they follow the new trends and technology requirements.

We redesigned our products to provide in market improved refrigerant units, which is ecological friendly and customized in new technologies. To achieve these goals, we have moved on some changes one of them is to use the new refrigerant R290.

The advantages of a refrigerant unit that uses refrigerant R290 are the following:

- Reduced energy consumption
- Higher efficiency of the cooling circuit
- Reduced device sound
- Higher energy class



ENLARGED INSULATION FOR LESS CONSUMPTION

Beside the change of the refrigerant gas, a very significant factor for the energy saving is the thickness of the insulation. Having this under consideration, we enlarged the thickness of the insulation for the cabinets, both refrigerators and freezers, 7cm thickness on the body and 8cm on the bottom. Always using new technology insulation materials, that are friendly to the environment.



NEW TEMPERATURE CONTROLLER

In cooperation with the Italian house DIXELL, we have created a new electronic temperature controller, which provides the latest technological innovations of DIXELL such as:

- Waterproof panel IP67
- Night function for energy saving
- Pioneering design and bigger digital display.
- Special covering plate for humidity protection

Furthermore, the electronic temperature controller comes with an easy changing button for fast replacement without expertise knowledge.



EVAPORATOR WITH ANTICORROSIVE PROTECTION

All the cooling appliances are equipped with evaporators that are covered with a special paint with anti-corrosive protection. This means that we achieve longer lifespan and endurance in hard work conditions, such as storage of food in high salt content, dairy and cheese products.



NEW INNOVATIVE COOLING SYSTEM, SMART COOL WITH THREE ZONES

With the new cooling system SMART COOL the temperature is evenly distributing even if the external temperature is high. The new cooling system in combination with the renewed evaporator provides uniform temperature and the airflow is distributed in three levels in the cabinet. With this functional cooling system, the temperature deviations are insignificant.



The manufacturer reserves the right to make changes on design, specification, terms and conditions governing new products, sales, and prices. This catalogue cancels all previous and prices are Ex-works and delivery costs are not included. Prices are subject to alteration at any time without notice or obligation. While every effort is made to ensure accuracy, no responsibility can be accepted by BAMBAS FROST or any of its Authorized Agents for errors, omissions or alterations.





INDEX

	Page
CABINETS	12 - 44
COUNTER REFRIGERATORS	45 - 72
DISPLAY REFRIGERATORS / HEATED BAIN MARIE	73 - 90
LUX LINE.....	91 - 100
CORIAN FROST SERIES.....	101 - 112
STAINLESS STEEL PRODUCTS	113 - 146
GASTRONORM CONTAINERS	147
BASINS	148
CONSUMABLES	149 - 150



CABINETS

- ▶ REFRIGERATED / FREEZER.....12-25
- ▶ WITH GLASS DOOR.....26-31
- ▶ UNDER MOUNTED UNIT GLASS DOOR.....32-38
- ▶ WITH SLIDING GLASS DOORS 39-40
- ▶ UPRIGHT REFRIGERATED DISPLAY.....41-42
- ▶ EXTRAS43

REFRIGERATED / FREEZER CABINET

SLIM LINE

US 50



50cm

INOX
304

L

7 cm

LED



7cm insulation



Air flow system



Removable door
gaskets

- Stainless steel 304 Exterior / Interior
- Insulation with ecological polyurethane 7cm the body and 8cm on the bottom
- H.A.C.C.P. rounded corners
- Plastic – coated grills
- Stainless steel pair sheet for Gastronorm Containers
- Self- closing door
- Terminal switch which blocks the ventilator when the door opens
- Ecological Freon
- Air flow system for uniform distribution of cooling

EXTRAS
US 50
UK 50



GASTRONORM CONTAINERS



SUPPORT PAIRS - GN / SHELF



GRILLS



DOOR LOCK



WHEELS



INOX
304



7 cm



US 50 - UK 50



Optional drawers

Drawer guides are made of stainless steel AISI 304 and have durability of 60kg

DRAWER

MODEL	SC1
Dimensions (WxDxH) cm.	31 x 54,3 x 26

- Stainless steel 304 Exterior / Interior
- Insulation with ecological polyurethane 7cm the body and 8cm on the bottom
- H.A.C.C.P. rounded corners
- Optional gastro drawer installation
- Plastic – coated grills
- Stainless steel pair sheet for Gastronorm Containers
- Self- closing door
- Terminal switch which blocks the ventilator the door opens
- Ecological Freon
- Air flow system for uniform distribution of cooling

MODEL	US 50	UK 50
External dimensions (WxDxH) cm.	50 x 72 x 207	50 x 72 x 207
Capacity (L)	314	314
Temperature Range (°C)	0 to +10	0 to -20
Doors	1	1
Door Dimensions (WxD) cm.	49 x 167	49 x 167
Plastic-coated grills (Pcs/Dimensions (WxD) cm.)	3 / 33 x 53,5	3 / 33 x 53,5
Inox Feet (Pcs/Dimensions (H) cm.)	4 / 10 -13	4 / 10 -13
Voltage / Frequency (V/Hz)	220 - 240 / 50	220 - 240 / 50
Input Power (W)	450	650
Compressor (HP)	3/8	1/2
Type of Cooling	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic
Controller	Digital	Digital
Refrigerant	R 290	R 290
Internal Light	LED	X
Net Weight (kg)	105	116
Volume (m³)	0,74	0,74

REFRIGERATED CABINET

WITH 1 DOOR

US 70



INOX
304

L

7 cm

LED



7cm insulation



Air flow system



Removable door gaskets

- Stainless steel Exterior / Interior
- Insulation with ecological polyurethane 7cm to the body and 8cm on the bottom
- H.A.C.C.P. rounded corners
- Plastic-coated grills
- Stainless steel pair sheet for gastronorm containers
- Height adjustable inox feet
- Self-closing doors, terminal switch which blocks the ventilator when the door opens
- Ecological freon
- Air flow system for uniform distribution of cooling

EXTRAS
US 70
UK 70



GASTRONORM CONTAINERS



SUPPORT PAIRS - GN / SHELF



GRILLS



DOOR LOCK



WHEELS



FREEZER CABINET
WITH 1 DOOR

UK 70



INOX
304



7 cm

- Stainless steel Exterior / Interior
- Insulation with ecological polyurethane 7cm to the body and 8cm on the bottom
- H.A.C.C.P. rounded corners
- Plastic-coated grills
- Stainless steel pair sheet for gastronorm containers
- Height adjustable inox feet
- Self-closing doors, terminal switch which blocks the ventilator when the door opens
- Ecological freon
- Air flow system for uniform distribution of cooling

MODEL	US 70	UK 70
External dimensions (WxDxH) cm.	70 x 82 x 207	70 x 82 x 207
Capacity (L)	620	620
Temperature Range (°C)	-1 to +10	0 to -20
Doors	1	1
Door Dimensions (WxD) cm.	69 x 167,5	69 x 167,5
Plastic-coated grills (Pcs/Dimensions (WxD) cm.)	3 / 55 x 63	3 / 55 x 63
Inox Feet (Pcs/Dimensions (H) cm.)	4 / 10 -13	4 / 10 -13
Voltage / Frequency (V/Hz)	220 - 240 / 50	220 - 240 / 50
Input Power (W)	450	650
Compressor (HP)	3/8	1/2
Type of Cooling	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic
Controller	Digital	Digital
Refrigerant	R 290	R 290
Internal Light	LED	X
Net Weight (kg)	115	127
Volume (m³)	1,18	1,18

REFRIGERATED CABINET

FOR TRAYS 40x60 cm.

UST 70



INOX
304

L

7 cm

LED



7cm insulation



Door terminal switch



Removable door gaskets

- Stainless steel Exterior / Interior
- Insulation with ecological polyurethane 7cm
- H.A.C.C.P. rounded corners
- Stainless steel construction for trays 40x60cm
- Height adjustable inox feet

- Self-closing doors, terminal switch which blocks the ventilator when the door opens
- Ecological freon
- Air flow system for uniform distribution of cooling

EXTRAS
UST 70
UKT 70



SUPPORT PAIRS FOR TRAYS



WHEELS



DOOR LOCK



UKT 70



INOX
304



7 cm



- Stainless steel Exterior / Interior
- Insulation with ecological polyurethane 7cm to the body and 8cm on the bottom
- H.A.C.C.P. rounded corners
- Plastic-coated grills
- Stainless steel pair sheet for gastronorm containers
- Height adjustable inox feet
- Self-closing doors, terminal switch which blocks the ventilator when the door opens
- Ecological freon
- Air flow system for uniform distribution of cooling

MODEL	UST 70	UKT 70
External dimensions (WxDxH) cm.	70 x 82 x 207	70 x 82 x 207
Capacity (L)	600	600
Temperature Range (°C)	-1 to +10	0 to -20
Doors	1	1
Door Dimensions (WxD) cm.	69 x 167,5	69 x 167,5
Tray dimensions (Pcs/Dimensions (WxD) cm.)	17 / 40 x 60	17 / 40 x 60
Inox Feet (Pcs/Dimensions (H) cm.)	4 / 10 -13	4 / 10 -13
Voltage / Frequency (V/Hz)	220 - 240 / 50	220 - 240 / 50
Input Power (W)	450	650
Compressor (HP)	3/8	1/2
Type of Cooling	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic
Controller	Digital	Digital
Refrigerant	R 290	R 290
Internal Light	LED	-
Net Weight (kg)	115	127
Volume (m³)	1,18	1,18

Prices do not include support pairs and trays

REFRIGERATED AND FREEZER CABINET

USK 70

INOX
304

L

7 cm

LED



- Stainless steel Exterior / Interior
- Insulation with ecological polyurethane 7cm
- H.A.C.C.P. rounded corners
- Plastic-coated grills
- Stainless steel pair sheet for gastronorm containers
- Height adjustable inox feet
- Self-closing doors, terminal switch which blocks the ventilator when the door opens
- Ecological freon
- Air flow system for uniform distribution of cooling

EXTRAS
USK 70
USKS 70



GASTRONORM CONTAINERS



SUPPORT PAIRS - GN / SHELF



GRILLS



DOOR LOCK



WHEELS

USKS 70



HOST 2015
**SMART
LABEL**

AWARDED WITH
SMART LABEL

REFRIGERATED AND FREEZER CABINET

The refrigerator / freezer cabinet USKS70 awarded by italy POLIS DESIGN organization with the SMART LABEL award. Due to advanced technology and the low energy consumption, this product is an innovative and environmentally friendly proper for professional use.

MODEL	USK 70	USKS 70
External dimensions (WxDxH) cm.	70 x 82 x 207	70 x 82 x 207
Capacity (L)	320 / 280	320 / 280
Temperature Range (°C)	0 to +10 / -15 to -20	0 to +10 / -15 to -20
Doors / Drawers	2 / -	1 / 2
Door Dimensions (WxD) cm.	69 x 90 / 69 x 81	69 x 90 / Drawers
Plastic-coated grills (Pcs/Dimensions (WxD) cm.)	4 / 55 x 63	4 / 55 x 63
Inox Feet (Pcs/Dimensions (H) cm.)	4 / 10 - 13	4 / 10 - 13
Voltage / Frequency (V/Hz)	220 - 240 / 50	220 - 240 / 50
Input Power (W)	650	650
Compressor (HP)	1/2	1/2
Type of Cooling	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic
Controller	Digital	Digital
Refrigerant	R 290	R 290
Internal Light	LED	LED
Net Weight (kg)	137	153
Volume (m³)	1,18	1,18

ROLL-IN

ROLL 90

INOX
304

7 cm



7cm insulation



Door terminal switch



Removable door gaskets

- Stainless steel Exterior / Interior
- Insulation with ecological polyurethane 7cm
- Internal wall protection
- Bottom with ramp for tray trolley
- Self-closing doors, terminal switch which blocks the ventilator when the door opens
- Ecological freon
- Air flow system for uniform distribution of cooling

EXTRAS
ROLL 90



CONTAINER TRAY TROLLEY (Page 125)



ROLL-IN

ROLL 90



MODEL

ROLL 90

External dimensions (WxDxH) cm.

90 x 90 x 238

Internal dimensions (WxDxH) cm.

76 x 76 x 185

Capacity (L)

1068

Temperature Range (°C)

+3 to +10

Doors

1

Door Dimensions (WxD) cm.

89 x 209

Voltage / Frequency (V/Hz)

220 - 240 / 50

Input Power (W)

650

Compressor (HP)

1/2

Type of Cooling

Fan assisted

Type of Defrost

Automatic

Controller

Digital

Refrigerant

R 290

Internal Light

LED

Net Weight (kg)

165

Volume (m³)

1,9

REFRIGERATED CABINET

WITH 2 DOORS



US 137



INOX
304

L

7 cm

LED



7cm insulation



Gastronorm containers and grills



Meat hooks



H.A.C.C.P. rounded corners

- Stainless steel Exterior / Interior
- Insulation with ecological polyurethane 7cm to the body and 8cm on the bottom
- H.A.C.C.P. rounded corners
- Plastic-coated grills
- Stainless steel pair sheet for gastronorm containers
- Height adjustable inox feet
- Self-closing doors, terminal switch which blocks the ventilator when the door opens
- Ecological freon
- Base for double meat hooks
- Air flow system for uniform distribution of cooling

EXTRAS
US 137
UK 137



GASTRONORM CONTAINERS



SUPPORT PAIRS - GN / SHELF



GRILLS



DOOR LOCK



WHEELS





FREEZER CABINET
WITH 2 DOORS

INOX
304



UK 137



- Stainless steel Exterior / Interior
- Insulation with ecological polyurethane 7cm to the body and 8cm on the bottom
- H.A.C.C.P. rounded corners
- Plastic-coated grills
- Stainless steel pair sheet for gastronorm containers
- Height adjustable inox feet
- Self-closing doors, terminal switch which blocks the ventilator when the door opens
- Ecological freon
- Air flow system for uniform distribution of cooling

MODEL	US 137	UK 137
External dimensions (WxDxH) cm.	137 x 82 x 207	137 x 82 x 207
Capacity (L)	1232	1232
Temperature Range (°C)	-1 to +10	0 to -20
Doors	2	2
Door Dimensions (WxD) cm.	67 x 167,5	67 x 167,5
Plastic-coated grills (Pcs/Dimensions (WxD) cm.)	6 / 60,5 x 60,5	6 / 60,5 x 60,5
Inox Feet (Pcs/Dimensions (H) cm.)	4 / 10 -13	4 / 10 -13
Voltage / Frequency (V/Hz)	220 - 240 / 50	220 - 240 / 50
Input Power (W)	650	850
Compressor (HP)	1/2	3/4
Type of Cooling	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic
Controller	Digital	Digital
Refrigerant	R 290	R 290
Internal Light	LED	-
Net Weight (kg)	185	200
Volume (m³)	2,32	2,32

REFRIGERATED CABINET

WITH 3 DOORS



US 205



INOX
304



7 cm



7cm insulation



Door terminal switch



Removable door gaskets



Gastronorm containers and grills

- Stainless steel Exterior / Interior
- Insulation with ecological polyurethane 7cm to the body and 8cm on the bottom
- H.A.C.C.P. rounded corners
- Plastic-coated grills
- Stainless steel pair sheet for gastronorm containers
- Height adjustable Inox feet
- Self-closing doors, terminal switch which blocks the ventilator when the door opens
- Ecological Freon
- Air flow system for uniform distribution of cooling

EXTRAS
US 205
UK 205



GASTRONORM CONTAINERS



SUPPORT PAIRS - GN / SHELF



GRILLS



DOOR LOCK



WHEELS





FREEZER CABINET
WITH 3 DOORS

INOX
304



UK 205



- Stainless steel Exterior / Interior
- Insulation with ecological polyurethane 7cm to the body and 8cm on the bottom
- H.A.C.C.P. rounded corners
- Plastic-coated grills
- Stainless steel pair sheet for gastronorm containers
- Height adjustable inox feet
- Self-closing doors, terminal switch which blocks the ventilator when the door opens
- Ecological freon
- Air flow system for uniform distribution of cooling

MODEL	US 205	UK 205
External dimensions (WxDxH) cm.	205 x 82 x 207	205 x 82 x 207
Capacity (L)	1900	1900
Temperature Range (°C)	-1 to +10	0 to -20
Doors	3	3
Door Dimensions (WxD) cm.	67 x 167,5	67 x 167,5
Plastic-coated grills (Pcs/Dimensions (WxD) cm.)	6 / 60,5X60,5-3/68X60	6 / 60,5X60,5-3/68X60
Inox Feet (Pcs/Dimensions (H) cm.)	6 / 10 -13	6 / 10 -13
Voltage / Frequency (V/Hz)	220 - 240 / 50	220 - 240 / 50
Input Power (W)	900	950
Compressor (HP)	3/4	3/4
Type of Cooling	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic
Controller	Digital	Digital
Refrigerant	R 290	R 290
Internal Light	LED	-
Net Weight (kg)	220	247
Volume (m³)	3,47	3,47

DRY AGE CABINET

DR 70



INOX
304

L

7 cm

LED

- Stainless steel 304 Exterior / Interior
- Insulation with ecological polyurethane 7cm the body and 8cm on the bottom
- H.A.C.P. rounded corners
- Stainless steel grills
- Stainless steel pair sheet for Gastronorm Containers
- Height adjustable inox feet
- Self-closing door
- Terminal switch which blocks the ventilator when the door opens
- Lock on the door
- Drain system on the bottom
- LED internal light
- Humidity control
- UV protection double glass
- UVC antibacterial lamp
- Bluetooth connectivity
- H.A.C.P. data recorder
- Three meat hook tubes
- Ecological Freon
- Air flow system for uniform distribution of cooling and best air circulation

Require connection in water supply.

EXTRAS
DR 70



GASTRONORM CONTAINERS



SUPPORT PAIRS - GN / SHELF



GRILLS



DOOR LOCK



WHEELS



DR 70



DRY AGE

Dry Aged meat cabinets have the proper conditions to mature meat, the air humidity, air circulation and temperature are controlled.

This process provides to meat intense and deep flavor and a grate smooth texture where has nothing to do with the raw meat.

The meat is done tender because of the natural enzymes which they "separate" the protein cells where contained in muscle tissue.

The difference between raw meat and dry aged meat is that the second one is noticeably tender and tasty than the raw meat.

To achieve the best aged meat more than the regular, a piece of meat in "dry environment" needs space (many liters of air round the meat), in a space that the temperature and humidity are observed all the time.

MODEL	DR 70
External dimensions (WxDxH) cm.	70 x 82 x 207
Capacity (L)	600
Temperature Range (°C)	-2 to +15
Humidity (%)	30 έως 90
Doors	1
Door Dimensions (WxD) cm.	69 x 167,5
Inox grills (Pcs/Dimensions (WxD) cm.)	3 / 55 x63
Inox Feet (Pcs/Dimensions (H) cm.)	4 / 10 - 13
Voltage / Frequency (V/Hz)	220 - 240 / 50
Input Power (W)	1150
Compressor (HP)	1/2
Type of Cooling	Fan assisted
Type of Defrost	Automatic
Controller	Digital
Refrigerant	R 290
Internal Light	LED
Antibacterial lamp	UVC
Net Weight (kg)	134
Volume (m³)	1,18

DRY AGE CABINET BLACK

DR 70 BL

INOX
304

7 cm



- Black color steel Exterior / Interior
- Insulation with ecological polyurethane 7cm the body and 8cm on the bottom
- H.A.C.C.P. rounded corners
- Stainless steel grills
- Stainless steel pair sheet for Gastronorm Containers
- Height adjustable inox feet
- Self- closing door
- Terminal switch which blocks the ventilator when the door opens
- Lock on the door
- Drain system on the bottom
- LED internal light
- Humidity control
- UV protection double glass
- UVC antibacterial lamp
- Bluetooth connectivity
- H.A.C.C.P. data recorder
- Three meat hook tubes
- Ecological Freon
- Air flow system for uniform distribution of cooling and best air circulation

Require connection in water supply.

EXTRAS
DR 70



GASTRONORM CONTAINERS



SUPPORT PAIRS - GN / SHELF



GRILLS



DOOR LOCK



WHEELS



DR 70 BL



DRY AGE

Dry Aged meat cabinets have the proper conditions to mature meat, the air humidity, air circulation and temperature are controlled.

This process provides to meat intense and deep flavor and a grate smooth texture where has nothing to do with the raw meat.

The meat is done tender because of the natural enzymes which they "separate" the protein cells where contained in muscle tissue.

The difference between raw meat and dry aged meat is that the second one is noticeably tender and tasty than the raw meat.

To achieve the best aged meat more than the regular, a piece of meat in "dry environment" needs space (many liters of air round the meat), in a space that the temperature and humidity are observed all the time.

MODEL	DR 70 BL
External dimensions (WxDxH) cm.	70 x 82 x 207
Capacity (L)	600
Temperature Range (°C)	-2 to +15
Humidity (%)	30 έως 90
Doors	1
Door Dimensions (WxD) cm.	69 x 167,5
Inox grills (Pcs/Dimensions (WxD) cm.)	3 / 55 x63
Inox Feet (Pcs/Dimensions (H) cm.)	4 / 10 - 13
Voltage / Frequency (V/Hz)	220 - 240 / 50
Input Power (W)	1150
Compressor (HP)	1/2
Type of Cooling	Fan assisted
Type of Defrost	Automatic
Controller	Digital
Refrigerant	R 290
Internal Light	LED
Antibacterial lamp	UVC
Net Weight (kg)	134
Volume (m³)	1,18

REFRIGERATED / FREEZER CABINET WITH GLASS DOOR

UB 70



INOX
304



7 cm



7cm insulation



Wheels



Inox handle details

- Stainless steel Exterior / Interior
- Insulation with ecological polyurethane 7cm to the body and 8cm on the bottom
- H.A.C.C.P. rounded corners
- Double glasses in the refrigerator and triple heated glasses in the freezer
- Plastic-coated grills
- Height adjustable Inox feet
- Self-closing doors, terminal switch which blocks the ventilator when the door opens
- Ecological Freon

EXTRAS

UB 70, UBF 70
UK 137, UBF 137



GASTRONORM CONTAINERS



SUPPORT PAIRS - GN / SHELF



GRILLS



DOOR LOCK



WHEELS

REFRIGERATED / FREEZER CABINET WITH GLASS DOOR

INOX
304



7 cm

LED

UB 137



- Stainless steel Exterior / Interior
- Insulation with ecological polyurethane 7cm to the body and 8cm on the bottom
- H.A.C.C.P. rounded corners
- Double glasses in the refrigerator and triple heated glasses in the freezer
- Plastic-coated grills
- Height adjustable inox feet
- Self-closing doors, terminal switch which blocks the ventilator when the door opens
- Ecological freon

MODEL	UB 70	UBF 70	UB 137	UBF 137
External dimensions (WxDxH) cm.	70 x 82 x 207	70 x 82 x 207	137 x 82 x 207	137 x 82 x 207
Capacity (L)	620	620	1232	1232
Temperature Range (°C)	0 to +10	0 to -18	0 to +10	0 to -18
Doors	1	1	2	2
Door Dimensions (WxD) cm.	69 x 167,5	69 x 167,5	67 x 167,5	67 x 167,5
Plastic-coated grills (Pcs/Dimensions (WxD) cm.)	4 / 55 x 63	4 / 55 x 63	8 / 60,5 x 60,5	8 / 60,5 x 60,5
Inox Feet (Pcs/Dimensions (H) cm.)	4 / 10 -13	4 / 10 -13	4 / 10 -13	4 / 10 -13
Voltage / Frequency (V/Hz)	220 - 240 / 50	220 - 240 / 50	220 - 240 / 50	220 - 240 / 50
Input Power (W)	450	650	650	850
Compressor (HP)	3/8	1/2	1/2	3/4
Type of Cooling	Fan assisted	Fan assisted	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic	Automatic	Automatic
Controller	Digital	Digital	Digital	Digital
Refrigerant	R 290	R 290	R 290	R 290
Internal Light	LED	LED	LED	LED
Net Weight (kg)	125	148	200	223
Volume (m³)	1,18	1,18	2,32	2,32

UNDER MOUNTED BLACK COLOR REFRIGERATED / FREEZER CABINET
WITH GLASS DOORS

**INOX
304**



7 cm



UP 69 BL



Black color steel Exterior / Interior
Stainless steel bottom
Insulation with ecological polyurethane 7cm to the body and 8cm on the bottom
Double glasses in the refrigerator and triple heated glasses in the freezer

Plastic coated grills
wheels
Self - closing doors, terminal switch which blocks the ventilator when the door opens
Ecological freon
Air flow system for uniform distribution of cooling

MODEL	UP 69 BL	UPF 69 BL
External dimensions (WxDxH) cm.	69 x 72 x 200	69 x 72 x 200
Capacity (L)	480	480
Temperature Range (°C)	0 to +10	0 to -18
Doors	1	1
Door dimensions (WxD) cm.	66 x 147	66 x 147
Plastic- coated grills (Pcs/Dimensions(WxD) cm.)	4 / 53 x 50	4 / 53 x 50
Inox feet (Pcs./Dimensions(H) cm.)	2 / 4 / 2,5	2 / 4 / 2,5
Voltage / Frequency (V/Hz)	220 - 240 / 50	220 - 240 / 50
Input power (W)	450	650
Compressor (HP)	3/8	1/2
Type of Cooling	Fan assisted	Fan assisted
Type of defrost	Automatic	Automatic
Controller	Digital	Digital
Refrigerant	R 290	R 290
Internal Light	LED	LED
Net Weight (kg)	122	145
Volume (m³)	0,98	0,98

UNDER MOUNTED BLACK COLOR REFRIGERATED / FREEZER CABINET
WITH GLASS DOORS

**INOX
304**



7 cm



UP 137 BL



Black color steel Exterior / Interior
Stainless steel bottom
Insulation with ecological polyurethane 7cm to the body and 8cm on the bottom
Double glasses in the refrigerator and triple heated glasses in the freezer

Plastic coated grills
wheels
Self - closing doors, terminal switch which blocks the ventilator when the door opens
Ecological freon
Air flow system for uniform distribution of cooling

MODEL	UP 137 BL	UPF 137 BL
External dimensions (WxDxH) cm.	137x 72 x 200	137 x 72 x 200
Capacity (L)	1080	1080
Temperature Range (°C)	0 to +10	0 to -18
Doors	1	1
Door dimensions (WxD) cm.	66 x 147	66 x 147
Plastic- coated grills (Pcs/Dimensions(WxD) cm.)	8 / 60,5 x 51	8 / 60,5 x 51
Inox feet (Pcs./Dimensions(H) cm.)	3 / 4 / 2,5	3 / 4 / 2,5
Voltage / Frequency (V/Hz)	220 - 240 / 50	220 - 240 / 50
Input power (W)	650	850
Compressor (HP)	1/2	3/4
Type of Cooling	Fan assisted	Fan assisted
Type of defrost	Automatic	Automatic
Controller	Digital	Digital
Refrigerant	R 290	R 290
Internal Light	LED	LED
Net Weight (kg)	195	205
Volume (m³)	0,98	0,98

UNDER MOUNTED BLACK COLOR REFRIGERATED CABINET

WITH 3 GLASS DOORS

**INOX
304**



7 cm

UP 205 BL



Black color steel Exterior / Interior

Stainless steel bottom

Insulation with ecological polyurethane 7cm to the body and 8cm on the bottom

H.A.C.C.P. rounded corners

Double glasses

Plastic -coated grills

wheels

Self- closing doors, terminal switch which blocks the ventilator when the door opens

Ecological freon

Air flow system for uniform distribution of cooling

MODEL	UP 205 BL
External dimensions (WxDxH) cm.	205 x 72 x 200
Capacity (L)	1671
Temperature Range (°C)	0 to +10
Doors	3
Door Dimensions (WxD) cm.	67,5 x 144
Plastic-coated grills (Pcs./Dimensions (WxD) cm.)	12 / 51 x 60,5- 4/ 67 x 51
Inox feet/Wheels (Pcs./Dimensions(H) cm.)	6 / 3 - 3,5
Voltage / Frequency (V/Hz)	220 - 240 / 50
Input Power (W)	900
Compressor (HP)	3/4
Type of Cooling	Fan assisted
Type of Defrost	Automatic
Controller	Digital
Refrigerant	R 290
Internal Light	LED
Net Weight (kg)	240
Volume (m ³)	2,99

UNDER MOUNTED WHITE COLOR REFRIGERATED / FREEZER CABINET WITH GLASS DOOR

UP 69



7cm insulation



Door terminal switch

- White color steel Exterior / Interior
- Stainless steel bottom
- Insulation with ecological polyurethane 7cm to the body and 8cm on the bottom
- H.A.C.C.P. rounded corners
- Double glasses in the refrigerator and triple heated glasses in the freezer
- Plastic-coated grills
- Height adjustable inox feet & wheels
- Self-closing doors, terminal switch which blocks the ventilator when the door opens
- Ecological freon
- Air flow system for uniform distribution of cooling

EXTRAS

UP 69, UPF 69
UF 137, UPF 137



GRILLS



DOOR LOCK

UNDER MOUNTED WHITE COLOR REFRIGERATED / FREEZER CABINET WITH GLASS DOOR



UP 137



- White color steel Exterior / Interior
- Stainless steel bottom
- Insulation with ecological polyurethane 7cm to the body and 8cm on the bottom
- H.A.C.C.P. rounded corners
- Double glasses in the refrigerator and triple heated glasses in the freezer
- Plastic-coated grills
- Height adjustable inox feet & wheels
- Self-closing doors, terminal switch which blocks the ventilator when the door opens
- Ecological freon
- Air flow system for uniform distribution of cooling

MODEL	UP 69	UPF 69	UP 137	UPF 137
External dimensions (WxDxH) cm.	69 x 72 x 200	69 x 72 x 200	137 x 72 x 200	137 x 72 x 200
Capacity (L)	480	480	1080	1080
Temperature Range (°C)	0 to +10	0 to -18	0 to +10	0 to -18
Doors	1	1	2	2
Door Dimensions (WxD) cm.	66 x 147	66 x 147	66 x 147	66 x 147
Plastic-coated grills (Pcs/Dimensions (WxD) cm.)	4 / 53 x 50	4 / 53 x 50	8 / 60,5 x 51	8 / 60,5 x 51
Inox feet / Wheels (Pcs/ Pcs/ Dim. (H) cm.)	2 / 4 / 2,5	2 / 4 / 2,5	3 / 4 / 2,5	3 / 4 / 2,5
Voltage / Frequency (V/Hz)	220 - 240 / 50	220 - 240 / 50	220 - 240 / 50	220 - 240 / 50
Input Power (W)	450	650	650	850
Compressor (HP)	3/8	1/2	1/2	3/4
Type of Cooling	Fan assisted	Fan assisted	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic	Automatic	Automatic
Controller	Digital	Digital	Digital	Digital
Refrigerant	R 290	R 290	R 290	R 290
Internal Light	LED	LED	LED	LED
Net Weight (kg)	122	145	195	205
Volume (m³)	0,98	0,98	1,89	1,89

UNDER MOUNTED WHITE COLOR REFRIGERATED CABINET WITH 3 GLASS DOOR

UP 205



7cm insulation



Door terminal switch



Double glass door

- White color steel Exterior / Interior
- Stainless steel bottom
- Insulation with ecological polyurethane 7cm to the body and 8cm on the bottom
- H.A.C.C.P. rounded corners
- Double glasses
- Plastic-coated grills
- Height adjustable inox feet & wheels
- Self-closing doors, terminal switch which blocks the ventilator when the door opens
- Ecological freon
- Air flow system for uniform distribution of cooling

EXTRAS
UP 205



GRILLS



DOOR LOCK



UNDER MOUNTED WHITE COLOR REFRIGERATED CABINET WITH 3 GLASS DOOR



Optional: Stainless steel shelves for grocery baskets

MODEL	UP 205
External dimensions (WxDxH) cm.	205 x 72 x 200
Capacity (L)	1671
Temperature Range (°C)	0 to +10
Doors	3
Door Dimensions (WxD) cm.	67,5 x 144
Plastic-coated grills (Pcs/Dimensions (WxD) cm.)	12 / 51 x 60,5- 4/ 67 x 51
Inox feet / Wheels (Pcs/ Pcs/ Dim. (H) cm.)	6 / 3 - 3,5
Voltage / Frequency (V/Hz)	220 - 240 / 50
Input Power (W)	900
Compressor (HP)	3/4
Type of Cooling	Fan assisted
Type of Defrost	Automatic
Controller	Digital
Refrigerant	R 290
Internal Light	LED
Net Weight (kg)	240
Volume (m³)	2,99

UNDER MOUNTED REFRIGERATED CABINET WITH SLIDING GLASS DOORS

UBS 137



INOX
304



7 cm



Sliding glass door

- Stainless steel Exterior / Interior
- Insulation with ecological polyurethane 7cm to the body and 8cm on the bottom
- H.A.C.C.P. rounded corners
- Double glasses
- Plastic-coated grills
- Height adjustable inox feet & wheels
- Self-closing sliding doors
- Ecological freon

EXTRAS
UBS 137
UBP 137



GRILLS



UNDER MOUNTED WHITE REFRIGERATED CABINET WITH SLIDING GLASS DOORS



**INOX
304**



**7
cm**



UBP 137



- White color steel Exterior / Interior
- Stainless steel bottom
- Insulation with ecological polyurethane 7cm to the body and 8cm on the bottom
- H.A.C.C.P. rounded corners
- Double glasses
- Plastic-coated grills
- Height adjustable inox feet & wheels
- Self-closing sliding doors
- Ecological freon

MODEL	UBS 137	UBP 137
External dimensions (WxDxH) cm.	137 x 73 x 200	137 x 73 x 200
Capacity (L)	958	958
Temperature Range (°C)	0 to +10	0 to +10
Doors	2	2
Door Dimensions (WxD) cm.	60 x 127	60 x 127
Plastic-coated grills (Pcs/Dimensions (WxD) cm.)	8 / 60,5 x 51	8 / 60,5 x 51
Inox feet / Wheels (Pcs/ Pcs/ Dim. (H) cm.)	2 / 4 / 2,5	2 / 4 / 2,5
Voltage / Frequency (V/Hz)	220 - 240 / 50	220 - 240 / 50
Input Power (W)	650	650
Compressor (HP)	1/2	1/2
Type of Cooling	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic
Controller	Digital	Digital
Refrigerant	R 290	R 290
Internal Light	LED	LED
Net Weight (kg)	195	190
Volume (m³)	2,00	2,00

UPRIGHT REFRIGERATED DISPLAY WITH 1 DOOR

UBK 90

INOX
304

7 cm



Meat hooks

- Stainless steel Exterior / Interior
- Insulation with ecological polyurethane 7cm
- H.A.C.C.P. rounded corners
- Double glasses
- Height adjustable inox feet
- Double meat hook
- Ecological freon

EXTRAS
UBK 90
UBK 160



DOOR LOCK



WHEELS



UPRIGHT REFRIGERATED DISPLAY WITH 2 DOORS

INOX
304



7 cm



UBK 160



- Stainless steel Exterior / Interior
- Insulation with ecological polyurethane 7cm
- H.A.C.C.P. rounded corners
- Double glasses
- Height adjustable inox feet
- Double meat hook
- Ecological freon


MODEL	UBK 90	UBK 160
External dimensions (WxDxH) cm.	90 x 80 x 220	160 x 80 x 220
Capacity (L)	924	1732
Temperature Range (°C)	2 to +10	2 to +10
Doors	1	2
Inox Feet (Pcs/Dimensions (H) cm.)	4 / 10 - 13	4 / 10 - 13
Voltage / Frequency (V/Hz)	220 - 240 / 50	220 - 240 / 50
Input Power (W)	700	750
Compressor (HP)	1/2	3/4
Type of Cooling	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic
Controller	Digital	Digital
Refrigerant	R 290	R 290
Internal Light	LED	LED
Net Weight (kg)	196	225
Volume (m³)	1,58	2,81

EXTRAS



WHEELS

MODEL	R0	R0 F
Description	Wheel	Wheel with brake

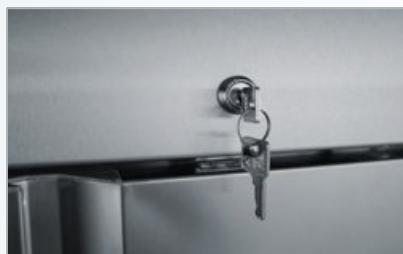

DOOR LOCK

MODEL	K1



GRILLS

MODEL	SI 1	SI 2	SI 3	SL 1	SL 2	SL 3
Dimensions (WxD) cm.	55 x 63	60,5 x 51	60,5 x 60,5	55 x 63	60,5 x 51	60,5 x 60,5
Color	Inox	Inox	Inox	White	White	White



STAINLESS STEEL PAIR SHEET FOR GN CONTAINERS

MODEL	GN




STAINLESS STEEL GASTRONORM CONTAINERS

More information on page 142

43 °C





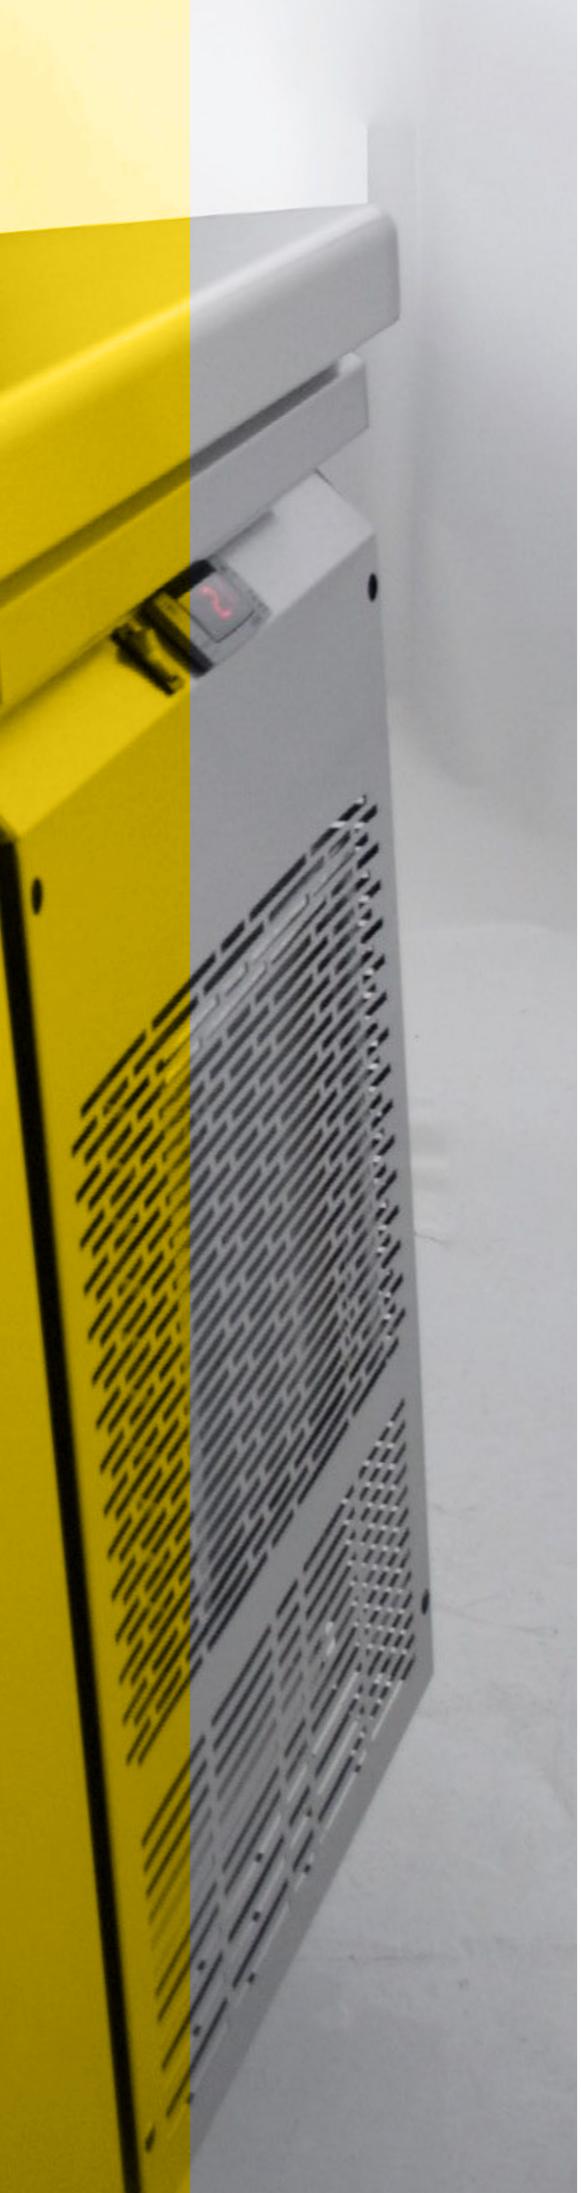

REFRIGERATED & FREEZER COUNTERS

► COMPACT	47-48
► REFRIGERATED COUNTER WITH GN DOORS	49-50
► UNDER MOUNTED COUNTER	51-52
► REFRIGERATED COUNTER WITH BIG DOORS	53-54
► WITHOUT COOLING INSTALLATION	55-56
55-56	
► REFRIGERATED BASE	57-57
57-57	
► WITH GLASS DOORS	59-60
► FREEZER COUNTER.....	61-62
► PREPARATION COUNTER.....	63-64
► COUNTER WITH SINK	65-66
► REFRIGERATED COUNTER WITH BASE TOP	67-68
COMBINATION WITH GN DOORS/DRAWERS.....	69-70
EXTRAS.....	71

REFRIGERATED COUNTER COMPACT WITH 2 GN DOORS

PGC 124



INOX
304



5 cm



- Stainless steel Exterior / Interior
- Insulation with ecological polyurethane 5cm
- Anti-corrosive protection on the evaporator
- H.A.C.C.P. rounded corners
- Self-closing doors
- Height adjustable inox feet
- Plastic-coated grills
- Stainless steel pair sheet for gastronorm containers
- Ecological freon



Table top detail



Gastronorm containers



GASTRONORM CONTAINERS



SUPPORT PAIRS - GN / SHELF



GRILLS



ON WORKTOP RACK



WHEELS

EXTRAS

PGC 124

PGC 124 S



TOP UPSTAND



DRAWERS

REFRIGERATED COUNTER COMPACT WITH DRAWERS

INOX
304



5 cm

PGC 124 S



- Stainless steel Exterior / Interior
- Insulation with ecological polyurethane 5cm
- Anti-corrosive protection on the evaporator
- H.A.C.C.P. rounded corners
- Gastro drawers
- Height adjustable inox feet
- Ecological freon

MODEL	PGC 124	PGC 124 S
External dimensions (WxDxH) cm.	124 x 70 x 85	124 x 70 x 85
Capacity (L)	344	344
Temperature Range (°C)	0 to +10	0 to +10
Doors / Drawers	2	4
Door Dimensions (WxH) cm.	45 x 67	-
Plastic-coated grills (Pcs/Dimensions (WxD) cm.)	2 / 41 x 48	-
Inox Feet (Pcs/Dimensions (H) cm.)	4 / 10 -13	4 / 10 -13
Voltage / Frequency (V/Hz)	220 - 240 / 50	220 - 240 / 50
Input Power (W)	350	350
Compressor (HP)	1/4	1/4
Type of Cooling	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic
Controller	Digital	Digital
Refrigerant	R 290	R 290
Internal Light	-	-
Net Weight (kg)	100	134
Volume (m³)	0,74	0,74

REFRIGERATED COUNTER

WITH GN DOORS

PG 139



INOX
304



5 cm



- Stainless steel Exterior / Interior
- Insulation with ecological polyurethane 5cm
- Anti-corrosive protection on the evaporator
- H.A.C.C.P. rounded corners
- Self-closing doors
- Height adjustable inox feet
- Plastic-coated grills
- Stainless steel pair sheet for gastronorm containers
- Ecological freon



Interior view



Gastronorm containers



EXTRAS

PG 139, PG 185

PG 239



GASTRONORM CONTAINERS



SUPPORT PAIRS - GN / SHELF



GRILLS



ON WORKTOP RACK



WHEELS



TOP UPSTAND



DRAWERS



WATER SUPPLY

REFRIGERATED COUNTER WITH GN DOORS

INOX
304



PG 239



- Stainless steel Exterior / Interior
- Insulation with ecological polyurethane 5cm
- Anti-corrosive protection on the evaporator
- H.A.C.C.P. rounded corners
- Self-closing doors
- Height adjustable inox feet
- Plastic-coated grills
- Stainless steel pair sheet for gastronorm containers
- Ecological freon

MODEL	PG 139	PG 185	PG 239
External dimensions (WxDxH) cm.	139 x 70 x 85	185 x 70 x 85	239 x 70 x 85
Capacity (L)	344	510	680
Temperature Range (°C)	0 to +10	0 to +10	0 to +10
Doors	2	3	4
Door Dimensions (WxH) cm.	45 x 67	45 x 67	45 x 67
Plastic-coated grills (Pcs/Dimensions (WxD) cm.)	2 / 41 x 48	3 / 41 x 48	4 / 41 x 48
Inox Feet (Pcs/Dimensions (H) cm.)	4 / 10 -13	4 / 10 -13	6 / 10 -13
Voltage / Frequency (V/Hz)	220 - 240 / 50	220 - 240 / 50	220 - 240 / 50
Input Power (W)	350	350	450
Compressor (HP)	1/4	3/8	1/2
Type of Cooling	Fan assisted	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic	Automatic
Controller	Digital	Digital	Digital
Refrigerant	R 290	R 290	R 290
Internal Light	LED	LED	LED
Net Weight (kg)	100	115	134
Volume (m³)	0,82	1,10	1,43

UNDER MOUNTED REFRIGERATED COUNTER WITH 2 GN DOORS

PG 110



INOX
304



5 cm



- Stainless steel Exterior / Interior
- Insulation with ecological polyurethane 5cm
- Anti-corrosive protection on the evaporator
- H.A.C.C.P. rounded corners
- Height adjustable feet
- Self-closing doors
- Plastic-coated grills
- Stainless steel pair sheet for gastronorm containers
- Ecological freon



EXTRAS

PG 110

PS 110



GRILLS

ON WORKTOP RACK



UNDER MOUNTED REFRIGERATED COUNTER WITH 2 DOUBLE DRAWERS

INOX
304



PS 110



- Stainless steel Exterior / Interior
- Insulation with ecological polyurethane 5cm
- Anti-corrosive protection on the evaporator
- H.A.C.C.P. rounded corners
- Height adjustable feet
- Gastro drawers
- Ecological freon

MODEL	PG 110	PS 110
External dimensions (WxDxH) cm.	110 x 70 x 85	110 x 70 x 85
Capacity (L)	215	215
Temperature Range (°C)	0 to +10	0 to +10
Doors / Drawers	2	4
Door / Drawer dimensions (WxH) cm.	45 x 46,5	4 / 45 x 58 x 46,5
Plastic-coated grills (Pcs/Dimensions (WxD) cm.)	2 / 41 x 48	-
Inox Feet (Pcs/Dimensions (H) cm.)	4 / 2,5	4 / 2,5
Voltage / Frequency (V/Hz)	220 - 240 / 50	220 - 240 / 50
Input Power (W)	350	350
Compressor (HP)	1/4	1/4
Type of Cooling	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic
Controller	Digital	Digital
Refrigerant	R 290	R 290
Internal Light	LED	-
Net Weight (kg)	90	118
Volume (m³)	0,65	0,65

REFRIGERATED COUNTER

WITH BIG DOORS

PM7 185



INOX
304



5 cm



- Stainless steel Exterior / Interior
- Insulation with ecological polyurethane 5cm
- Anti-corrosive protection on the evaporator
- H.A.C.C.P. rounded corners
- Self-closing sliding doors
- Height adjustable inox feet
- Plastic-coated grills
- Ecological freon



Plastic coated grills




Table top detail

EXTRAS
PM7 185



GRILLS



WHEELS



TOP UPSTAND



ON WORKTOP RACK



WATER SUPPLY



**REFRIGERATED COUNTER
WITH BIG DOORS**

SERIES 60

MODEL	PM6 155	PM6 185	PM6 216
External dimensions (WxDxH) cm.	155 x 60 x 85	185 x 60 x 85	216 x 60 x 85
Capacity (L)	332	420	510
Temperature Range (°C)	0 to +10	0 to +10	0 to +10
Doors	2	2	3
Door Dimensions (WxD) cm.	52 x 67	52 x 67	52 x 67
Plastic-coated grills (Pcs/Dimensions (WxD) cm.)	1 / 48 x 39,5 1 / 63 x 39,5	2 / 67 x 39,5	1 / 48 x 39,5 1 / 52,5 x 39,5 1 / 67 x 39,5
Inox Feet (Pcs/Dimensions (H) cm.)	4 / 10 -13	4 / 10 -13	6 / 10 -13
Voltage / Frequency (V/Hz)	220 - 240 / 50	220 - 240 / 50	220 - 240 / 50
Input Power (W)	350	350	450
Compressor (HP)	1/4	3/8	1/2
Type of Cooling	Fan assisted	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic	Automatic
Controller	Digital	Digital	Digital
Refrigerant	R 290	R 290	R 290
Internal Light	LED	LED	LED
Net Weight (kg)	105	124	145
Volume (m³)	0,79	0,94	1,28

SERIES 70

MODEL	PM7 155	PM7 185	PM7 216
External dimensions (WxDxH) cm.	155 x 70 x 85	185 x 70 x 85	216 x 70 x 85
Capacity (L)	405	510	620
Temperature Range (°C)	0 to +10	0 to +10	0 to +10
Doors	2	2	3
Door Dimensions (WxH) cm.	52 x 67	52 x 67	52 x 67
Plastic-coated grills (Pcs/Dimensions (WxD) cm.)	1 / 48 x 49,5 1 / 63 x 49,5	2 / 67 x 49,5	1 / 48 x 49,5 1 / 52,5 x 49,5 1 / 67 x 49,5
Inox Feet (Pcs/Dimensions (H) cm.)	4 / 10 -13	4 / 10 -13	6 / 10 -13
Voltage / Frequency (V/Hz)	220 - 240 / 50	220 - 240 / 50	220 - 240 / 50
Input Power (W)	350	350	450
Compressor (HP)	1/4	3/8	1/2
Type of Cooling	Fan assisted	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic	Automatic
Controller	Digital	Digital	Digital
Refrigerant	R 290	R 290	R 290
Internal Light	LED	LED	LED
Net Weight (kg)	110	130	150
Volume (m³)	0,92	1,10	1,28

REFRIGERATED COUNTER WITH GN DOORS

WITHOUT COOLING INSTALLATION

PK 124



INOX
304

L

5 cm

LED



- Stainless steel Exterior / Interior
- Insulation with ecological polyurethane 5cm
- Anti-corrosive protection on the evaporator
- H.A.C.C.P. rounded corners
- Self-closing doors
- Height adjustable Inox feet
- Plastic-coated grills
- Stainless steel pair sheet for gastronorm containers
- Fan assisted



Interior view



Plastic coated grills



EXTRAS

PK 124, PK 170

PK 216



GASTRONORM CONTAINERS



SUPPORT PAIRS - GN / SHELF



GRILLS



ON WORKTOP RACK



WHEELS



TOP UPSTAND



DRAWERS

REFRIGERATED COUNTER WITH GN DOORS

WITHOUT COOLING INSTALLATION

INOX
304



5 cm

LED

PK 170



- Stainless steel Exterior / Interior
- Insulation with ecological polyurethane 5cm
- Anti-corrosive protection on the evaporator
- H.A.C.C.P. rounded corners
- Self-closing doors
- Height adjustable inox feet
- Plastic-coated grills
- Stainless steel pair sheet for gastronorm containers
- Fan assisted

MODEL	PK 124	PK 170	PK 216
External dimensions (WxDxH) cm.	124 x 70 x 85	170 x 70 x 85	216 x 70 x 85
Capacity (L)	344	510	680
Temperature Range (°C)	0 to +10	0 έως +10	0 έως +10
Doors	2	3	4
Door Dimensions (WxH) cm.	45 x 67	45 x 67	45 x 67
Plastic-coated grills (Pcs/Dimensions (WxD) cm.)	2 / 41 x 48	3 / 41 x 48	4 / 41 x 48
Inox Feet (Pcs/Dimensions (H) cm.)	4 / 10 -13	4 / 10 -13	6 / 10 -13
Voltage / Frequency (V/Hz)	220 - 240 / 50	220 - 240 / 50	220 - 240 / 50
Controller	Digital	Digital	Digital
Internal Light	LED	LED	LED
Net Weight (kg)	80	95	117
Volume (m³)	0,73	1,01	1,28

CHEF BASE
WITH DOUBLE DRAWERS

PS 139



INOX
304



5 cm



- Stainless steel Exterior / Interior
- Insulation with ecological polyurethane 5cm
- Anti-corrosive protection on the evaporator
- H.A.C.C.P. rounded corners
- Height adjustable inox feet
- Gastro drawers
- Ecological freon



Chef base



Wheels

EXTRAS

PS 139, PS 185
PS 239



TOP UPSTAND



WHEELS



CHEF BASE
WITH DOUBLE DRAWERS

INOX
304



5 cm

PS 239



- Stainless steel Exterior / Interior
- Insulation with ecological polyurethane 5cm
- Anti-corrosive protection on the evaporator
- H.A.C.C.P. rounded corners
- Height adjustable inox feet
- Gastro drawers
- Ecological freon

MODEL	PS 139	PS 185	PS 239
External dimensions (WxDxH) cm.	139 x 70 x 68	185 x 70 x 68	239 x 70 x 68
Capacity (L)	255	376	500
Temperature Range (°C)	0 to +10	0 to +10	0 to +10
Drawers (Pcs/Dimensions (WxD) cm.)	4 / 45 x 50,5	6 / 45 x 50,5	8 / 45 x 50,5
Inox Feet (Pcs/Dimensions (H) cm.)	4 / 10 -13	4 / 10 -13	6 / 10 -13
Voltage / Frequency (V/Hz)	220 - 240 / 24,5	220 - 240 / 24,5	220 - 240 / 24,5
Input Power (W)	350	350	450
Compressor (HP)	1/4	3/8	1/2
Type of Cooling	Fan assisted	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic	Automatic
Controller	Digital	Digital	Digital
Refrigerant	R 290	R 290	R 290
Internal Light	-	-	-
Net Weight (kg)	117	132	151
Volume (m³)	0,66	0,88	1,13

REFRIGERATED COUNTER

WITH GLASS DOORS GN

PGG 139



INOX
304



5 cm



- Stainless steel Exterior / Interior
- Self-closing doors with double glass
- Anti-corrosive protection on the evaporator
- H.A.C.C.P. rounded corners
- Insulation with ecological polyurethane 5cm

- Height adjustable inox feet
- Plastic-coated grills
- Stainless steel pair sheet for gastronorm containers
- Ecological freon



Double glass door



Glass door



GASTRONORM CONTAINERS



SUPPORT PAIRS - GN / SHELF




GRILLS



ON WORKTOP RACK



WHEELS



TOP UPSTAND

EXTRAS

PGG 139

PGG 185



REFRIGERATED COUNTER
WITH GLASS DOORS GN

PGG 185



INOX
304



5 cm

LED



- Stainless steel Exterior / Interior
- Self-closing doors with double glass
- Anti-corrosive protection on the evaporator
- H.A.C.C.P. rounded corners
- Insulation with ecological polyurethane 5cm
- Height adjustable inox feet
- Plastic-coated grills
- Stainless steel pair sheet for gastronorm containers
- Ecological freon

MODEL	PGG 139	PGG 185
External dimensions (WxDxH) cm.	139 x 70 x 85	185 x 70 x 85
Capacity (L)	344	510
Temperature Range (°C)	0 to +10	0 to +10
Doors	2	3
Door Dimensions (WxH) cm.	45 x 67	45 x 67
Plastic-coated grills (Pcs/Dimensions (WxD) cm.)	2 / 41 x 48	3 / 41 x 48
Inox Feet (Pcs/Dimensions (H) cm.)	4 / 10 -13	4 / 10 -13
Voltage / Frequency (V/Hz)	220 - 240 / 50	220 - 240 / 50
Input Power (W)	350	350
Compressor (HP)	1/4	3/8
Type of Cooling	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic
Controller	Digital	Digital
Refrigerant	R 290	R 290
Internal Light	LED	LED
Net Weight (kg)	108	123
Volume (m³)	0,82	1,10

FREEZER COUNTER WITH GN DOORS

PGK 139



INOX
304



5 cm



- Stainless steel Exterior / Interior
- Insulation with ecological polyurethane 5cm
- Anti-corrosive protection on the evaporator
- H.A.C.C.P. rounded corners
- Self-closing doors
- Height adjustable inox feet
- Plastic-coated grills
- Stainless steel pair sheet for gastronorm containers
- Ecological freon



Table top detail



Gastronorm containers



GASTRONORM CONTAINERS



SUPPORT PAIRS - GN / SHELF



GRILLS



ON WORKTOP RACK



WHEELS

EXTRAS

PGK 139
PMK 185



TOP UPSTAND



DRAWERS



FREEZER COUNTER
WITH BIG DOORS

INOX
304



5 cm

PMK 185



- Stainless steel Exterior / Interior
- Insulation with ecological polyurethane 5cm
- Anti-corrosive protection on the evaporator
- H.A.C.C.P. rounded corners
- Self-closing doors
- Height adjustable inox feet
- Plastic-coated grills
- Ecological freon

MODEL	PGK 139	PMK 185
External dimensions (WxDxH) cm.	139 x 70 x 85	185 x 70 x 85
Capacity (L)	344	510
Temperature Range (°C)	0 to -18	0 to -18
Doors	2	2
Door Dimensions (WxH) cm.	45 x 67	52 x 67
Plastic-coated grills (Pcs/Dimensions (WxD) cm.)	2 / 41 x 48	2 / 67,5 x 49,5
Inox Feet (Pcs/Dimensions (H) cm.)	4 / 10 -13	4 / 10 -13
Voltage / Frequency (V/Hz)	220 - 240 / 50	220 - 240 / 50
Input Power (W)	350	450
Compressor (HP)	3/8	1/2
Type of Cooling	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic
Controller	Digital	Digital
Refrigerant	R 290	R 290
Internal Light	-	-
Net Weight (kg)	120	190
Volume (m³)	0,82	1,10

PREPARATION COUNTER

PIMG 139

INOX
304

5 cm



- Stainless steel Exterior / Interior
- Insulation with ecological polyurethane 5cm
- Anti-corrosive protection on the evaporator
- H.A.C.C.P. rounded corners
- Self-closing doors
- Height adjustable inox feet
- Plastic-coated grills
- Stainless steel pair sheet for gastronorm containers
- Place for GN containers 1/4 on the worktop
- Ecological freon



Gastronorm containers



Saladette interior

EXTRAS

PIMG 139, PIM 155
PIMG 185



GASTRONORM CONTAINERS



SUPPORT PAIRS - GN / SHELF



GRILLS



WHEELS



DRAWERS



PREPERATION COUNTER

INOX
304



5 cm

LED

PIMG 185



- Stainless steel Exterior / Interior
- Insulation with ecological polyurethane 5cm
- Anti-corrosive protection on the evaporator
- H.A.C.C.P. rounded corners
- Self-closing doors
- Height adjustable inox feet
- Plastic-coated grills
- Stainless steel pair sheet for gastronorm containers
- Place for GN containers 1/4 on the worktop
- Ecological freon

MODEL	PIMG 139	PIM 155	PIMG 185
External dimensions (WxDxH) cm.	139 x 70 x 85/95	155 x 70 x 85/95	185 x 70 x 85/95
Capacity (L)	366	368	532
Temperature Range (°C)	0 to +10	0 to +10	0 to +10
Doors	2	2	3
Door Dimensions (WxH) cm.	45 x 67	52 x 67	45 x 67
Plastic-coated grills (Pcs/Dimensions (WxD) cm.)	2 / 41 x 48	1 / 48 x 49,5 1 / 63 x 49,5	3 / 41 x 48
Stainless steel gastronorm containers 1/4 (Pcs)	8	9	10
Inox Feet (Pcs/Dimensions (H) cm.)	4 / 10 -13	4 / 10 -13	4 / 10 -13
Voltage / Frequency (V/Hz)	220 - 240 / 50	220 - 240 / 50	220 - 240 / 50
Input Power (W)	350	350	350
Compressor (HP)	1/4	1/4	3/8
Type of Cooling	Fan assisted	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic	Automatic
Controller	Digital	Digital	Digital
Refrigerant	R 290	R 290	R 290
Internal Light	LED	LED	LED
Net Weight (kg)	120	125	138
Volume (m³)	0,82	0,92	1,10

Prices do not include gastronorm containers

REFRIGERATED COUNTER WITH SINK 40X40 AND GN DOORS

PG 159-40L



INOX
304



5 cm



- Stainless steel Exterior / Interior
- Insulation with ecological polyurethane 5cm
- Anti-corrosive protection on the evaporator
- H.A.C.C.P. rounded corners
- Self-closing doors
- Height adjustable inox feet
- Plastic-coated grills
- Ecological freon

Water tap is not included



Plastic coated grills

EXTRAS

PG 159-40L
PG 205-40L



GASTRONORM CONTAINERS



SUPPORT PAIRS - GN / SHELF



GRILLS



WHEELS



REFRIGERATED COUNTER WITH SINK 40X40 AND GN DOORS

INOX
304



5 cm

LED

PG 205-40L



- Stainless steel Exterior / Interior
- Insulation with ecological polyurethane 5cm
- Anti-corrosive protection on the evaporator
- H.A.C.C.P. rounded corners
- Self-closing doors
- Height adjustable inox feet
- Plastic-coated grills
- Ecological freon

Water tap is not included

MODEL	PG 159-40L	PG 205-40L
External dimensions (WxDxH) cm.	159 x 70 x 118	205 x 70 x 118
Capacity (L)	358	510
Temperature Range (°C)	0 to +10	0 to +10
Doors	2	3
Door Dimensions (WxH) cm.	45 x 67	45 x 67
Plastic-coated grills (Pcs/Dimensions (WxD) cm.)	1 / 48 x 49,5 1 / 63 x 49,5	3 / 41 x 48
Inox Feet (Pcs/Dimensions (H) cm.)	4 / 10 - 13	4 / 10 - 13
Voltage / Frequency (V/Hz)	220 - 240 / 50	220 - 240 / 50
Input Power (W)	350	350
Compressor (HP)	1/4	3/8
Type of Cooling	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic
Controller	Digital	Digital
Refrigerant	R 290	R 290
Internal Light	LED	LED
Net Weight (kg)	132	148
Volume (m³)	0,94	1,21

REFRIGERATED COUNTER WITH BASE TOP AND BIG DOORS

MM 155



INOX
304



5 cm



- Stainless steel Exterior / Interior
- Insulation with ecological polyurethane 5cm
- Anti-corrosive protection on the evaporator
- H.A.C.C.P. rounded corners
- Self-closing doors
- Height adjustable inox feet
- Plastic-coated grills
- Ecological freon



Plastic coated grills

EXTRAS
MM 155
MM 185



GASTRONORM CONTAINERS



SUPPORT PAIRS - GN / SHELF



GRILLS



WHEELS



REFRIGERATED COUNTER WITH BASE TOP AND GN DOORS

INOX
304



5 cm

LED

MM 185



- Stainless steel Exterior / Interior
- Insulation with ecological polyurethane 5cm
- Anti-corrosive protection on the evaporator
- H.A.C.C.P. rounded corners
- Self-closing doors
- Height adjustable inox feet
- Plastic-coated grills
- Ecological freon

MODEL	MM 155	MM 185
External dimensions (WxDxH) cm.	155 x 70 x 118	185 x 70 x 118
Capacity (L)	368	436
Temperature Range (°C)	0 to +10	0 to +10
Doors	2	3
Door Dimensions (WxH) cm.	52 x 67	45 x 67
Plastic-coated grills (Pcs/Dimensions (WxD) cm.)	1 / 48 x 49,5 1 / 63 x 49,5	3 / 41 x 48
Inox Feet (Pcs/Dimensions (H) cm.)	4 / 10 -13	4 / 10 -13
Voltage / Frequency (V/Hz)	220 - 240 / 50	220 - 240 / 50
Input Power (W)	350	350
Compressor (HP)	1/4	3/8
Type of Cooling	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic
Controller	Digital	Digital
Refrigerant	R 290	R 290
Internal Light	LED	LED
Net Weight (kg)	128	140
Volume (m³)	1,28	1,52

REFRIGERATED COUNTERS- DRAWERS AND DOORS COMBINATIONS



PG 139 S



PG 139 SP

MODEL	PG 139 S	PG 139 SP
Dimensions (WxDxH) cm.	139 x 70 x 85	139 x 70 x 85



PG 185 S



PG 185 1S2P



PG 185 2S1P

MODEL	PG 185 S	PG 185 1S2P	PG 185 2S1P
Dimensions (WxDxH) cm.	185 x 70 x 85	185 x 70 x 85	185 x 70 x 85

REFRIGERATED COUNTERS- DRAWERS AND DOORS COMBINATIONS



PG 239 S



PG 239 2S2P



PG 239 1S3P

MODEL	PG 239 S	PG 239 2S2P	PG 239 1S3P
Dimensions (WxDxH) cm.	239 x 70 x 85	239 x 70 x 85	239 x 70 x 85

MULTIPLE COMBINATIONS OF DOORS AND DRAWERS



GN DOOR

MODEL	DGN
Door Dimensions (WxH) cm.	45 x 67



MODEL

Dimensions (WxDxH) cm.

PRICE - SIMPLE GUIDES

PRICE - TELESCOPIC GUIDES



S 1




S 2

DRAWERS

MODEL	S12	S1	S2
Dimensions (WxDxH) cm.		45 x 58 x 67	
PRICE - SIMPLE GUIDES			
PRICE - TELESCOPIC GUIDES			

* All appliances have simple guides

** Drawer guides are made of stainless steel AISI 304 and have durability of 60kg



COUNTER-TOP DISMOUNTABLE RACK

MODEL	R 110	R 139	R 155	R 185	R 216	R 239
Dimensions (WxDxH) cm.	110 x 35 x 70	139 x 35 x 70	155 x 35 x 70	185 x 35 x 70	216 x 35 x 70	239 x 35 x 70



TOP UPSTAND

MODEL	C 110	C 139	C 155	C 185	C 216	C 239
Dimensions (WxH) cm	110 x 6	139 x 6	155 x 6	185 x 6	216 x 6	239 x 6



GRILLS

INOX	MODEL	S 13	S 14	S 16	S 17	S 18	S 19	S 110	S 111
Dimensions (WxD) cm.	41 x 48	48 x 49,5	67 x 49,5	52,5 x 49,5	48 x 39,5	63 x 39,5	67 x 39,5	52,5 x 39,5	
PLASTIC COATED	MODEL	SL 3	SL 4	SL 6	SL 7	SL 8	SL 9	SL 10	SL 11



WHEELS

MODEL	R0	R0 F
Description	Wheel	Wheel with brake


WATER SUPPLY

MODEL	R1	R2
Description	Tap	G/N 1/2

BAMBAS^{trust}





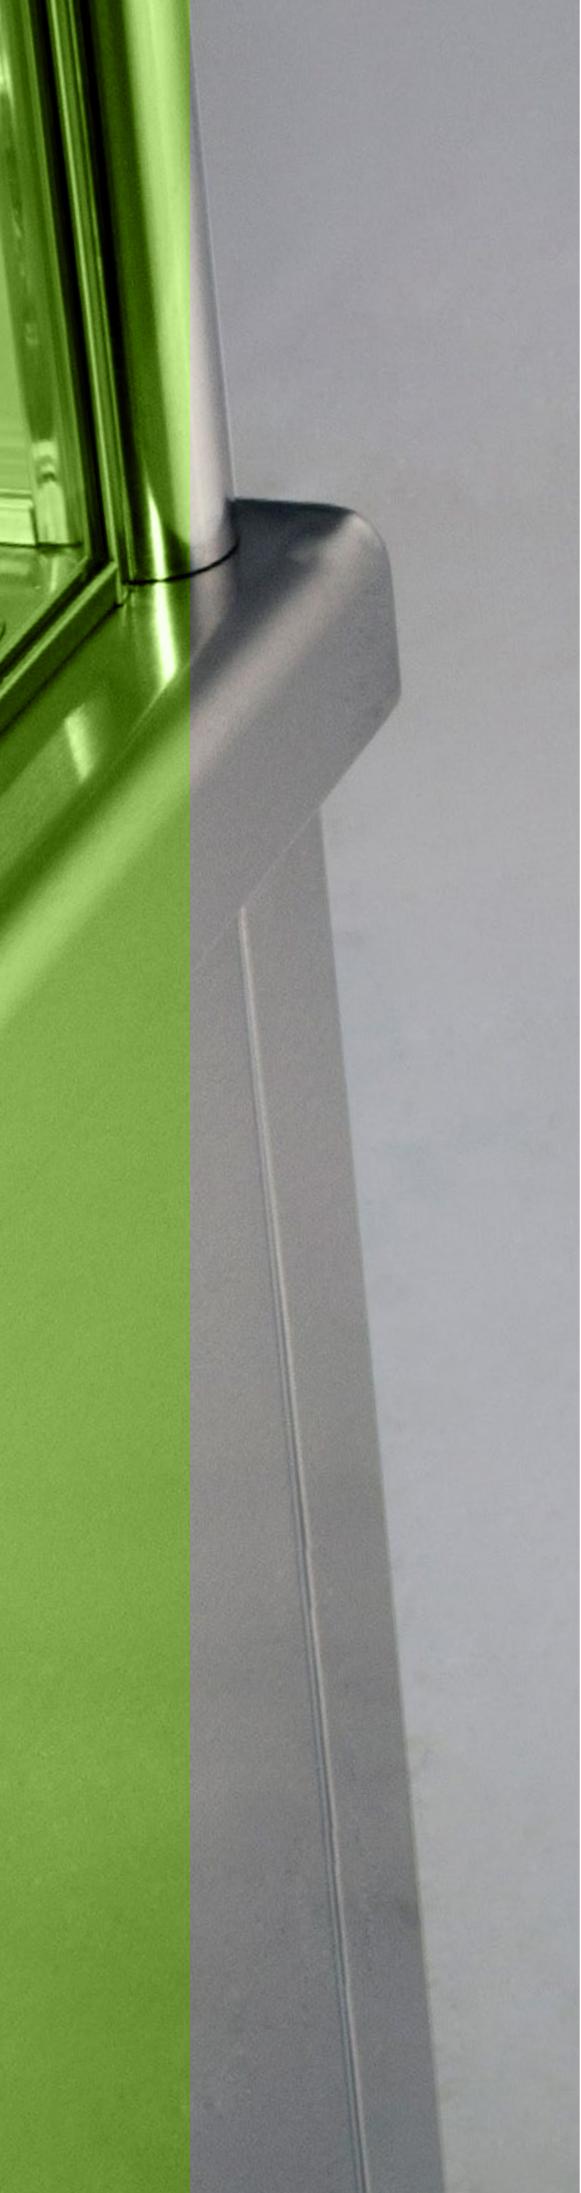

SALADETTE HEATED & COLD DISPLAYS BAIN MARIE

- ▶ BAKERY & PASTRY REFRIGERATED DISPLAY 75-76
- ▶ SALADETTE 77-80
- ▶ REFRIGERATED DISPLAY..... 81-84
- ▶ HEATED DISPLAY..... 85-86
- ▶ BAIN MARIE DISPLAY 87-88
- ▶ BAIN MARIE WITHOUT DISPLAY 89-90

BAKERY & PASTRY REFRIGERATED DISPLAY

FROST

ZE 198



INOX
304



5 cm



- Stainless steel Exterior / Interior
- Insulation with ecological polyurethane 5cm
- Height adjustable inox feet
- Plastic-coated grills
- Front with secret lighting
- Internal light on each shelf
- ON-OFF lighting switch
- Static cooling
- Ecological freon
- Inox frame, front panel, lighting



Possibility of manufacturing heated or neutral display



Front panel is available in multiple colors



BAKERY & PASTRY REFRIGERATED DISPLAY

FROST


INOX
304



5 cm

LED

Z 198

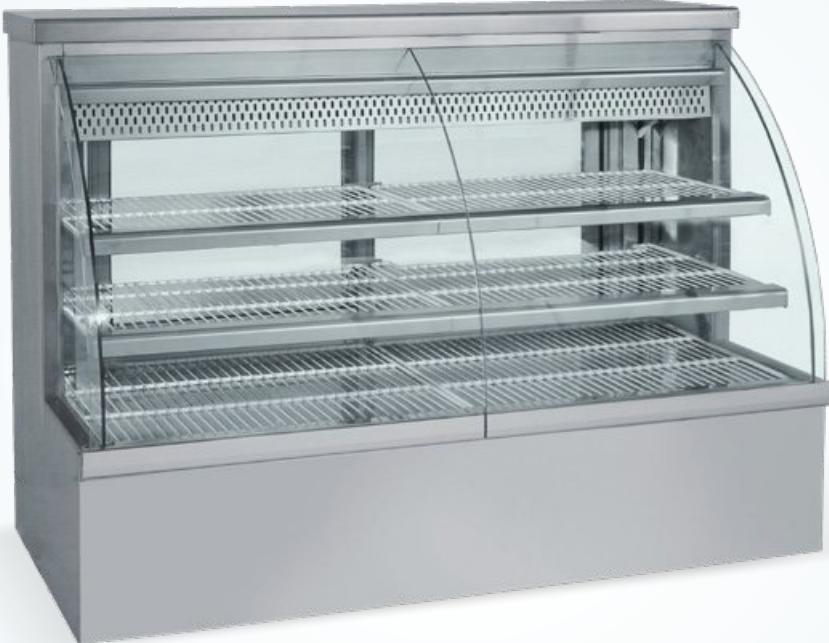

- Stainless steel Exterior / Interior
- Insulation with ecological polyurethane 5cm
- Height adjustable inox feet
- Plastic-coated grills
- Internal light on each shelf
- ON-OFF lighting switch
- Static cooling
- Ecological freon

MODEL	ZE 148	ZE 198	Z 148	Z 198
External dimensions (WxDxH) cm.	148 x 90 x 130	198 x 90 x 130	148 x 83 x 130	198 x 83 x 130
Temperature Range (°C)	+3 to +10	+3 to +10	+3 to +10	+3 to +10
Doors	2	2	2	2
Plastic-coated grills (Pcs/Dimensions (WxD) cm.)	2 / 68 x 47,5 2 / 68 x 55 2 / 68 x 63	2 / 93 x 47 2 / 93 x 55 2 / 93 x 63	2 / 68 x 47,5 2 / 68 x 55 2 / 68 x 63	2 / 93 x 47 2 / 93 x 55 2 / 93 x 63
Inox Feet (Pcs/Dimensions (H) cm.)	4 / 6	4 / 6	4 / 6	4 / 6
Voltage / Frequency (V/Hz)	220 - 240 / 50	220 - 240 / 50	220 - 240 / 50	220 - 240 / 50
Input Power (W)	450	600	450	600
Compressor (HP)	3/8	1/2	3/8	1/2
Type of Cooling	Static	Static	Static	Static
Type of Defrost	Automatic	Automatic	Automatic	Automatic
Controller	Digital	Digital	Digital	Digital
Refrigerant	R 290	R 290	R 290	R 290
Internal Light	LED	LED	LED	LED
Net Weight (kg)	200	236	200	236
Volume (m³)	1,61	2,15	1,61	2,15

SALADETTE WITH DISPLAY

SM 185



INOX
304



5 cm



- Stainless steel Exterior / Interior
- Insulation with ecological polyurethane 5cm
- Anti-corrosive protection on the evaporator
- H.A.C.C.P. rounded corners
- Self-closing doors
- Height adjustable inox feet
- Plastic-coated grills
- Glass shelf
- On the worktop display for GN containers placement
- Ecological freon



Plastic coated grills



Gastronorm containers

EXTRAS

SM 110, SM 155
SM 185



GASTRONORM CONTAINERS



SUPPORT PAIRS - GN / SHELF



GRILLS



WHEELS

INOX
304



5 cm

LED



SM 110



- Stainless steel Exterior / Interior
- Insulation with ecological polyurethane 5cm
- Anti-corrosive protection on the evaporator
- H.A.C.C.P. rounded corners
- Self-closing doors
- Height adjustable inox feet
- Plastic-coated grills
- Glass shelf
- On the worktop display for GN containers placement
- Ecological freon

MODEL	SM 110	SM 155	SM 185
External dimensions (WxDxH) cm.	110 x 70 x 130	155 x 70 x 130	185 x 70 x 130
Capacity Storage (L)	215	368	450
Temperature Range (°C)	+3 to +10	+3 to +10	+3 to +10
Doors	2	2	3
Door Dimensions (WxD) cm.	45 x 46,5	52 x 67	45 x 67
Plastic-coated grills (Pcs/Dimensions (WxD) cm.)	2 / 41 x 48	1 / 48 x 49,5 1 / 63 x 49,5	3 / 41 x 48
Place for GN Containers 1/4 (Pcs)	9	9	13
Inox Feet (Pcs/Dimensions (H) cm.)	4 / 2,5	4 / 10 -13	4 / 10 -13
Voltage / Frequency (V/Hz)	220 - 240 / 50	220 - 240 / 50	220 - 240 / 50
Input Power (W)	350	350	350
Compressor (HP)	1/4	3/8	3/8
Type of Cooling	Fan assisted	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic	Automatic
Controller	Digital	Digital	Digital
Refrigerant	R 290	R 290	R 290
Internal Light	LED	LED	LED
Internal Light Storage	LED	LED	LED
Net Weight (kg)	110	145	176
Volume (m³)	1,00	1,41	1,68

Prices do not include gastronorm containers

SMGN 139



INOX
304



5 cm



- Stainless steel Exterior / Interior
- Insulation with ecological polyurethane 5cm
- Anti-corrosive protection on the evaporator
- H.A.C.C.P. rounded corners
- Self-closing doors
- Height adjustable inox feet
- Plastic-coated grills
- Glass shelf
- On the worktop display for GN 1/1 containers placement
- Ecological freon



Plastic coated grills



Gastronorm containers

EXTRAS
SMGN 139,
SMGN 185
SMGN 239



GASTRONORM CONTAINERS



DRAWERS



WHEELS

SMGN 185



- Stainless steel Exterior / Interior
- Insulation with ecological polyurethane 5cm
- Anti-corrosive protection on the evaporator
- H.A.C.C.P. rounded corners
- Self-closing doors
- Height adjustable inox feet
- Plastic-coated grills
- Glass shelf
- On the worktop display for GN 1/1 containers placement
- Ecological freon

MODEL	SMGN 139	SMGN 185	SMGN 239
External dimensions (WxDxH) cm.	139 x 70 x 130	185 x 70 x 130	239 x 70 x 130
Capacity Storage (L)	366	532	706
Temperature Range (°C)	+3 to +10	+3 to +10	+3 to +10
Doors	2	3	4
Door Dimensions (WxD) cm.	45 x 67	45 x 67	45 x 67
Place for GN Containers 1/1 (Pcs)	4	5	7
Inox Feet (Pcs/Dimensions (H) cm.)	4 / 10 - 13	4 / 10 - 13	6 / 10 - 13
Voltage / Frequency (V/Hz)	220 - 240 / 50	220 - 240 / 50	220 - 240 / 50
Input Power (W)	350	350	350
Compressor (HP)	1/4	3/8	1/2
Type of Cooling	Fan assisted	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic	Automatic
Controller	Digital	Digital	Digital
Refrigerant	R 290	R 290	R 290
Internal Light	LED	LED	LED
Internal Light Storage	LED	LED	LED
Net Weight (kg)	120	176	203
Volume (m³)	1,00	1,41	1,63

Prices do not include gastronorm containers

REFRIGERATED DISPLAY

FO 110



INOX
304

5 cm

LED



- Stainless steel Exterior / Interior
- Insulation with ecological polyurethane 5cm
- Static cooling
- Ability to preserve fishes and seafood with ice
- Drainage system
- Ecological freon



Suggest to display sea food in ice



INOX
304

5 cm

LED

FO 110

(Back side)



MODEL	FO 110	FO 150
External dimensions (WxDxH) cm.	110 x 85 x 125	150 x 85 x 125
Temperature Range (°C)	+2 to +10	+2 to +10
Wheels	4 (2 with brake)	4 (2 with brake)
Voltage / Frequency (V/Hz)	220 - 240 / 50	220 - 240 / 50
Input Power (W)	350	350
Compressor (HP)	3/8	3/8
Type of Cooling	Static	Static
Type of Defrost	Automatic	Automatic
Controller	Digital	Digital
Refrigerant	R 290	R 290
Internal Light	LED	LED
Net Weight (kg)	99	120
Volume (m³)	1,04	1,42

SELF SERVICE REFRIGERATED DISPLAY

FS 110



INOX
304

5 cm

LED



- Stainless steel Exterior / Interior
- Insulation with ecological polyurethane 5cm
- Static cooling
- Ability to preserve fishes and seafood with ice
- Drainage system
- Ecological Freon



Suggest to display sea food in ice



SELF SERVICE REFRIGERATED DISPLAY

**INOX
304**

5 cm

LED

FS 150



MODEL	FS 110	FS 150
External dimensions (WxDxH) cm.	110 x 85 x 97	150 x 85 x 97
Temperature Range (°C)	+2 to +10	+2 to +10
Wheels	4 (2 with brake)	4 (2 with brake)
Voltage / Frequency (V/Hz)	220 - 240 / 50	220 - 240 / 50
Input Power (W)	350	350
Compressor (HP)	3/8	3/8
Type of Cooling	Static	Static
Type of Defrost	Automatic	Automatic
Controller	Digital	Digital
Refrigerant	R 290	R 290
Internal Light	LED	LED
Net Weight (kg)	85	107
Volume (m³)	1,04	1,42

HEATED DISPLAY ON CUPBOARD

HD 110




INOX
304



LED

- Stainless steel Exterior / Interior
- Height adjustable inox feet
- Display with heated top
- Indicative lamp service
- Heating element
- ON-OFF lighting switch
- Storage with shelf
- Sliding doors
- Internal LED light



Analog controller

EXTRAS

HD 110, HD 140



WHEELS

COUNTER-TOP HEATED DISPLAY

INOX
304



LED



HT 80



- Stainless steel Exterior / Interior
- Display with heated top
- Indicative lamp service
- Heating element
- ON-OFF lighting switch
- Internal LED light

COUNTER-TOP HEATED DISPLAY

MODEL	HT 80	HT 100	HT 120
External dimensions (WxDxH) cm.	80 x 53 x 57,5	100 x 53 x 57,5	120 x 53 x 57,5
Temperature Range (°C)	+30 to +90	+30 to +90	+30 to +90
Controller	Analog	Analog	Analog
Input Power (W)	1420	1620	1820
Voltage / Frequency (V/Hz)	220 - 240 / 50	220 - 240 / 50	220 - 240 / 50
Plastic feet	4	4	4
Internal Light	LED	LED	LED
Net Weight (kg)	32	36	40
Volume (m³)	0,22	0,27	0,33

HEATED DISPLAY ON CUPBOARD

MODEL	HD 110	HD 140
External dimensions (WxDxH) cm.	110 x 70 x 130	140 x 70 x 130
Capacity (L)	455	579
Temperature Range (°C)	+30 to +90	+30 to +90
Controller	Analog	Analog
Input Power (W)	1800	2350
Voltage / Frequency (V/Hz)	220 - 240 / 50	220 - 240 / 50
Sliding doors	2	2
Inox Feet (Pcs/Dimensions (H) cm.)	4 / 10 -13	4 / 10 -13
Internal Light	LED	LED
Net Weight (kg)	95	110
Volume (m³)	1,00	1,27

BAIN MARIE ON CUPBOARD WITH DISPLAY

MD 106



INOX
304



LED



- Stainless steel Exterior / Interior
- Height adjustable inox feet
- Indicative lamp service
- Heating element
- Water exit valve
- ON-OFF lighting switch
- Storage with shelf
- Sliding doors
- Internal LED light



Water exit valve



Bain marie detail

EXTRAS
MD 106, MD 138
MD 170



GASTRONORM CONTAINERS



WHEELS

COUNTER-TOP BAIN MARIE WITH DISPLAY

INOX
304



LED

MT 106



- Stainless steel Exterior / Interior
- Indicative lamp service
- Heating element
- Water exit valve
- ON-OFF lighting switch
- Internal LED light

COUNTER-TOP BAIN MARIE

MODEL	MT 106	MT 138
External dimensions (WxDxH) cm.	106 x 70 x 77	138 x 70 x 77
Temperature Range (°C)	+30 to +90	+30 to +90
Controller	Analog	Analog
Input Power (W)	1500	1500
Voltage / Frequency (V/Hz)	220 - 240 / 50	220 - 240 / 50
Shelves	-	-
Stainless steel gastronorm containers 1/1 (Pcs)	3	4
Plastic feet	4	4
Internal Light	LED	LED
Net Weight (kg)	34	58
Volume (m³)	0,55	0,70

Prices do not include gastronorm containers.

BAIN MARIE ON CUPBOARD

MODEL	MD 106	MD 138	MD 170
External dimensions (WxDxH) cm.	106 x 70 x 130	138 x 70 x 130	170 x 70 x 130
Capacity (L)	455	579	744
Temperature Range (°C)	+30 to +90	+30 to +90	+30 to +90
Controller	Analog	Analog	Analog
Input Power (W)	1500	1500	3000
Voltage / Frequency (V/Hz)	220 - 240 / 50	220 - 240 / 50	220 - 240 / 50
Doors	2	2	2
Stainless steel gastronorm containers. 1/1 (Pcs)	3	4	5
Inox Feet (Pcs/Dimensions (H) cm.)	4 / 10 -13	4 / 10 -13	4 / 10 -13
Internal Light	LED	LED	LED
Net Weight (kg)	95	110	130
Volume (m³)	1,00	1,75	2,10

Prices do not include gastronorm containers.

BAIN MARIE ON CUPBOARD

MDX 106



INOX
304



- Stainless steel Exterior / Interior
- Height adjustable inox feet
- Indicative lamp service
- Heating element
- Water exit valve
- Storage with shelf
- Sliding doors



Water exit valve

EXTRAS

MDX 106, MDX 138
MDX 170
MTX 106, MTX 138



GASTRONORM CONTAINERS



WHEELS

INOX
304

MTX 106



- Stainless steel Exterior / Interior
- Indicative lamp service
- Heating element
- Water exit valve

COUNTER-TOP BAIN MARIE

MODEL	MTX 106	MTX 138
External dimensions (WxDxH) cm.	106 x 70 x 27	138 x 70 x 27
Temperature Range (°C)	+30 to +90	+30 to +90
Controller	Analog	Analog
Input Power (W)	1500	1500
Voltage / Frequency (V/Hz)	220 - 240 / 50	220 - 240 / 50
Shelves	-	-
Stainless steel gastronorm containers 1/1 (Pcs)	3	4
Plastic feet	4	4
Net Weight (kg)	52	62
Volume (m³)	0,16	0,21

Prices do not include gastronorm containers

BAIN MARIE ON CUPBOARD

MODEL	MDX 106	MDX 138	MDX 170
External dimensions (WxDxH) cm.	106 x 70 x 85	138 x 70 x 85	170 x 70 x 85
Capacity (L)	455	579	744
Temperature Range (°C)	+30 to +90	+30 to +90	+30 to +90
Controller	Analog	Analog	Analog
Input Power (W)	1500	1500	3000
Voltage / Frequency (V/Hz)	220 - 240 / 50	220 - 240 / 50	220 - 240 / 50
Doors	2	2	2
Stainless steel gastronorm containers 1/1 (Pcs)	3	4	5
Inox Feet (Pcs/Dimensions (H) cm.)	4 / 10 - 13	4 / 10 - 13	4 / 10 - 13
Net Weight (kg)	76	98	105
Volume (m³)	0,65	0,83	1,01

Prices do not include gastronorm containers



ice cream

is
the
dark






LUX SERIES

- ▶ REFRIGERATED DISPLAY..... 95-96
- ▶ HEATED DISPLAY..... 97-98
- ▶ CASHIER 99-100

INOX
CORIAN

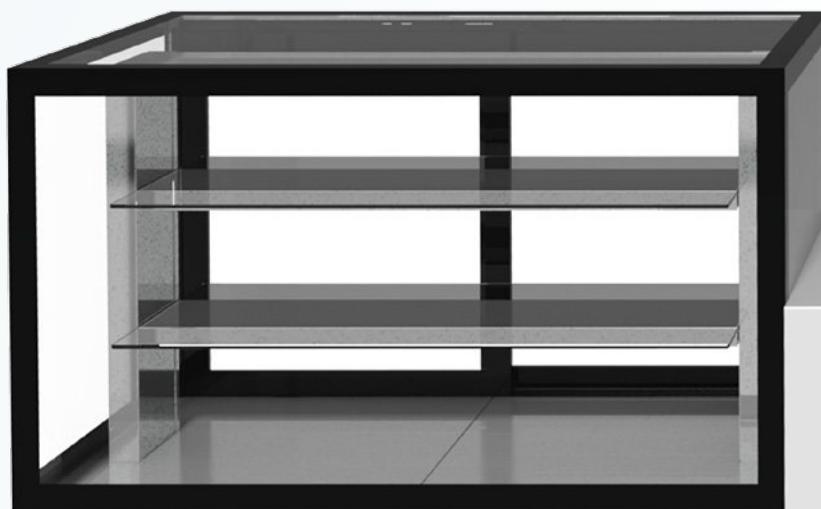


- Exterior made of Corian and stainless steel AISI 304
- Interior stainless steel 304
- Available models, Refrigerator, Heated and Cashier
- Front decoration with corian and customer choice color
- Insulation with ecological polyurethane 5cm
- Magnetic closing sliding doors



INOX
3045
cm

LED

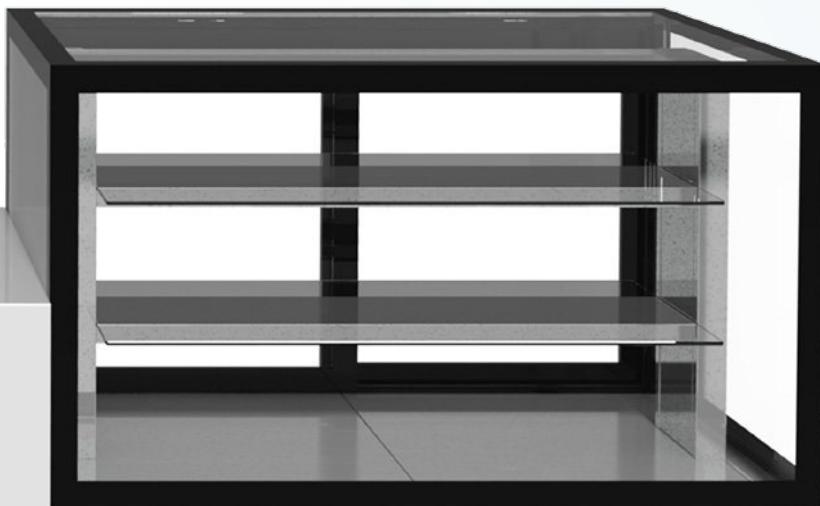

- Display LED lighting
- Uniform cooling / heating distribution on each shelf through air flow system
- Double glasses for low energy consumption
- Height adjustable inox feet
- Ecological Freon



BAKERY & PASTRY REFRIGERATED DISPLAY

LUX

BFK 108

CORIAN



CORIAN

INOX
304


5 cm

LED

WHITE GLOSS
FINISH

BLACK GLOSS
FINISH

- Exterior made of corian and stainless steel 304
- Interior stainless steel 304
- Front decoration with corian and customer choice color
- Insulation with ecological polyurethane 5cm
- Glass shelves
- Magnetic closing sliding doors
- Display LED lighting
- Front decoration with secret lighting LED
- Uniform cooling distribution on each shelf through air flow system
- Air speed regulator
- Double glasses for low energy consumption
- Fan assisted cooling
- Height adjustable inox feet
- Ecological freon

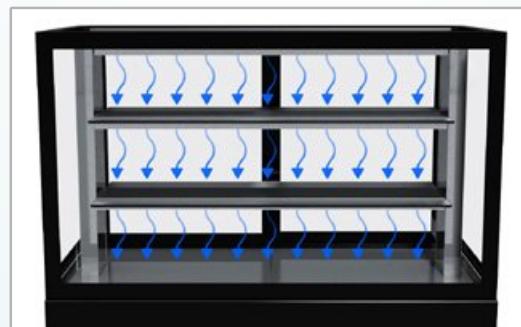

Smart adjustable air flow system for uniform cooling

BAKERY & PASTRY REFRIGERATED DISPLAY

LUX

CORIAN

INOX
304

5 cm

LED

BFK 108

INOX



MODEL	BFK 108	BFK 138
External dimensions (WxDxH) cm.	108 x 70 x 120	138 x 70 x 120
Temperature Range (°C)	+3 to +10	+3 to +10
Sliding Doors	2	2
Inox Feet (Pcs/Dimensions (H) cm.)	4 / 10 - 13	4 / 10 - 13
Voltage / Frequency (V/Hz)	220 - 240 / 50	220 - 240 / 50
Input Power (W)	435	600
Compressor (HP)	1/2	3/4
Type of Cooling	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic
Controller	Digital	Digital
Refrigerant	R 290	R 290
Internal Light	LED	LED
Decoration Light	LED	LED
Net Weight (kg)	153	190
Volume (m³)	1,28	1,75
PRICE - Decoration CORIAN		
PRICE - Decoration INOX		

BAKERY & PASTRY HEATED DISPLAY
LUX

BHK 108

CORIAN



CORIAN

INOX
304

5 cm

LED



WHITE GLOSS
FINISH



BLACK GLOSS
FINISH

- Exterior made of corian and stainless steel 304
- Interior stainless steel 304
- Front decoration with corian and customer choice color
- Insulation with ecological polyurethane 5cm
- Glass shelves
- Magnetic closing sliding doors
- Display LED lighting
- Front decoration with secret lighting LED
- Uniform heating distribution on each shelf through air flow system
- Double glasses for low energy consumption
- Height adjustable inox feet



Display top side

CORIAN

INOX
304

5 cm

W

LED

BHK 108

INOX



MODEL	BHK 108	BHK 138
External dimensions (WxDxH) cm.	108 x 70 x 120	138 x 70 x 120
Temperature Range (°C)	+30 to +60	+30 to +60
Sliding Doors	2	2
Inox Feet (Pcs/Dimensions (H) cm.)	4 / 10 - 13	4 / 10 - 13
Voltage / Frequency (V/Hz)	220 - 240 / 50	220 - 240 / 50
Input Power (W)	1030	2050
Controller	Digital	Digital
Internal Light	LED	LED
Decoration Light	LED	LED
Net Weight (kg)	115	130
Volume (m³)	1,28	1,75
PRICE - Decoration WOOD		
PRICE - Decoration INOX		

CASHIER COUNTER
LUX

BT 80


CORIAN



CORIAN

INOX
304

LED

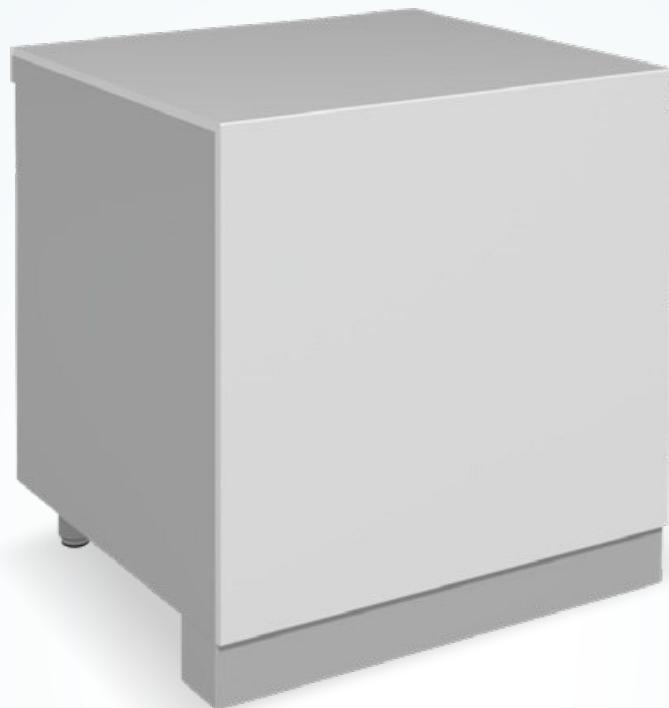

WHITE GLOSS
FINISH



BLACK GLOSS
FINISH

- Exterior made of corian, glass and stainless steel 304
- Interior stainless steel 304
- Front decoration with mat glass and changing color LED
- Corner cashier available on request only
- Interior shelf
- Height adjustable inox feet



Storage with shelf

CASHIER COUNTER
LUX

CORIAN

INOX
304

BT 80



INOX



WHITE GLOSS
FINISH



BLACK GLOSS
FINISH

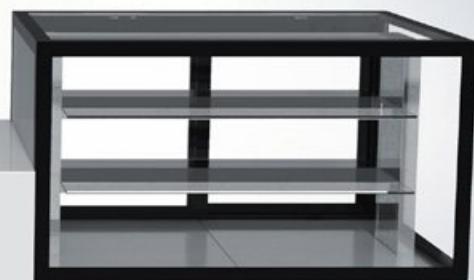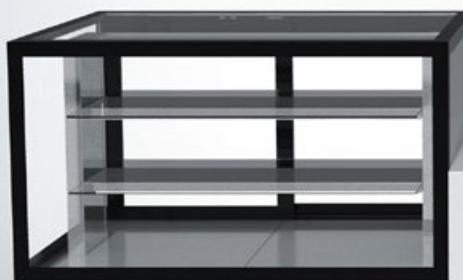

LUX LINE placement view

MODEL	BT 80	BT 100	BT 150
External dimensions (WxDxH) cm.	80 x 70 x 85	100 x 70 x 85	150 x 70 x 85
Shelves	1	1	1
Inox Feet (Pcs/Dimensions (H) cm.)	4 / 10 - 13	4 / 10 - 13	4 / 10 - 13
Net Weight (kg)	40	50	65
Volume (m³)	0,61	0,82	1,20
PRICE - Decoration WOOD			
PRICE - Decoration INOX			





CORIAN FROST SERIES

- ▶ REFRIGERATED DISPLAY 103-104
- ▶ BAIN MARIE 105-106
- ▶ HEATED DISPLAY 107-108
- ▶ CASHIER 109-110
- ▶ EXTRAS 111-112

REFRIGERATED DISPLAY

CORIAN FROST

BFC 110

GLASS



CORIAN

INOX
304

L

5 cm

LED



Possibility of changing light color in GLASS decoration model

- Exterior made of corian, glass and stainless steel 304
- Interior stainless steel 304
- Front decoration with matte glass and LED light
- Insulation with ecological polyurethane 5cm
- Height adjustable inox feet
- Glass shelf at the display
- Cooling storage space
- Cooling display for GN containers or inox trays placement
- ON-OFF lighting switch
- Ecological freon



Refrigerated storage



Refrigerated display

BFC 110

WOOD
INOX



WOOD



Front panel is available in multiple colors



INOX



MODEL	BFC 110	BFC 150	BFC 180
External dimensions (WxDxH) cm.	110 x 90 x 130	150 x 90 x 130	180 x 90 x 130
Temperature Range (°C)	+3 to +10	+3 to +10	+3 to +10
Doors	1	2	2
Stainless steel gastronorm containers 1/1 (Pcs)	3	4	5
Inox Feet (Pcs/Dimensions (H) cm.)	4 / 10-13	4 / 10-13	4 / 10-13
Voltage / Frequency (V/Hz)	220 - 240 / 50	220 - 240 / 50	220 - 240 / 50
Input Power (W)	350	500	550
Compressor (HP)	3/8	1/2	1/2
Type of Cooling	Fan assisted	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic	Automatic
Controller	Digital	Digital	Digital
Refrigerant	R 290	R 290	R 290
Internal Light	LED	LED	LED
Decoration Light	LED	LED	LED
Net Weight (kg)	155	175	200
Volume (m³)	1,28	1,75	2,10
PRICE - Decoration GLASS			
PRICE - Decoration WOOD			
PRICE - Decoration INOX			

Prices do not include gastronorm containers

BAIN MARIE DISPLAY

CORIAN FROST

CMF 110

GLASS



CORIAN

INOX
304

L

5 cm

W

LED



Possibility of
changing light
color in GLASS
decoration model

- Exterior made of corian, glass and stainless steel 304
- Interior stainless steel 304
- Front decoration with matte glass and LED light
- Insulation with ecological polyurethane 5cm
- Height adjustable inox feet
- Resistance thermostat
- Water exit valve
- Storage space
- LED lighting on display
- ON-OFF lighting switch



Bain marie detail



Storage doors



Water exit valve



CMF 110

WOOD
INOX



WOOD



Front panel is available in multiple colors



INOX



MODEL	CMF 110	CMF 150	CMF 180
External dimensions (WxDxH) cm.	110 x 90 x 130	150 x 90 x 130	180 x 90 x 130
Temperature Range (°C)	+30 to +90	+30 to +90	+30 to +90
Sliding Doors	2	2	2
Stainless steel gastronorm containers 1/1 (Pcs)	3	4	5
Inox Feet (Pcs/Dimensions (H) cm.)	4 / 10-13	4 / 10-13	4 / 10-13
Voltage / Frequency (V/Hz)	220 - 240 / 50	220 - 240 / 50	220 - 240 / 50
Input Power (W)	1550	1550	3050
Controller	Analog	Analog	Analog
Internal Light	LED	LED	LED
Decoration Light	LED	LED	LED
Net Weight (kg)	115	130	140
Volume (m³)	1,28	1,75	2,10
PRICE - Decoration GLASS			
PRICE - Decoration WOOD			
PRICE - Decoration INOX			

Prices do not include gastronorm containers

HEATED DISPLAY CORIAN FROST

CHF 110

GLASS



CORIAN

INOX
304

L

5 cm

W

LED



Possibility of
changing light
color in GLASS
decoration model

- Exterior made of corian, glass and stainless steel 304
- Interior stainless steel 304
- Front decoration with matte glass and LED light
- Insulation with ecological polyurethane 5cm
- Glass shelf at the display
- Height adjustable inox feet
- Display with heated top
- Indicative lamp service
- Heating element
- ON-OFF lighting switch
- LED light on the display



Storage doors

CHF 110

WOOD
INOX



WOOD



Front panel is available in multiple colors



INOX



MODEL	CHF 110	CHF 150	CHF 180
External dimensions (WxDxH) cm.	110 x 90 x 130	150 x 90 x 130	180 x 90 x 130
Temperature Range (°C)	+30 to +90	+30 to +90	+30 to +90
Sliding Doors	2	2	2
Inox Feet (Pcs/Dimensions (H) cm.)	4 / 10-13	4 / 10-13	4 / 10-13
Voltage / Frequency (V/Hz)	220 - 240 / 50	220 - 240 / 50	220 - 240 / 50
Input Power (W)	1650	2350	3550
Controller	Analog	Analog	Analog
Internal Light	LED	LED	LED
Decoration Light	LED	LED	LED
Net Weight (kg)	130	153	190
Volume (m³)	1,28	1,75	2,10
PRICE - Decoration GLASS			
PRICE - Decoration WOOD			
PRICE - Decoration INOX			

CASHIER COUNTER
CORIAN FROST


CTF 80

GLASS

CORIAN

INOX
304

LED

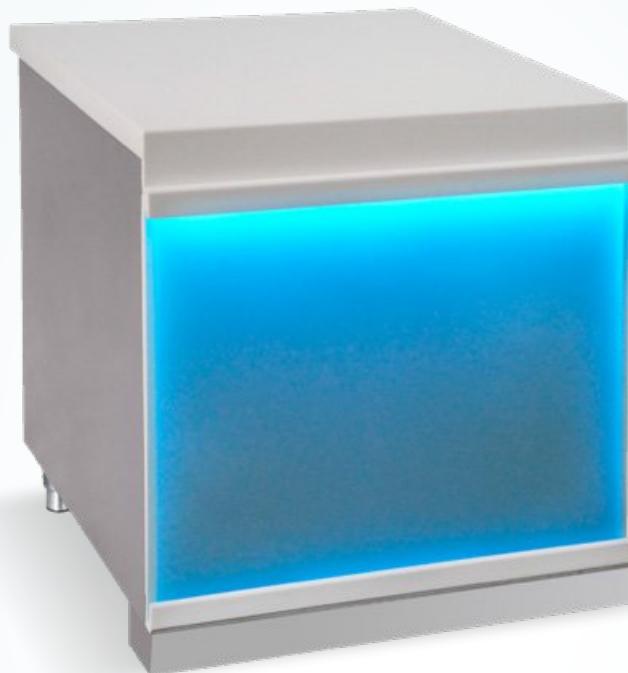

Possibility of
changing light
color in GLASS
decoration model

- Exterior made of corian, glass and stainless steel 304
- Interior stainless steel 304
- Front decoration with matte glass and LED light
- Corner cashier available on request only
- Interior shelf
- Height adjustable inox feet



Storage with shelf

CORIAN

INOX
304

WOOD



Front panel is available in multiple colors



CTF 80

WOOD
INOX


INOX



MODEL	CTF 80	CTF 100	CTF 150
External dimensions (WxDxH) cm.	80 x 90 x 85	100 x 90 x 85	150 x 90 x 85
Shelves	1	1	1
Inox Feet (Pcs/Dimensions (H) cm.)	4 / 10-13	4 / 10-13	4 / 10-13
Net Weight (kg)	40	50	65
Volume (m³)	0,61	0,76	1,15
PRICE - Decoration GLASS			
PRICE - Decoration WOOD			
PRICE - Decoration INOX			

CORIAN FROST LINE

GLASS

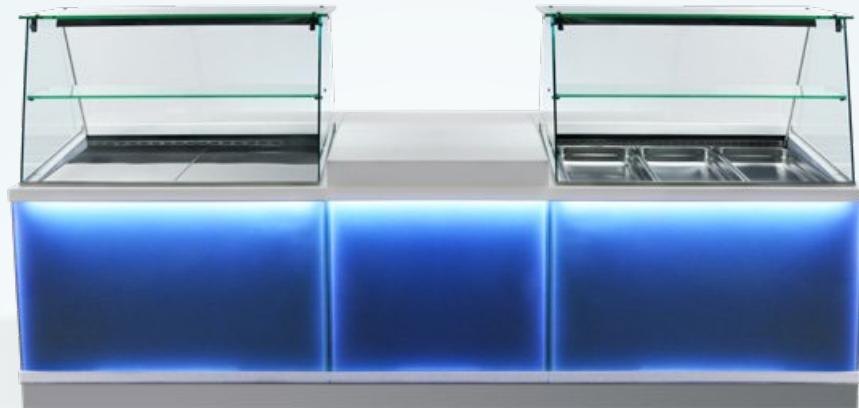


WOOD



INOX



GLASS

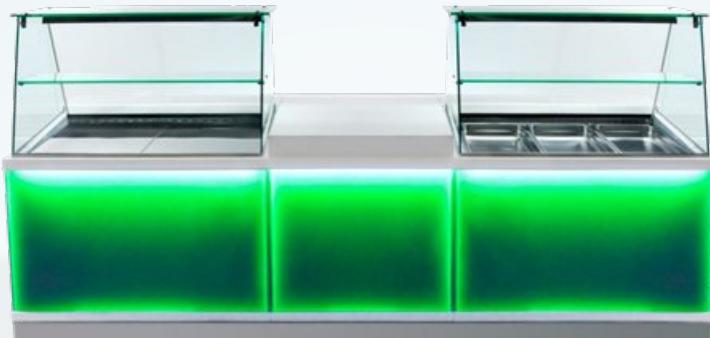

Possibility of choosing light color in GLASS decoration (no charge)

BLUE

RED

GREEN

YELLOW

WHITE

White color as
standard



COLOR CHANGING KIT CONTROLLER

Only in GLASS decoration

MODEL	COLOR-CHANGE

WOOD



Possibility of choosing color in WOOD decoration (no charge)



382



1532



1539



9575



1530

More color options available at page 108





STAINLESS STEEL PRODUCTS

- ▶ CUPBOARDS 116-120
- ▶ TABLES 121
- ▶ HEATED CUPBOARD 122
- ▶ FOOD WARMER WITH LAMPS 123
- ▶ STORAGE BIN / DRAWERS 124
- ▶ BUTCHER BLOCK TABLE / CUTLERY STAND 125
- ▶ FISH TABLE / CUPBOARD 126
- ▶ WALL CUPBOARD 127-128
- ▶ WATER COOLER 128
- ▶ CONTAINER TRAY TROLLEY 129
- ▶ RACKS 129-130
- ▶ HOOD / FILTERS 131-132
- ▶ SINK UNITS 133-144
- ▶ CUSTOM MADE CONSTRUCTIONS 145-146
- ▶ GN CONTAINERS 147
- ▶ BASINS 148
- ▶ CONSUMABLES 149-150

CUPBOARD
WITH SLIDING DOORS

E 120

INOX
304



- Stainless steel Exterior / Interior
- Height adjustable inox feet
- Strong manufacture
- Storage shelf
- Sliding doors

MODEL	E 100	E 120	E 140	E 160
External dimensions (WxDxH) cm.	100 x 70 x 85	120 x 70 x 85	140 x 70 x 85	160 x 70 x 85
Capacity Storage (L)	460	540	630	720
Doors	2	2	2	2
Shelves	1	1	1	1
Inox Feet (Pcs/Dimensions (H) cm.)	4 / 10 - 13	4 / 10 - 13	4 / 10 - 13	4 / 10 - 13
Net Weight (kg)	40	48	57	65
Volume (m³)	0,6	0,71	0,89	0,95

MODEL	E 180	E 200	E 220	E 240
External dimensions (WxDxH) cm.	180 x 70 x 85	200 x 70 x 85	220 x 70 x 85	240 x 70 x 85
Capacity Storage (L)	810	910	1000	1090
Doors	2	4	4	4
Shelves	1	1	1	1
Inox Feet (Pcs/Dimensions (H) cm.)	4 / 10 - 13	6 / 10 - 13	6 / 10 - 13	6 / 10 - 13
Net Weight (kg)	69	77	85	94
Volume (m³)	1,13	1,2	1,31	1,42

INOX
304

EO 120



- Stainless steel Exterior / Interior
- Height adjustable inox feet
- Strong manufacture
- Storage shelf
- Hinged doors

MODEL	EO 100	EO 120	EO 140	EO 160
External dimensions (WxDxH) cm.	100 x 70 x 85	120 x 70 x 85	140 x 70 x 85	160 x 70 x 85
Capacity Storage (L)	460	540	630	720
Doors	2	2	2	3
Shelves	1	1	1	1
Inox Feet (Pcs/Dimensions (H) cm.)	4 / 10 - 13	4 / 10 - 13	4 / 10 - 13	4 / 10 - 13
Net Weight (kg)	40	48	57	65
Volume (m³)	0,6	0,71	0,89	0,95

MODEL	EO 180	EO 200	EO 220	EO 240
External dimensions (WxDxH) cm.	180 x 70 x 85	200 x 70 x 85	220 x 70 x 85	240 x 70 x 85
Capacity Storage (L)	810	910	1000	1090
Doors	3	4	4	4
Shelves	1	1	1	1
Inox Feet (Pcs/Dimensions (H) cm.)	4 / 10 - 13	6 / 10 - 13	6 / 10 - 13	6 / 10 - 13
Net Weight (kg)	69	77	85	94
Volume (m³)	1,13	1,19	1,31	1,42

CUPBOARD WITH DRAWERS AND STORAGE BIN

ESA 100

INOX
304



CUPBOARD WITH DRAWERS AND STORAGE BIN

- Stainless steel Exterior / Interior
- Height adjustable Inox feet
- Stainless steel drawers
- Stainless steel storage bin

MODEL	ESA 100
External dimensions (WxDxH) cm.	100 x 70 x 85
Drawers (Pcs/Dimensions (WxDxY) cm.)	3 / 36 x 45 x 13
Storage Bin (Pcs/Dimensions (WxDxY) cm.)	1 / 45 x 40 x 62
Inox Feet (Pcs/Dimensions (H) cm.)	4 / 10 - 13
Net Weight (kg)	75
Volume (m³)	0,59

ES 50

INOX
304



CUPBOARD WITH DRAWERS

- Stainless steel Exterior / Interior
- Height adjustable inox feet
- Stainless steel drawers

MODEL	ES 50
External dimensions (WxDxH) cm.	50 x 70 x 85
Drawers (Pcs/Dimensions (WxDxY) cm.)	3 / 36 x 45 x 13
Inox Feet (Pcs/Dimensions (H) cm.)	4 / 10 - 13
Net Weight (kg)	35
Volume (m³)	0,23

INOX
304**EA 50****CUPBOARD WITH STORAGE BIN**

- Stainless steel Exterior / Interior
- Height adjustable Inox feet
- Stainless steel storage bin



MODEL	EA 50
External dimensions (WxDxH) cm.	50 x 70 x 85
Storage Bin (Pcs/Dimensions (WxDxY) cm.)	1 / 45 x 40 x 62
Inox Feet (Pcs/Dimensions (H) cm.)	4 / 10 - 13
Net Weight (kg)	29
Volume (m³)	0,23

INOX
304**EK 86****COFFEE MACHINE BASE**

- Stainless steel Exterior / Interior
- Strong manufacture
- Stainless steel drawers
- Internal bar



MODEL	EK 50	EK 86
External dimensions (WxDxH) cm.	50 x 50 x 23	86 x 50 x 23
Drawers (Pcs/Dimensions (WxDxY) cm.)	1 / 36 x 45 x 13	2 / 36 x 45 x 13
Internal bar	1	1
Net Weight (kg)	13	19
Volume (m³)	0,05	0,095

CUPBOARDS

EP 100



INOX
304

CUPBOARD WITH WALL CUPBOARD, DRAWERS AND STORAGE BIN

- Stainless steel Exterior / Interior
- Height adjustable inox feet
- Stainless steel drawers
- Stainless steel storage bin
- Wall cupboard with sliding glass doors

MODEL	EP 100
External dimensions (WxDxH) cm.	100 x 70 x 195
Drawers (Pcs/Dimensions (WxDxY) cm.)	3 / 36 x 45 x 13
Storage Bin (Pcs/Dimensions (WxDxY) cm.)	1 / 45 x 40 x 62
Wall cupboard (Dimensions (WxDxY) cm.)	100 x 30 x 70
Wall cupboard shelves	2
Wall cupboard doors	2 - Glass
Inox Feet (Pcs/Dimensions (H) cm.)	4 / 10 - 13
Net Weight (kg)	100
Volume (m³)	1,36

EE 120

INOX
304



CLOSET CUPBOARD

- Stainless steel Exterior / Interior
- Height adjustable Inox feet
- Strong manufacture
- Strong shelves

MODEL	EE 120	EE 140
External dimensions (WxDxH) cm.	120 x 70 x 200	140 x 70 x 200
Shelves	3	3
Inox Feet (Pcs/Dimensions (H) cm.)	4 / 10 - 13	4 / 10 - 13
Net Weight (kg)	85	107
Volume (m³)	1,68	2,24

INOX
304**TABLE**

- Stainless steel Exterior / Interior
- Height adjustable feet
- Strong manufacture
- Strong shelf

**T 140**

MODEL	T 100	T 120	T 140	T 160	T 180	T 200	T 220	T 240
Dimensions (WxDxH) cm.	100 x 70 x 85	120 x 70 x 85	140 x 70 x 85	160 x 70 x 85	180 x 70 x 85	200 x 70 x 85	220 x 70 x 85	240 x 70 x 85
Net Weight (kg)	29	35	40	48	52	70	78	85
Volume (m³)	0,59	0,71	0,83	0,95	1,07	1,19	1,3	1,42

INOX
304**TA 120****TABLE WITH HOLE FOR RUBBISH**

- Stainless steel Exterior / Interior
- Height adjustable inox feet
- Hole for rubbish
- Strong manufacture
- Strong shelf
- Place for storage bin



MONTEAO	TA 80	TA 120
Dimensions (WxDxH) cm.	80 x 70 x 85	120 x 70 x 85
Net Weight (kg)	21	31

The storage bin on wheels is not included in the prices

HEATED CUPBOARD

EH 140

INOX
304



- Stainless steel Exterior / Interior
- Height adjustable inox feet
- Indicative lamp service
- Resistance thermostat
- Heated storage with shelf



Controller, detail

EXTRA

EH 120 - EH 140
EH 160 - EH 180



WHEELS

FOOD WARMER WITH LAMPS

INOX
304

XD 1



- Stainless steel Exterior / Interior
- Lamps 250W
- Stainless steel GN container 1/1
- Lamp switch ON- OFF

FOOD WARMER WITH LAMPS

MODEL	XD 1
External dimensions (WxDxH) cm.	35 x 56 x 64
Heating Element (Pcs/ Input Power) (W)	2 x 250
Net Weight (kg)	5
Volume (m³)	0,12

HEATED CUPBOARD

MODEL	EH 120	EH 140	EH 160	EH 180
External dimensions (WxDxH) cm.	120 x 70 x 85	140 x 70 x 85	160 x 70 x 85	180 x 70 x 85
Capacity (L)	493	575	658	741
Temperature Range (°C)	+30 to +90	+30 to +90	+30 to +90	+30 to +90
Controller	Analog	Analog	Analog	Analog
Input Power (W)	2000	2500	3000	3500
Voltage / Frequency (V/Hz)	220 - 240 / 50	220 - 240 / 50	220 - 240 / 50	220 - 240 / 50
Doors	2	2	2	2
Inox Feet (Pcs/Dimensions (H) cm.)	4 / 10 -13	4 / 10 -13	4 / 10 -13	4 / 10 -13
Net Weight (kg)	63	80	90	100
Volume (m³)	0,71	0,89	0,95	1,13

STORAGE BINS - DRAWERS

AP 1



INOX
304

STORAGE BIN ON WHEELS

MODEL	AP 1
Dimensions (WxDxY) cm.	45 x 54 x 76
Net Weight (kg)	13
Capacity (L)	150

AM 1



INOX
304

TILT STORAGE BIN

MODEL	AM 1
Dimensions (WxDxY) cm.	45 x 40 x 62
Net Weight (kg)	8
Capacity (L)	88

SE 1



INOX
304

CUPBOARD / TABLE DRAWER

MODEL	SE 1
Dimensions (WxDxY) cm.	36 x 45 x 13
Net Weight (kg)	4
Volume (m³)	0,02

BUTCHER BLOCK TABLE / CUTLERY & BREAD DISPENSER UNIT

INOX
304

KP 50

BUTCHER BLOCK TABLE

- Stainless steel Exterior / Interior
- Height adjustable inox feet
- Strong manufacture
- H.A.C.C.P. polyethylene butcher block 20mm
- Color choice white / red



White color



MODEL	KP 40	KP 50	KP 60	KP 70
Dimensions (WxDxY) cm.	40 x 40 x 85	50 x 50 x 85	60 x 60 x 85	70 x 70 x 85
Net Weight (kg)	15	20	25	30
Volume (m ³)	0,13	0,21	0,30	0,41

INOX
304

K 75

CUTLERY & BREAD DISPENSER UNIT

- Stainless steel Exterior / Interior
- Plastic case for cutlery
- Bread case
- Stainless steel shelves



MODEL	K 75
Dimensions (WxDxY) cm.	75 x 68 x 150
Stainless steel shelves	2
Net Weight (kg)	20
Volume (m ³)	0,86

FISH TABLE / CUPBOARD

TF 120

INOX
304



FISH TABLE WITH SLOPING WORKTOP

- Stainless steel Exterior / Interior
- Height adjustable feet
- Sloping worktop
- Strong manufacture
- Drainage

MODEL	TF 120	TF 160	TF 200
Dimensions (WxDxH) cm.	120 x 120 x 90-105	160 x 120 x 90-105	200 x 120 x 90-105
Net Weight (kg)	40	50	60
Volume (m³)	1,5	2	2,52

EF 120

INOX
304



FISH CUPBOARD

- Stainless steel Exterior / Interior
- Height adjustable inox feet
- Sloping worktop
- Strong manufacture
- Drainage

MODEL	EF 120	EF 160	EF 200
External dimensions (WxDxH) cm.	120 x 120 x 90-105	160 x 120 x 90-105	200 x 120 x 90-105
Doors	2	2	4
Shelves	1	1	1
Inox Feet (Pcs/Dimensions (H) cm.)	4 / 10 - 13	4 / 10 - 13	6 / 10 - 13
Net Weight (kg)	82	92	100
Volume (m³)	1,50	2,02	2,52

INOX
304

PK 120

WITH GLASS SLIDING DOORS

- Stainless steel Exterior / Interior
- Strong stainless steel shelves
- Aluminium guide with roller
- Glass sliding doors



MODEL	PK 120	PK 140	PK 160	PK 180	PK 240
Dimensions (WxDxY) cm.	120 x 30 x 70	140 x 30 x 70	160 x 30 x 70	180 x 30 x 70	240 x 30 x 70
Shelves	2	2	2	2	2
Glass sliding doors	2	2	2	2	4
Net Weight (kg)	29	37	45	50	63
Volume (m³)	0,25	0,31	0,33	0,4	0,5

INOX
304

PI 120

WITH INOX SLIDING DOORS

- Stainless steel Exterior / Interior
- Strong stainless steel shelves
- Inox sliding doors




MODEL	PI 120	PI 140	PI 160	PI 180	PI 240
Dimensions (WxDxY) cm.	120 x 35 x 70	140 x 35 x 70	160 x 35 x 70	180 x 35 x 70	240 x 35 x 70
Shelves	2	2	2	2	2
Inox sliding doors	2	2	2	2	4
Net Weight (kg)	35	40	45	51	64
Volume (m³)	0,29	0,34	0,39	0,46	0,8

OPEN WALL CUPBOARD - ELECTRIC WATER COOLER

P 120

INOX
304

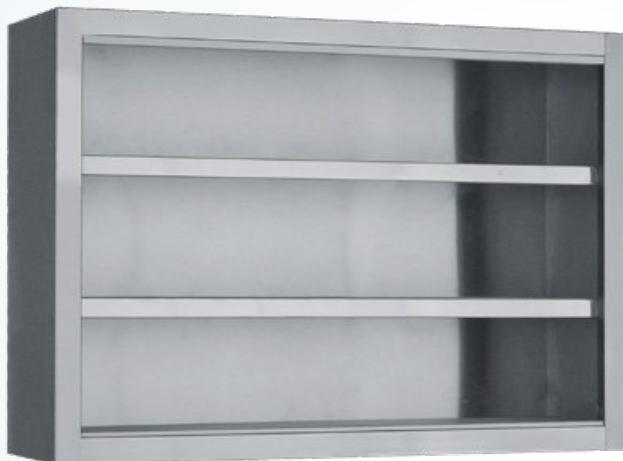

CUPBOARD WITHOUT DOORS

- Stainless steel Exterior / Interior
- Strong manufacture
- Strong stainless steel shelves

MODEL	P 120	P 140	P 160	P 180	P 240
Dimensions (WxDxH) cm.	120 x 30 x 70	140 x 30 x 70	160 x 30 x 70	180 x 30 x 70	240 x 30 x 70
Shelves	2	2	2	2	2
Net Weight (kg)	26	34	40	45	57
Volume (m³)	0,25	0,31	0,33	0,4	0,5

HD 250

INOX
304



WATER COOLER

- Professional type water cooler
- Up to 250 glass of water efficiency
- Water temperature controller
- Strong manufacture

MODEL	HD 250
External dimensions (WxDxH) cm.	37 x 44 x 45
Efficiency (L/h)	55
Input Power (W)	350
Compressor (HP)	3/8
Refrigerant	R 290
Net Weight (kg)	25
Volume (m³)	0,07

CONTAINER TRAY TROLLEY - SHELVING UNIT

INOX
304

KR 1/1

CONTAINER TRAY TROLLEY

- Stainless steel tube
- Strong manufacture
- Wheels with brake



MODEL	KR 1/1	KR 2/1
Dimensions (WxDxY) cm.	40,5 x 56 x 180	73 x 56 x 180
Places	16	16
Net Weight (kg)	32	40
Volume (m³)	0,41	0,74

INOX
304

RD 120

SHELVING UNIT

- Stainless steel
- Strong manufacture
- Height adjustable feet
- Dismountable for easy transport
- Adjustable shelves per 10cm possibility of extra shelf
- Appropriate for cold room



MODEL	RD 100	RD 120	RD 150	RD 180
Dimensions (WxDxY) cm.	100 x 60 x 180	120 x 60 x 180	150 x 60 x 180	180 x 60 x 180
Shelves	4	4	4	4
Net Weight (kg)	35	37	50	54
Volume (m³)	1	1,2	1,6	1,9

WALL MOUNTED RACK



SHELF

MODEL	R
Dimensions (WxD) cm.	70 x 35



BRACKET

MODEL	RB
Dimensions (W) cm.	40

WALL SHELF

- Stainless steel
- Strong manufacture
- Height / Slope adjustable shelves
- Backsplash



COLUMN

MODEL	RK
Dimensions (H) cm.	67



UTENSILS HANGING KIT

MODEL	RS1

INOX
304**FT 150****WALL MOUNTED HOOD**

- Stainless steel Exterior / Interior
- Filter socket
- Groove for oil removal




MODEL	FT 150	FT 200	FT 250	FT 300
Dimensions (WxDxY) cm.	150 x 90 x 60	200 x 90 x 60	250 x 90 x 60	300 x 90 x 60
Net Weight (kg)	34	42	52	60
Volume (m³)	0,81	1,08	1,35	1,62

Filters are not included in the prices

INOX
304**FS 150****SNACK HOOD**

- Stainless steel Exterior / Interior
- Filter socket
- Groove for oil removal

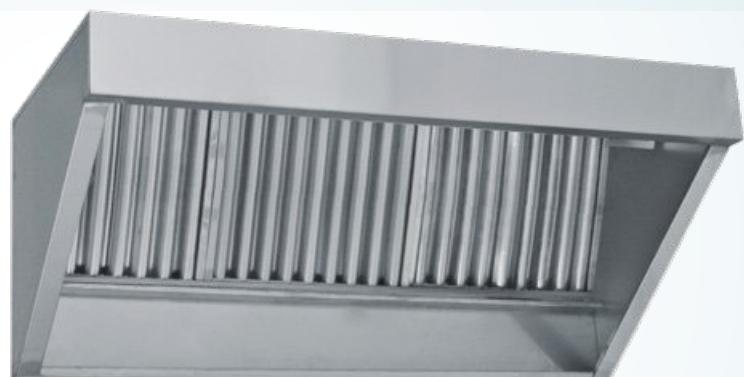

MODEL	FS 100	FS 150	FS 200	FS 250
Dimensions (WxDxY) cm.	100 x 75 x 60	150 x 75 x 60	200 x 75 x 60	250 x 75 x 60
Net Weight (kg)	23,6	30	37,8	44,7
Volume (m³)	0,25	0,38	0,5	0,63

Filters are not included in the prices

CEILING-MOUNTED HOOD

FK 150

INOX
304



CEILING-MOUNTED HOOD

- Stainless steel Exterior / Interior
- Filters socket
- Groove for oil removal
- Hanging socket

MODEL	FK 150	FK 200	FK 250	FK 300
Dimensions (WxDxY) cm.	150 x 120 x 60	200 x 120 x 60	250 x 120 x 60	300 x 120 x 60
Net Weight (kg)	34	42	52	60
Volume (m³)	0,99	1,32	1,65	1,98

Filters are not included in the prices

FF 00

INOX
304



EXHAUST HOOD FILTRES

- Stainless steel Exterior / Interior

MODEL	FF 00
Dimensions (WxD) cm.	49 x 50

INOX
304**LP 120**

SINK UNIT FOR DISHWASHER

- Stainless steel Exterior / Interior
- Place for professional dishwasher
- Hole for rubbish
- Place for storage bin
- Basin's dimension 50 x 40cm.



MODEL	LP 120
Dimensions (WxDxY) cm.	120 x 80 x 82
Basin (Pcs/Dimensions (WxD) cm.)	1 / 50 x 40
Net Weight (kg)	17
Volume (m³)	0,78

INOX
304**LP 50**

SINK UNIT WITH PEDAL

- Stainless steel Exterior / Interior
- Valve for hot / cold water
- Inox fountain
- Drainage system



MODEL	LP 50
Dimensions (WxDxY) cm.	45 x 40 x 85
Basin (Pcs)	1
Net Weight (kg)	13
Volume (m³)	0,18

HAND WASHING STATION

INOX
304

LPDX 45



- Stainless steel 304 Exterior / Interior
- Stainless steel water tap
- Drainage system
- Foot Valve for hot / cold water
- Dispenser for soap
- Dispenser for paper towels
- Stainless steel removable garbage bin

Hand washing station made of stainless steel AISI 304 pedal operated, equipped with paper and soap dispenser, with rubbish bin.

MODEL	LPDX 45
External dimensions (WxDxH) cm.	45 x 46 x 155
Basin	1
Net Weight (kg)	21
Volume (m ³)	3,2

SINK ON CUPBOARD

WITH 1 BASIN 50x50x30 or 40x40x25 or 34x37x15 cm.

LK1-120

INOX
304



- Stainless steel Exterior / Interior
- Sliding doors
- Stainless steel basins
- Height adjustable inox feet
- Strong manufacture
- Without back
- Inox draining top

WITH 1 BASIN 50x50x30 or 40x40x25 cm.

MODEL	LK1-70	LK1-120	LK1-140
External dimensions (WxDxH) cm.	70 x 70 x 85	120 x 70 x 85	140 x 70 x 85
Basin (Pcs)	1	1	1
Net Weight (kg)	28	47	52
Volume (m³)	0,41	0,71	0,83

WITH 1 BASIN 34x37x15 cm.

MODEL	LKE1-60	LKE1-100	LKE1-140
External dimensions (WxDxH) cm.	60 x 60 x 85	100 x 60 x 85	140 x 60 x 85
Basin (Pcs)	1	1	1
Net Weight (kg)	18	29	38
Volume (m³)	0,3	0,51	1,71

INOX
304

LA1-120



- Stainless steel Exterior / Interior
- Stainless steel basins
- Height adjustable feet
- Strong manufacture
- Strong shelf
- Inox draining top

WITH 1 BASIN 50x50x30 or 40x40x25 cm.

MODEL	LA1-70	LA1-120	LA1-140
External dimensions (WxDxH) cm.	70 x 70 x 85	120 x 70 x 85	140 x 70 x 85
Basin (Pcs)	1	1	1
Net Weight (kg)	24	37	43
Volume (m ³)	0,41	0,71	0,83

WITH 1 BASIN 34x37x15 cm.

MODEL	LAE1-60	LAE1-100	LAE1-140
External dimensions (WxDxH) cm.	60 x 60 x 85	100 x 60 x 85	140 x 60 x 85
Basin (Pcs)	1	1	1
Net Weight (kg)	15	26	36
Volume (m ³)	0,83	1,13	1,42

SINK ON CUPBOARD

WITH 2 BASINS 50x50x30 or 40x40x25 or 34x37x15 cm.

LK2-140

INOX
304



- Stainless steel Exterior / Interior
- Sliding doors
- Stainless steel basins
- Height adjustable inox feet
- Strong manufacture
- Without back
- Inox draining top

WITH 2 BASINS 50x50x30 or 40x40x25 cm.

MODEL	LK2-140	LK2-180	LK2-240
External dimensions (WxDxH) cm.	140 x 70 x 85	180 x 70 x 85	240 x 70 x 85
Basin (Pcs)	2	2	2
Net Weight (kg)	56	67	85
Volume (m ³)	0,71	0,81	1,42

WITH 2 BASINS 34x37x15 cm.

MODEL	LKE2-100	LKE2-120	LKE2-140	LKE2-160
External dimensions (WxDxH) cm.	100 x 60 x 85	120 x 60 x 85	140 x 60 x 85	160 x 60 x 85
Basin (Pcs)	2	2	2	2
Net Weight (kg)	32	36	43	53
Volume (m ³)	0,51	0,61	0,71	0,81

SINK UNIT

WITH 2 BASINS 50x50x30 or 40x40x25 or 34x37x15 cm.

INOX
304

LA2-140



- Stainless steel Exterior / Interior
- Stainless steel basins
- Height adjustable feet
- Strong manufacture
- Strong shelf
- Inox draining top

WITH 2 BASINS 50x50x30 or 40x40x25 cm.

MODEL	LA2-140	LA2-180	LA2-240
External dimensions (WxDxH) cm.	140 x 70 x 85	180 x 70 x 85	240 x 70 x 85
Basin (Pcs)	2	2	2
Net Weight (kg)	45	56	70
Volume (m ³)	0,83	1,13	1,42

WITH 2 BASINS 34x37x15 cm.

MODEL	LAE2-100	LAE2-120	LAE2-140	LAE2-160
External dimensions (WxDxH) cm.	100 x 60 x 85	120 x 60 x 85	140 x 60 x 85	160 x 60 x 85
Basin (Pcs)	2	2	2	2
Net Weight (kg)	30	34	41	51
Volume (m ³)	0,51	0,61	0,71	0,81

SINK ON CUPBOARD

WITH 3 BASINS 50x50x30 or 40x40x25 cm.

LK3-180

INOX
304



- Stainless steel Exterior / Interior
- Sliding doors
- Stainless steel basins
- Height adjustable inox feet
- Strong manufacture
- Without back
- Inox draining top

MODEL	LK3-180	LK3-240
External dimensions (WxDxH) cm.	180 x 70 x 85	240 x 70 x 85
Basin (Pcs)	3	3
Net Weight (kg)	70	89
Volume (m ³)	1,13	1,42

SINK UNIT

WITH 3 BASINS 50x50x30 or 40x40x25 cm.

INOX
304

LA3-180



- Stainless steel Exterior / Interior
- Stainless steel basins
- Height adjustable feet
- Strong manufacture
- Strong shelf
- Inox draining top

MODEL	LA3-180	LA3-240
External dimensions (WxDxH) cm.	180 x 70 x 85	240 x 70 x 85
Basin (Pcs)	3	3
Net Weight (kg)	58	69
Volume (m ³)	1,13	1,42

SINK ON CUPBOARD

WITH 1 BASIN 95x51x35 cm.

LK96-120

INOX
304



- Stainless steel Exterior / Interior
- Sliding doors
- Stainless steel basins
- Height adjustable inox feet
- Strong manufacture
- Without back
- Inox draining top

MODEL	LK96-120	LK96-160	LK96-180
External dimensions (WxDxH) cm.	120 x 70 x 85	160 x 70 x 85	180 x 70 x 85
Basin (Pcs)	1	1	1
Net Weight (kg)	47	53	67
Volume (m³)	0,71	0,951	1,07

SINK UNIT

WITH 1 BASIN 96x51x35 cm.

INOX
304

LA96-120



- Stainless steel Exterior / Interior
- Stainless steel basins
- Height adjustable feet
- Strong manufacture
- Strong shelf
- Inox draining top

MODEL	LA96-120	LA96-160	LA96-180
External dimensions (WxDxH) cm.	120 x 70 x 85	160 x 70 x 85	180 x 70 x 85
Basin (Pcs)	1	1	1
Net Weight (kg)	37	51	56
Volume (m ³)	0,71	0,95	1,07

SINK ON CUPBOARD

WITH 1 BASIN 126x51x35 cm.

LK126-150

INOX
304



- Stainless steel Exterior / Interior
- Sliding doors
- Stainless steel basins
- Height adjustable inox feet
- Strong manufacture
- Without back
- Inox draining top

MODEL	LK126-150	LK126-180
External dimensions (WxDxH) cm.	150 x 70 x 85	180 x 70 x 85
Basin (Pcs)	1	1
Net Weight (kg)	60	67
Volume (m ³)	0,89	1,07

SINK UNIT
WITH 1 BASIN 126x51x35 cm.

INOX
304

LA126-150



- Stainless steel Exterior / Interior
- Stainless steel basins
- Height adjustable feet
- Strong manufacture
- Strong shelf
- Inox draining top

MODEL	LA126-150	LA126-180
External dimensions (WxDxH) cm.	150 x 70 x 85	180 x 70 x 85
Basin (Pcs)	1	1
Net Weight (kg)	50	56
Volume (m ³)	0,89	1,07

CUSTOM MADE CONSTRUCTIONS



CUSTOM MADE CONSTRUCTIONS

Adjust the products to the needs of the space and the needs of each business!!!

Our company, using the experience and the technical knowledge of many years, commit to carry through even with the hardest works. By developing a department of experts, in the field of the tailor made constructions, we offer special constructions with the well-known BAMBAS frost quality in unbeatable prices.

For any request or order of custom made products, we need the following :


1. A linear drawing of the product with the dimensions.
2. Contact by phone for details clarification.

Finally, only by scanning the following QR code with your mobile phone, you can visit our database of tailor made constructions, that we have already produced and choose the one that is suitable for your needs. We update frequently this file with new designs.




STAINLESS STEEL GASTRONORM CONTAINERS

INOX
304




GN 1/1

MODEL	GN 1/1 × 150	GN 1/1 × 100	GN 1/1 × 65	GN 1/1 × 25




GN 1/2

MODEL	GN 1/2 × 150	GN 1/2 × 100	GN 1/2 × 65




GN 1/3

MODEL	GN 1/3 × 100	GN 1/3 × 65



GN 1/4

MODEL	GN 1/4 × 65



GN 1/6

MODEL	GN 1/6 × 65


Στις τιμές δε συμπεριλαμβάνεται ο Φ.Π.Α.

INOX
304


MODEL	B 34
--------------	------



150




250



MODEL	B 40
--------------	------




300



MODEL	B 50
--------------	------




350




MODEL	B 96
--------------	------



350



MODEL	B 126
--------------	-------



130



MODEL	B 26
--------------	------



180



MODEL	B 30
--------------	------

CONSUMABLES



DIXELL FREEZER
CONTROLLER

PRICE



DIXELL CONTROLLER
REFRIGERATOR

PRICE



CAREL CONTROLLER

REFRIGERATOR

FREEZER

TIMH



LED LIGHTING

PRICE




FAN MOTOR 10W

PRICE



HEATING ELEMENT

PRICE

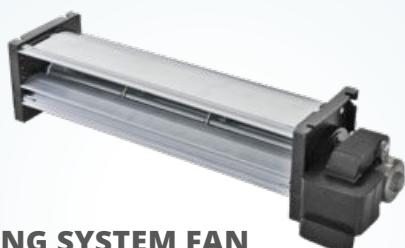

COOLING SYSTEM FAN

MODEL

BIG 103450

MEDIUM 103401

External dimensions
(W) cm.

36,5

35,5

PRICE



DOOR GASKET

Dimensions cm. 49 x 64 42,5 x 64 141 x 62 164 x 63

PRICE

Στις τιμές δε συμπεριλαμβάνεται ο Φ.Π.Α.

**INOX LEGS**

PRICE

**WHEELS**

WITH BRAKE WITHOUT BRAKE

PRICE

**ELBOW FOR HINGE (SQUARE)**

PRICE

**LOW BRACKET**

PRICE

**AUTOMATIC RETURN HINGE**

PRICE

**SUPPORT PAIRS FOR GN / SHELF**

FOR CABINET FOR COUNTER

PRICE

**EVAPORATOR WITH ANTI-CORROSIVE PROTECTION**

PRICE

**VALVE FOR HOT / COLD WATER**

PRICE



NOTES

NOTES

The manufacturer reserves the right to make changes on design, specification, terms and conditions governing new products, sales, and prices. This catalogue cancels all previous and the prices are ex-works and delivery costs are not included. Prices are subject to alteration at any time without notice or obligation. While every effort is made to ensure accuracy, no responsibility can be accepted by BAMBAS FROST or any of its Authorised Agents for errors, omissions or alterations.



BAMBAS FROST FACILITIES



3rd km Kozani - Thessaloniki RD
Industrial Area Kasla
Kozani 50100, Greece

Tel: (+30) 24610 29059, 38898
Fax: (+30) 24610 29884

✉ sales@bambasfrost.gr

www.bambasfrost.com



Follow us on Facebook

Bambas Frost

Subscribe to our You Tube channel

Bambas Frost

