


Admiral Xtreme™

PTA Catheter OTW 0.035"

Cross lesions with confidence

Technical specifications

Catheter design	Over the wire (OTW)
Balloon coating	LFC hydrophilic
Balloon marker	2 swagged (zero profile) platinum iridium
Shaft diameter	5 F-5.3 F
Usable shaft lengths	80 cm, 130 cm, and 150 cm
Introducer sheath compatibility	5 F, 6 F, and 7 F
Guidewire compatibility	0.035"

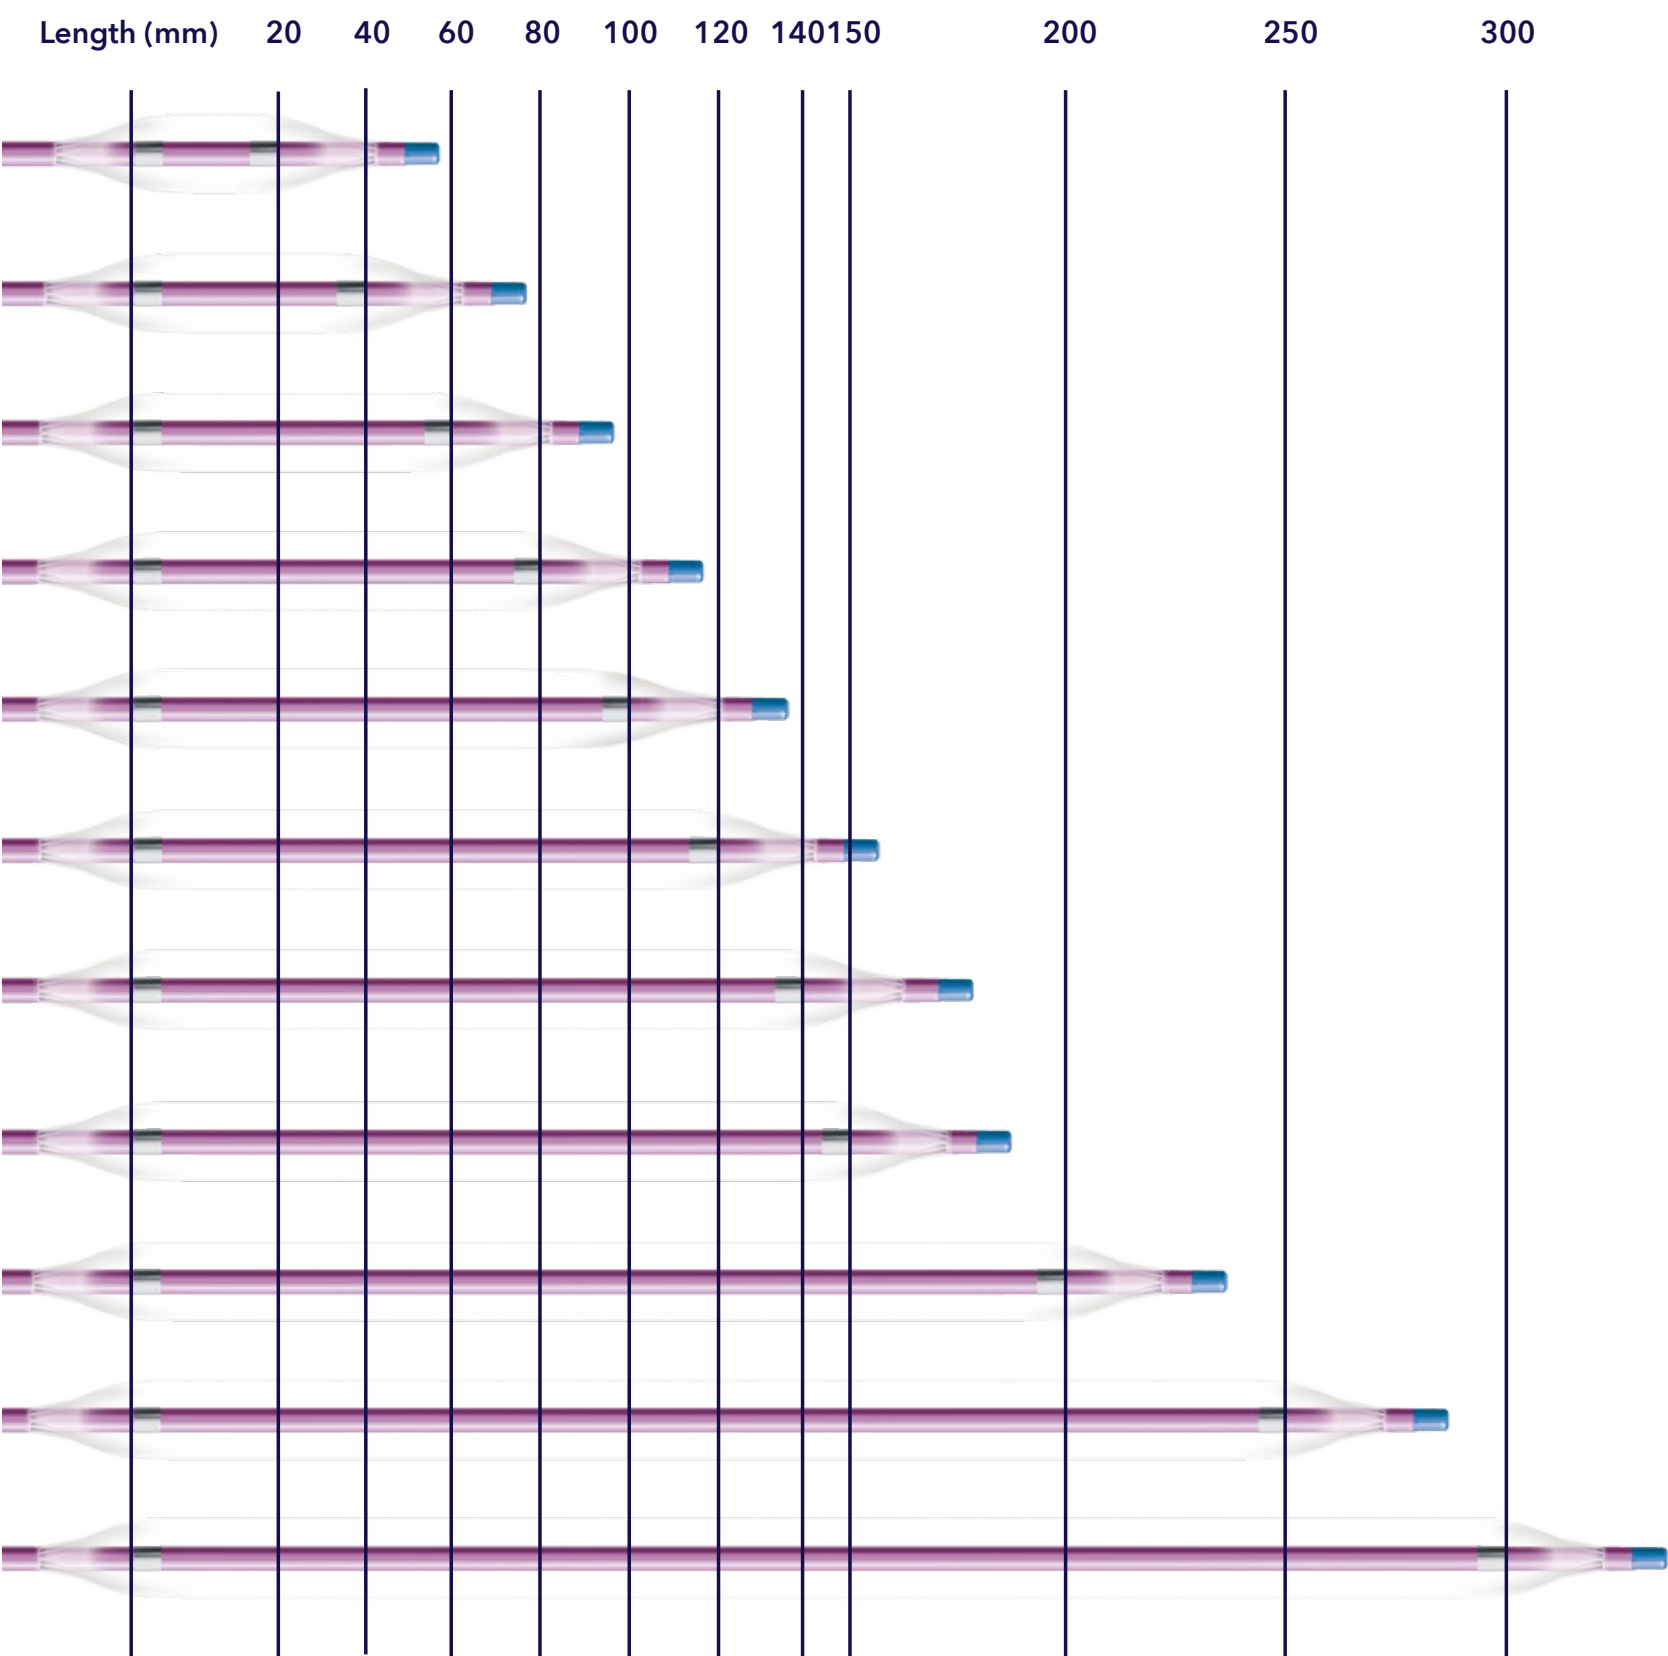

Admiral Xtreme™

PTA Catheter OTW 0.035"

Home

Drug-coated
Balloons

Stent Systems

PTA Catheters

Directional
Atherectomy

Embolic Protection
Devices

Crossing
Catheters

Thrombus
Management

Guidewires

Snares

Ellipsys™

Order information

Ref no. usable length 80 cm	Ref no. usable length 130 cm	Ref no. usable length 150 cm	Balloon Ø mm	Balloon length	Recom. introducer sheath (F)	RBP (bar)
SBI030020080	SBI030020130		3	20	5	18
SBI030040080	SBI030040130		3	40	5	18
SBI030080080	SBI030080130		3	80	5	18
SBI030100080	SBI030100130		3	100	5	18
SBI030120080	SBI030120130		3	120	5	18
SBI040020080	SBI040020130	SBI040020150	4	20	5	18
SBI040040080	SBI040040130	SBI040040150	4	40	5	18
SBI040060080	SBI040060130	SBI040060150	4	60	5	18
SBI040080080	SBI040080130	SBI040080150	4	80	5	18
SBI040100080	SBI040100130	SBI040100150	4	100	5	18
SBI040120080	SBI040120130	SBI040120150	4	120	5	18
SBI040150080	SBI040150130	SBI040150150	4	150	5	14
SBI040200080	SBI040200130	SBI040200150	4	200	5	14
SBI040250080	SBI040250130		4	250	5	14
SBI040300080	SBI040300130		4	300	5	14
SBI050020080	SBI050020130	SBI050020150	5	20	5	17
SBI050040080	SBI050040130	SBI050040150	5	40	5	17
SBI050060080	SBI050060130	SBI050060150	5	60	5	17
SBI050080080	SBI050080130	SBI050080150	5	80	5	15
SBI050100080	SBI050100130	SBI050100150	5	100	5	15
SBI050120080	SBI050120130	SBI050120150	5	120	5	15
SBI050150080	SBI050150130	SBI050150150	5	150	5	14
SBI050200080	SBI050200130	SBI050200150	5	200	5	14
SBI050250080	SBI050250130		5	250	5	14
SBI050300080L	SBI050300130L		5	300	5	14
SBI060020080	SBI060020130	SBI060020150	6	20	5	17
SBI060040080	SBI060040130	SBI060040150	6	40	5	17
SBI060060080	SBI060060130	SBI060060150	6	60	5	17

Ref no. usable length 80 cm	Ref no. usable length 130 cm	Ref no. usable length 150 cm	Balloon Ø mm	Balloon length	Recom. introducer sheath (F)	RBP (bar)
SBI060080080	SBI060080130	SBI060080150	6	80	5	15
SBI060100080	SBI060100130	SBI060100150	6	100	5	15
SBI060120080	SBI060120130	SBI060120150	6	120	5	15
SBI060150080	SBI060150130	SBI060150150	6	150	5	12
SBI060200080L	SBI060200130L	SBI060200150	6	200	5	12
SBI060250080L	SBI060250130L		6	250	5	12
SBI060300080L	SBI060300130L		6	300	5	12
SBI070020080	SBI070020130	SBI070020150	7	20	5	16
SBI070040080	SBI070040130	SBI070040150	7	40	5	16
SBI070060080	SBI070060130	SBI070060150	7	60	5	14
SBI070080080	SBI070080130	SBI070080150	7	80	5	14
SBI070100080	SBI070100130	SBI070100150	7	100	5	12
SBI070120080L	SBI070120130L	SBI070120150	7	120	5	12
SBI070150080L	SBI070150130L	SBI070150150	7	150	5	12
SBI070200080L	SBI070200130L	SBI070200150	7	200	5	12
SBI070250080	SBI070250130		7	250	6	12
SBI080020080	SBI080020130		8	20	6	14
SBI080040080	SBI080040130		8	40	6	14
SBI080060080	SBI080060130		8	60	6	11
SBI080080080	SBI080080130		8	80	6	11
SBI090020080	SBI090020130		9	20	6	14
SBI090040080	SBI090040130		9	40	6	14
SBI090060080	SBI090060130		9	60	6	11
SBI090080080	SBI090080130		9	80	6	11
SBI100020080	SBI100020130		10	20	6	11
SBI100040080	SBI100040130		10	40	6	11
SBI120020080	SBI120020130		12	20	7	11
SBI120040080	SBI120040130		12	40	7	11