


# PRODUCT DATASHEET

## ECO CLASS AREA SPD 30 W 4000 K GRAY

ECO CLASS AREALIGHTING SPD Gen 2 | Streetlighting luminaires

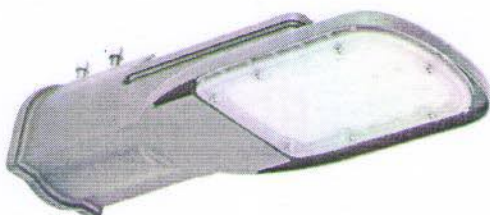

### AREAS OF APPLICATION

- Road lighting
- Streets
- Car parks
- Area lighting

### PRODUCT BENEFITS

- Energy savings thanks to high system efficacy: up to 120 lm/W
- Low maintenance and operation costs due to long lifetime of LED
- 5 years guarantee

### PRODUCT FEATURES

- Available with color temperature: 2,700 K, 3,000 K, 4,000 K, 6,500 K
- Lifetime (L70/B50): up to 50,000 h
- Type of protection: IP66
- Impact resistance: IK08
- Operating temperature range at  $t_a$ : -35...50 °C
- Robust die-cast aluminum housing
- Surge protection: up to 10 kV (L-N)
- Suitable for spigot diameter of 42 mm, 48 mm and 60 mm



## TECHNICAL DATA

### Electrical data

Nominal wattage	30.00 W
Operating mode	Mains voltage
Nominal voltage	100...240 V
Mains frequency	50/60 Hz
Power factor $\lambda$	> 0.90
Max. no. of lum. on circuit break. B16 A	16
Max. no. of lum. on circuit break. C10 A	15
Max. no. of lum. on circuit break. C16 A	24

### Photometrical data

Color temperature	4000 K
Color rendering index Ra	>80
Light color (designation)	Cool White
Luminous flux	3600 lm
Luminous efficacy	120 lm/W
Standard deviation of color matching	≤5 sdcn

### Light technical data

Beam angle	135 ° x 75 °
------------	--------------

### Dimensions & weight

Length	329.0 mm
Width	121.0 mm
Height	83.0 mm
Product weight	1051.00 g

### Colors & materials

Product color	Gray
Housing color	Gray
Body material	Aluminum
Cover material	Polycarbonate (PC)

### Temperatures & operating conditions

Ambient temperature range  $-30...+50\text{ }^{\circ}\text{C}$

Lifespan

Number of switching cycles	100000
Lifespan L70/B50 at 25 °C	50000 h



## Additional product data

Mounting type	Suspended
Mounting location	Pole

## Capabilities

Dimmable	No
Type of connection	Cable, 3-pole
LED module replaceable	Not replaceable

## Certificates &amp; standards

Type of protection	IP66
Protection class	I
Protection class IK (shock resistance)	IK08
Photobio. safety group acc. to EN62471	RG 1
Standards	CE/ROHS/REACH

## Logistical data

Temperature range at storage	-35...+70 °C
------------------------------	--------------

## LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075425095	Folding carton box 1	368 mm x 117 mm x 170 mm	1212.00 g	7.32 dm <sup>3</sup>
4058075425101	Shipping carton box 10	600 mm x 380 mm x 355 mm	12720.00 g	80.94 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

## REFERENCES / LINKS

For Guarantee see

[www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

## DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

