

DECLARAȚIE DE CONFORMITATE



SCHRÉDER ROMANIA S.R.L., cu sediul în Cluj - Napoca, str. Corneliu Coposu, nr. 167A, Jud. Cluj, România, înregistrată la Registrul Comerțului cu nr. J12/1759/1998, membră a SCHRÉDER GROUP, în calitate de furnizori de aparate de iluminat marca SCHRÉDER

Declarăm pe propria răspundere că aparatul de iluminat: **VOLTANA 0**

Versiune: max. 8 LED-uri

Clasă electrică: I sau II

Balast: electronic

Tensiune nominală: 230V / 50Hz

Caracteristici: Max. 1000mA

Etanșeitate compartiment optic: IP 66

Etanșeitate compartiment aparataj: IP 66

Cu condiția ca acesta să fie instalat, întreținut și utilizat în conformitate cu standardele de instalare și instrucțiunile producătorului. Este în conformitate cu următoarele directive sau standarde:

- EN 60598-1 (2015)
- EN 60598-2-1 (1979)
- EN 60598-2-3 (2003 + A1 2011)
- EN 61547 (2009)
- EN 61347 (2015)
- EN 55015 (2013)
- EN 61000-3-2 (2014) & 3-3 (2013)
- EN 62471 (2008)
- EN 62493 (2010)
- Directiva 2014/30/EU
- Directiva 2014/35/EU
- Directiva 2009/125/EC
- Directiva 2012/19/EU
- Directiva 2003/108/EC
- Directiva RoHS 2011/65/EU (RoHS 2)
- R.D. 1890/2008, 14 Noiembrie
- R.D. 154/1.995, 3 Februarie
- R.D. 842/2002, 2 August

SCHRÉDER ROMANIA S.R.L.
Director General,

Alexandru SIRCA

Eliberat,
Martie 2019, Cluj-Napoca

Lumen maintenance report

LED information


LED type	LH351C
LED current	1000 mA
Ts	55°C
Description	SLED-19-031

Projection data

Test duration	10000 hrs	α	5.811E-007
Time used for projection	5000 to 10000hrs	β	0.987

L (%)	Time (kHrs)
80.0	362
87.9	200
90.0	159
93.2	100

Projection graphic

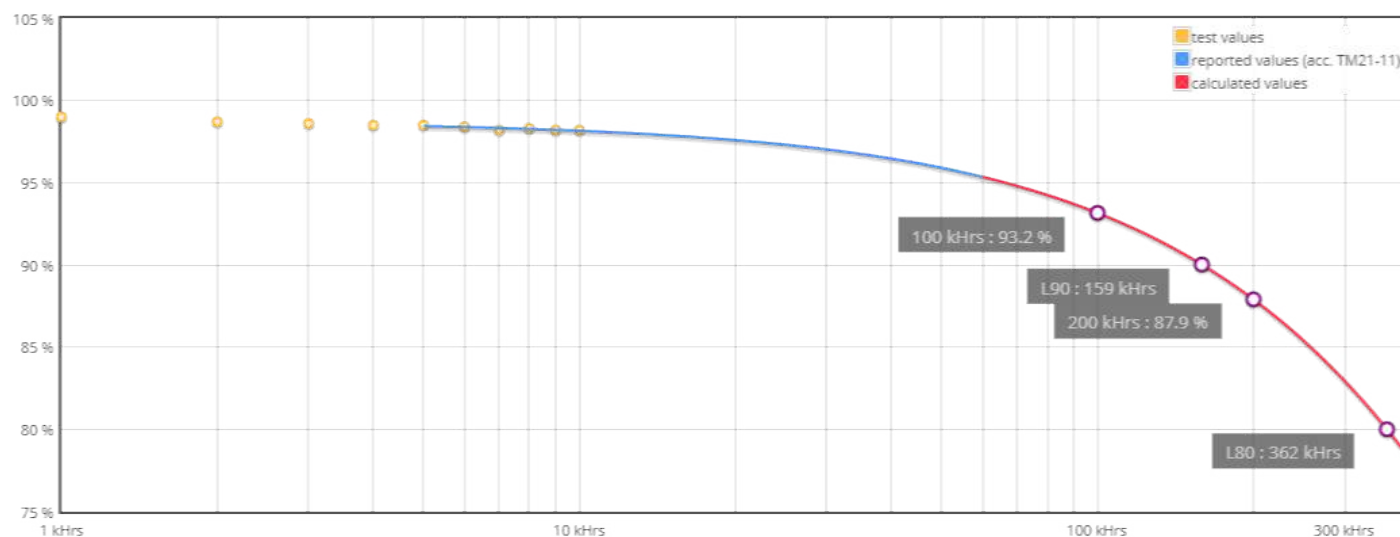

LxB50 results according to LM-80 and TM-21-11 procedures and norms.

LxBy results derived from LxB50 according to IEC 62717 Annex C.

LED Flux measurement

FORM-L-41 ED1 REV 2

Date : **16-01-19**

Operator : **FCE**

Filename : **2019_52.xml**



226 - TEST

NBN EN ISO/IEC 17025 : 2005

LEDs

Trademark : **Samsung**

Entry number : **39R004-2**

Type : **LH351C**

Power (Catalogue) : **0,00** W

BIN Description : **40-70M-4-TB-RB**

Flux : **0** lm/LED

Part number : **Unknown**

Color or CCT (Theoretical) : **NW**

Number of LEDs : **6**

Lenses

Trademark : **None**

Type : **None**


Power & Print

Type : **DELTA SM400-AR-4**

Print description : **00-71-626 A - Voltana 0**


Active ☐

Picture



Sphere photometric measurement

Maximum flux : **1157** lumens

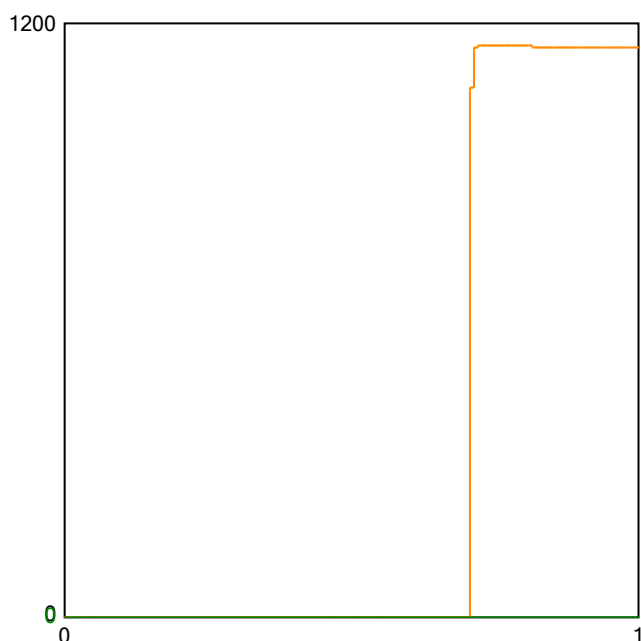

Operating condition

Position in sphere :



Ambient sphere T ° : **24,6**

Electrical measurement

● Secondary electrical measurement

Voltage : **16,93** V

Current : **0,350** A

Power : **5,92** Watt

→ LEDs light efficiency at 25° :

195,4 lm/W

192,9 lm/Led

● Primary electrical measurement

Voltage : **N/A** V

Current : **N/A** A

Power : **N/A** Watt

Cos φ : **N/A**

→ Driver losses : **N/A** %

→ LEDS & Driver light efficiency :

N/A lm/W

Description :

Flux @25°/350mA - pcb Voltana 0 - 6 Samsung LH351C - pcb N°2

Comment :

FORM-L-41 ED1 REV 2



226 - TEST

Approved by :

LED 2019/52 2/3

Colorimetry

[illegible]

RTECH-PHOTOMETRY LABORATORY

Testreport : Measurement of luminous intensity distribution related to the standard
NBN-EN 13032-1; NBN-EN 13032-4; CIE 121-1996; CIE S 025/E; IES LM-79-08 and procedures PT-P-01
and PT-P-02
rue de Mons, 3 B-4000 LIEGE - Tel : 04/224.71.40 - Fax : 04/224.25.90
Measurement for Schröder group.


LED

Origin TUNGSRAM-Schröder Zrt. Hungary	Production TUNGSRAM-Schröder Zrt. Hungary	Luminaire VOLTANA 0	Inclination 0°	Request # FD39022
Type LED	BIN 40-70M-4-TB-RB	Trademark Samsung	Reference LH351C	# LEDs 6
Master -	Reflector DKI Led assembly Road lighting Injected 0.0°			Reflector 5206
Protector Refractor Lens				
Protector integrated lenses Lens DKI 5206 PC				
Laboratory observation VOLTANA 0 with 6 Samsung LH 351C Used flux for efficiency matrix calculation = 1157lm - CCT = 3859K - CRI = 72,26 (see sphere test report 2019/52 on appendix).				
Purpose DOC	Sample date 08-01-2019		Sample # 39R004	
Observation DOC Voltana 0 with lenses 5206 Flux coefficient multiplier (only for efficiency matrix): From 350 to 500 mA : 1,379 From 350 to 700 mA : 1,846 From 350 to 1000mA: 2,450				
Notes The publication of this report in another form than the original one is not allowed without agreement of the laboratory. This report concerns type tests on one or a series of specimens.				

Asked by RCA	Measured by CLD	Approved by RLABO	Appendix 1	  226-TEST NBN EN ISO/IEC 17025 : 2005	42572
------------------------	---------------------------	-----------------------------	----------------------	---	--------------


LUMINOUS INTENSITY DIAGRAM

Origin TUNGSRAM-Schröder Zrt. Hungary		Production TUNGSRAM-Schröder Zrt. Hungary		Luminaire VOLTANA 0		Inclination 0°		Request # FD39022			
Source	Type LED	BIN 40-70M-4-TB-RB		Trademark Samsung		Reference LH351C		# LEDs 6	Reflector 5206		
Reflector	DKI Led assembly Road lighting Injected 0.0°								No	5206	
Matrices	425721	Φ 0-90° = 1040lm - 90-180° = 0lm								Absolute measurement	
Protector Refractor Lens		Protector integrated lenses Lens 6 x DKI 5206 PC									
Observation		Matrix in total flux @350 mA									
		Light losses due to thermal stabilisation : 1%									
		Electrical measurement on LED (#1) : Voltage = 16.83 V Current = 0.350 A Power = 5.88 W Electrical measurement on driver (#1) : Voltage = 230.00 V Current = 0.037 A Power = 7.98 W PF = 0.936 Total luminaire power = 7.98 W : Lm/Watt = 130.30 lm/W									
		Driver #1 : Philips Xitanium FP 22W 0.3-1.0A SNLDAE 230V S175 sXt S175 sxt PCB 00-71-626 A									
Plane	I Peak	Peak position	Index	I zero	Laboratory ambient t°		Measurement date				
15 - 165	723	55	S								
90	384	7	D								
270	369	0	G								

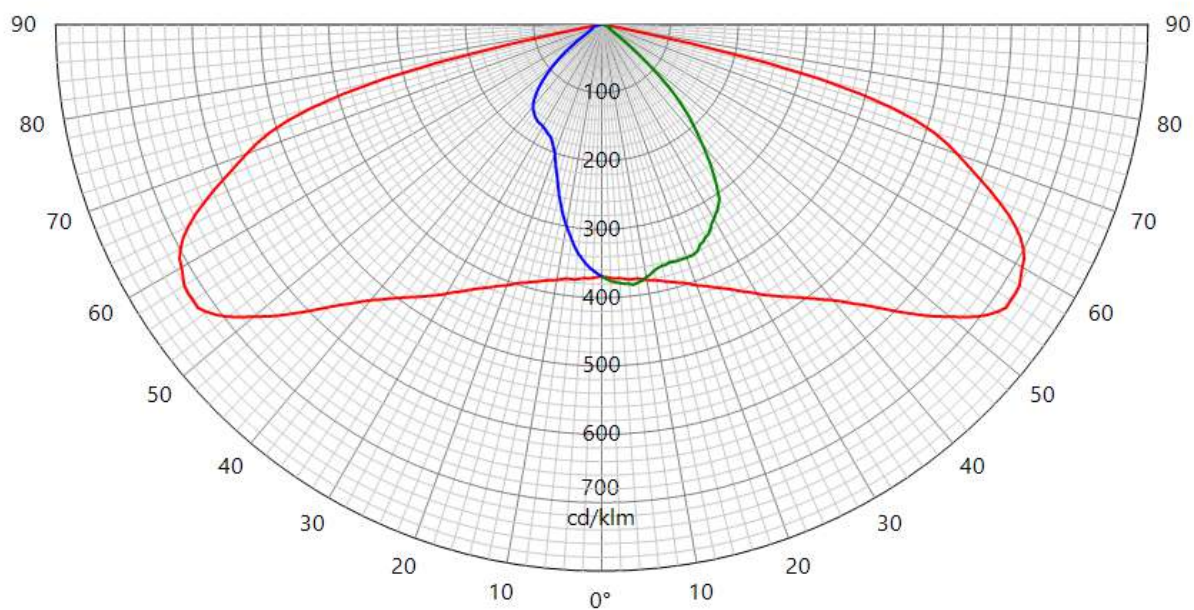**42572**


LUMINOUS INTENSITY DIAGRAM

Origin TUNGSRAM-Schröder Zrt. Hungary		Production TUNGSRAM-Schröder Zrt. Hungary		Luminaire VOLTANA 0		Inclination 0°		Request # FD39022		
Source	Type LED	BIN 40-70M-4-TB-RB		Trademark Samsung		Reference LH351C		# LEDs 6	Reflector 5206	
Reflector	DKI Led assembly Road lighting Injected 0.0°								No	5206
Matrices	425722	η 0-90° = 89.9% - 90-180° = 0.0%							Relative measurement	
Protector Refractor Lens		Protector integrated lenses Lens 6 x DKI 5206 PC								
Observation		Matrix in efficiency @350 mA								
		Light losses due to thermal stabilisation : 1%								
		Electrical measurement on LED (#1) : Voltage = 16.83 V Current = 0.350 A Power = 5.88 W Electrical measurement on driver (#1) : Voltage = 230.00 V Current = 0.037 A Power = 7.98 W PF = 0.936 Total luminaire power = 7.98 W								
		Driver #1 : Philips Xitanium FP 22W 0.3-1.0A SNLDAE 230V S175 sXt S175 sxt PCB 00-71-626 A								
Plane	I Peak	Peak position	Index	I zero	Laboratory ambient t°		Measurement date			
15 - 165	625	55	S							
90	332	7	D							
270	319	0	G							

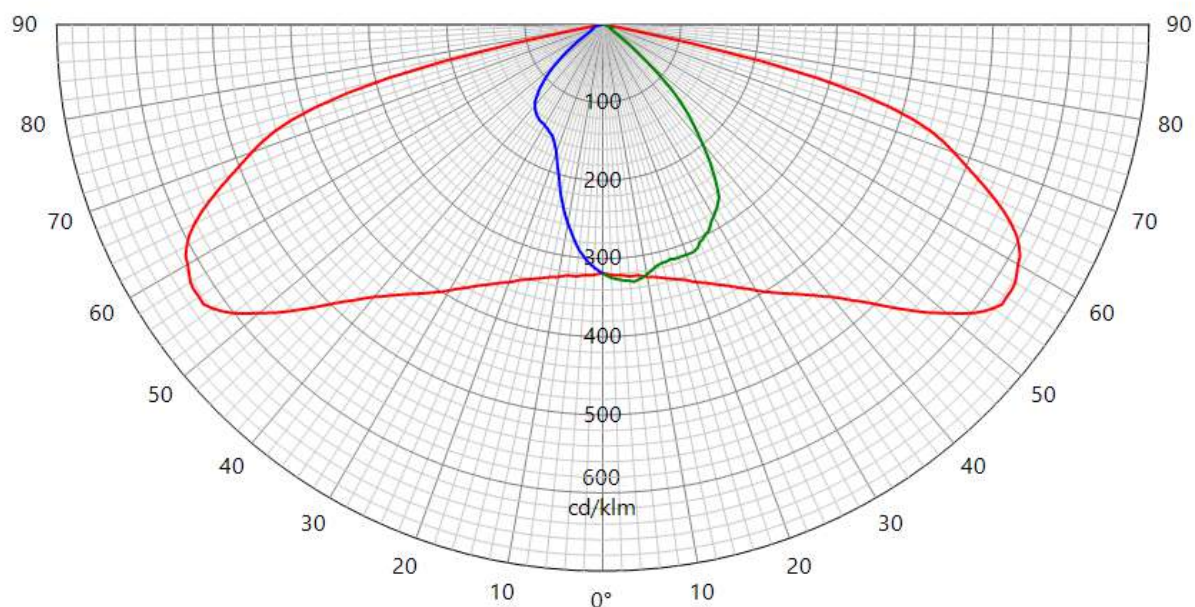**42572**


LUMINOUS INTENSITY DIAGRAM

Origin TUNGSRAM-Schröder Zrt. Hungary		Production TUNGSRAM-Schröder Zrt. Hungary		Luminaire VOLTANA 0		Inclination 0°	Request # FD39022
Source	Type LED	BIN 40-70M-4-TB-RB		Trademark Samsung	Reference LH351C	# LEDs 6	Reflector 5206
Reflector	DKI Led assembly Road lighting Injected 0.0°					No	5206
Matrices	425723 Φ 0-90° = 1434lm - 90-180° = 0lm					Absolute measurement	
Protector Refractor Lens	Protector integrated lenses Lens 6 x DKI 5206 PC						
Observation	Matrix in total flux @500 mA						
	Light losses due to thermal stabilisation : 1.7%						
	Electrical measurement on LED (#1) : Voltage = 17.15 V Current = 0.500 A Power = 8.58 W						
	Electrical measurement on driver (#1) : Voltage = 230.00 V Current = 0.050 A Power = 10.97 W PF = 0.962						
Total luminaire power = 10.97 W : Lm/Watt = 130.70 lm/W							
Driver #1 : Philips Xitanium FP 22W 0.3-1.0A SNLDAE 230V S175 sXt S175 sxt PCB 00-71-626 A							
Plane	I Peak	Peak position	Index	I zero	Laboratory ambient t°	Measurement date	
15 - 165	998	57	S				
90	532	7	D				
270	511	0	G				

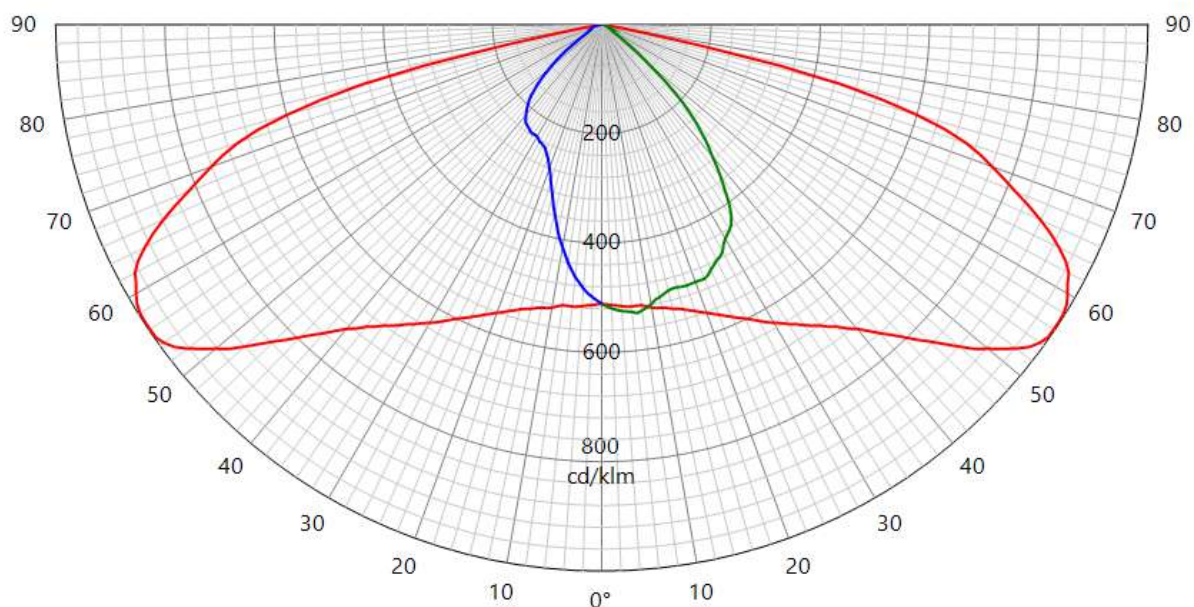**42572**


LUMINOUS INTENSITY DIAGRAM

Origin TUNGSRAM-Schröder Zrt. Hungary		Production TUNGSRAM-Schröder Zrt. Hungary		Luminaire VOLTANA 0		Inclination 0°		Request # FD39022			
Source	Type LED	BIN 40-70M-4-TB-RB		Trademark Samsung		Reference LH351C		# LEDs 6	Reflector 5206		
Reflector	DKI Led assembly Road lighting Injected 0.0°								No	5206	
Matrices	425724	Φ 0-90° = 1919lm - 90-180° = 0lm								Absolute measurement	
Protector Refractor Lens		Protector integrated lenses Lens 6 x DKI 5206 PC									
Observation		Matrix in total flux @700 mA									
		Light losses due to thermal stabilisation : 2,6 %									
		Electrical measurement on LED (#1): Voltage = 17.51 V Current = 0.700 A Power = 12.27 W									
		Electrical measurement on driver (#1): Voltage = 230.00 V Current = 0.067 A Power = 15.15 W PF = 0.977									
		Total luminaire power = 15.15 W : Lm/Watt = 126.68 lm/W									
Driver #1 : Philips Xitanium FP 22W 0.3-1.0A SNLDAE 230V S175 sXt S175 sxt PCB 00-71-626 A											
Plane	I Peak	Peak position	Index	I zero	Laboratory ambient t°		Measurement date				
15 - 165	1342	57	S								
90	713	6	D								
270	686	0	G								

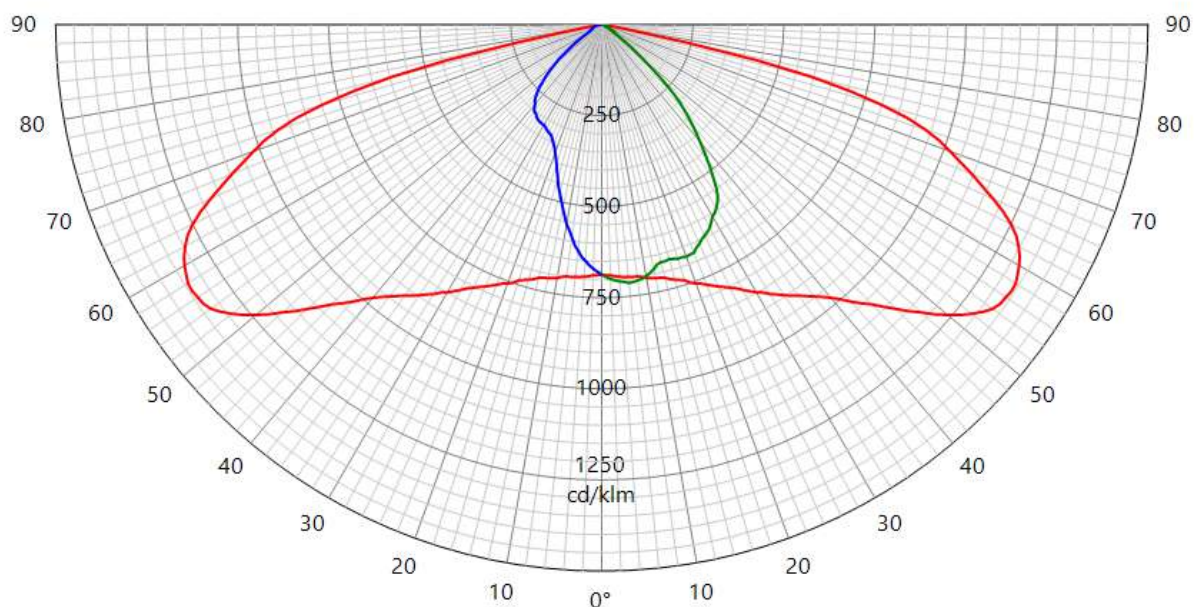**42572**

LUMINOUS INTENSITY DIAGRAM

Origin TUNGSRAM-Schröder Zrt. Hungary		Production TUNGSRAM-Schröder Zrt. Hungary		Luminaire VOLTANA 0		Inclination 0°	Request # FD39022
Source	Type LED	BIN 40-70M-4-TB-RB		Trademark Samsung	Reference LH351C	# LEDs 6	Reflector 5206
Reflector	DKI Led assembly Road lighting Injected 0.0°					No	5206
Matrices	425725 Φ 0-90° = 2548lm - 90-180° = 0lm					Absolute measurement	
Protector Refractor Lens	Protector integrated lenses Lens 6 x DKI 5206 PC						
Observation	Matrix in total flux @1000 mA						
	Light losses due to thermal stabilisation : 3,7 %						
	Electrical measurement on LED (#1) : Voltage = 17.96 V Current = 1.000 A Power = 17.96 W						
	Electrical measurement on driver (#1) : Voltage = 230.00 V Current = 0.096 A Power = 21.80 W PF = 0.987						
Total luminaire power = 21.80 W : Lm/Watt = 116.87 lm/W							
Driver #1 : Philips Xitanium FP 22W 0.3-1.0A SNLDAE 230V S175 sXt S175 sxt PCB 00-71-626 A							
Plane	I Peak	Peak position	Index	I zero	Laboratory ambient t°	Measurement date	
15 - 165	1783	56	S				
90	952	7	D				
270	914	0	G				

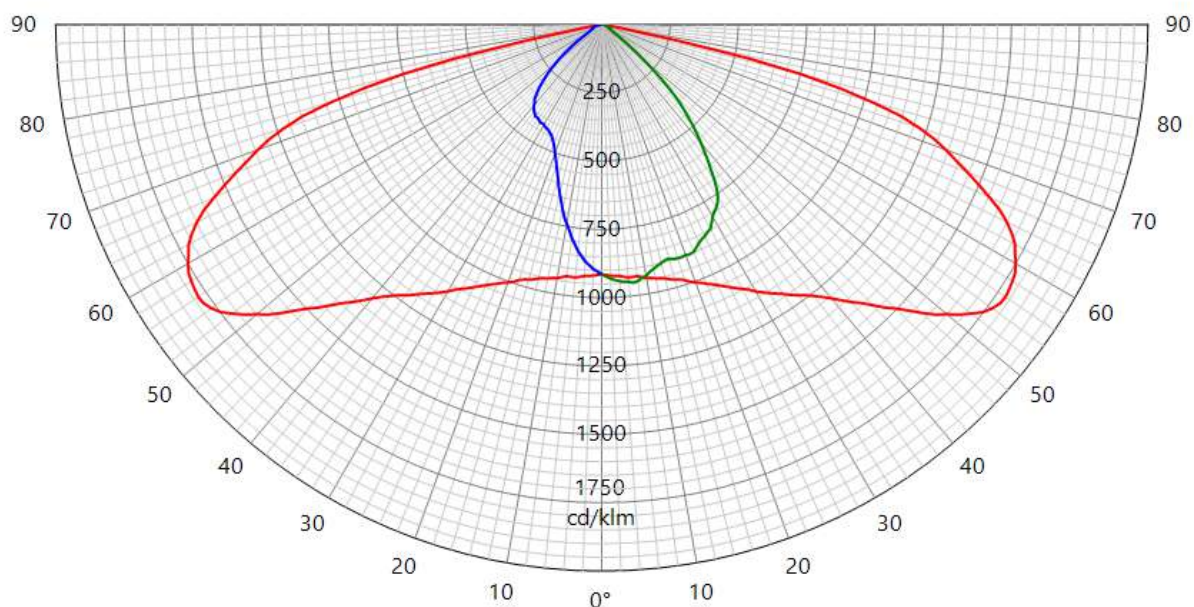**42572**

CONFORMITY STATEMENT

Measurement fulfil Standards:

NBN-EN 13032-1
NBN-EN 13032-4
NBN-EN 17025:2005
CIE 121-1996
LM79-08
CIE S 025

Measurement quantities measured:

Light distribution in relative or absolute photometry
Led alone cold lumen package
Led CCT and CRI
Power consumption of the fitting
Lm/watt

Electrical measurement, if not specified:

Primary values are AC with 50Hz frequency
Secondary values on SSL are DC

CCT, CRI and chromaticity coordinates: are measured in Ulbricht sphere.
If specified Main test report refer to sphere extra test report.

Light distribution are measured on gonio. If not otherwise specified, measurement is done at 50 Hz

Number of hours operated prior to measurement: if not otherwise specified, 0 hours (no aging).

Stabilization time: If not otherwise specified, a minimal stabilization time of 0.5 hour is applied; and measurement will start when it exists no more variation above 0.5% in 15 minutes

Total operating time of the product including stabilization:
45 minutes have to be added by measurement.
Minimal operating time is 75 minutes

Luminous intensity distribution: available on electronic file with
.mat format (internal Schröder format)
.ldt format (European standard)
.IES format (American standard)

Statement of uncertainties (K=2, 95% of confidence level):
Uncertainties calculated based on a typical Schröder fitting and PCBA

Intensity measurement: +/- 3%

Angle: +/- 0.5°

Flux: +/- 2.5%

Electrical DC

Power: +/- 0.25%

Voltage: +/- 0.15%

Current: +/- 0.15%

Electrical AC

Power: +/- 0.15%

Voltage: +/- 0.3%

Current: +/- 0.3%

Temperature: +/- 0.65%

ISP2000	JETI	
CCT:	+/- 5%	+/-7.5%
CRI:	+/- 2%	+/-2.75%
x/y:	+/- 2%	+/-4.6%

lm/Watt: +/-3.5%

Measuring instruments in use:

Gonio 1

Type C with Moving mirror

Manufacturer: LMT Lichtmesstechnik GmbH Berlin, Helmholtzstrasse 9 10587 Berlin, Germany

Type: GO-DS 2000

Calibration: traceable to PTB (Physikalisch-Technische Bundesanstalt D-Braunschweig) and METAS (Federal Institute of Metrology, CH-Bern)

Photometric test distance: By default 10 meter, on request 30 meter.

Gonio 2

Type C

Manufacturer: Technoteam Bildverarbeitung, Werner-von-Siemens-Strasse 5 98693 Ilmenau, Germany

Calibration: traceable to BIPM (Bureau International des Poids et Mesures F-Sèvres)

Photometric test distance: Near Field

Sphere n°1

4p geometry

Manufacturer: LMT Lichtmesstechnik GmbH, Helmholtzstrasse 9 10587 Berlin, Germany

Type: UL2000 + U1000 V-Lambda photometer

Calibration: traceable to BIPM (Bureau International des Poids et Mesures F-Sèvres)

Sphere n°2

4p geometry

Manufacturer: Instrument Systems GmbH, Neumarkter Str. 83, 81673 Muenchen, Germany

Type ISP2000 + Spectroradiometer CAS120 and CAS140

Calibration: traceable to NIST

Colorimetric portable spectroradiometer

Manufacturer: JETI Technische Instrumente GmbH, Tatzendpromenade 2 07745 Jena

Type: SPECBOS 1201

Calibration: traceable to NIST

Multimeters

Manufacturer: Agilent

Type: 34401A

Calibration: traceable to BIPM (Bureau International des Poids et Mesures F-Sèvres)

Wattmeters

Manufacturer: Yokogawa

Type: WT210 and WT310

Calibration: traceable to BIPM (Bureau International des Poids et Mesures F-Sèvres)

Thermometers

Amarell Precision

Type: Liquid in glass N63833


Calibration: traceable to LBT (Laboratoire Belge de Thermométrie)

LICENCE

No. 20254 replaces No.20142

Issued to:
Applicant:
R-Tech
Rue de Mons, 3
4000 LIEGE
Belgium

Licensee:
Schreder S.A.
Rue de Lusambo, 67
1190 BRUXELLES
Belgium



Product : road, square, street, flood lighting
Trade name(s) : SCHREDER
Type(s)/model(s) : VOLTANA0 6 LED xx, VOLTANA0 8 LED xx

The product and any acceptable variation thereto is specified in the annex to this licence and the documents therein referred to.

SGS CEBEC hereby declares that the above-mentioned product has been certified on the basis of:

- a type test according to the standard specified in annex
- an inspection of the production location.
- a certification agreement with the number 1173

SGS CEBEC hereby grants the right to use the CEBEC certification mark

The ENEC/CEBEC certification mark may be applied to the product as specified in this licence for the duration of the ENEC/CEBEC certification agreement and under the conditions of the ENEC/CEBEC certification agreement.

This licence is issued on: 15/03/2017

Ir. C. Lana,
Certification Manager

© Only integral publication of this certificate, including the annex, is allowed

This certificate is only valid combined with the publication on the following web address: www.sgs.com/ee



SPECIFICATION OF THE CERTIFIED PRODUCT

Product data

Product	:	road, square, street, flood lighting
Trade name(s)	:	SCHREDER
Type(s)/Model(s)	:	VOLTANA0 6 LED xx, VOLTANA0 8 LED xx
description	:	Street lighting
rated voltage (Un)	:	200-240 V
rated frequency	:	50-60 Hz
class	:	class I
degree of protection	:	IP66
additional information	:	IK08
rated output current (In out)	:	max. 1050 mA

Additional information

xx = Color Temperature can be :
NW neutral white
CW cool white
WW warm white

Product data - type VOLTANA0 6 LED xx

rated power	:	8-10-15-23 W
lamp(s)	:	6 LED
temperature class	:	Ta max. 50°C

Product data - type VOLTANA0 8 LED xx

rated power	:	11-14-20-31 W
lamp(s)	:	8 LED
temperature class	:	Ta max. 40°C

TESTS

Test requirements

EN 60598-1:2015
EN 60598-2-3:2003 + A1:2011

Test results

The test results are laid down in test report(s) ref. P-1560-1a

Remarks

This certificate is based on test reports Nos. P1560-1a


Conclusion

The examination proved that all test requirements were met.

Checked by, project leader : Christian Maes - 15/03/2017

Department Manager,
Product Certification

Certification Manager

 2017-03-15

FACTORY LOCATION(S)

Schröder do Brasil Iluminação Ltda.
Rua Iracema Lucas, 415
Distrito Industrial Vinhedo
13280-000 SAO PAULO
Brazil

Schreder TOV
Vul. Mykulynetska 46B
46000 TERNOPIL
Ukraine

Schreder (China) Lighting Industrial Co., Ltd
No.40 Xinye 2 Street, Tianjin Economic Technological Development Zone West Zone,
300462 Tianjin City, P.R.China
China

Socelelec S.A.
Av. de Roanne, 66
Poligono Industrial "EL HENARES"
19180 MARCHAMALO (GUADALAJARA)
Spain

Schröder Iluminação S.A.
Rua da Fraternidade Operária, nº 3
2795-491 CARNAXIDE, OEIRAS
Portugal

Comatelec S.A.
Z.I.
18400 SAINT FLORENT S/CHER
France

Tungsram-Schröder Világítási Berendezések Zrt
Tópart 2
2084 PILISSZENTIVAN
Hungary

Laboratory Service PHYSICAL TEST REPORT



R-Tech
Rue de Mons 3 – B-4000 Liège – Belgium
Tel.: +32 4 224 71 40 – Fax: +32 4 224 25 90
Member of Schröder Group

Subject: VOLTANA-0 / 6 led's / Moons PU025H105AQ 0-10V driver

Sample n°: P-E16371, P-E16375

Test purpose: Electrical measurements @ 1.05A

Remarks:

Test request n°: P-D16542

Folder n°: P-F16041

TEST CONDITIONS:

Operator: CLOSSET Frédéric

Load: 6 Led's
Typical Vf: 3,1 V

Driver: Moon's PU025H105AQ_0-10V Series

Power supply: Elgar ET3500 230V 50Hz

Measurement device: Fluke Norma 4000 HF power meter

CONCLUSIONS:



PF: 0.97

Efficiency: 82.1 %

THD: 9.1 %

Harmonics we are under the 25W => no measurements

Duplicate to: Mr M. Thijs
LAB 05/10/2016
L. Maghe

//P-16CR542

A handwritten signature in blue ink, appearing to be "L. Maghe", written over a yellow rectangular background.

Laboratory Service PHYSICAL TEST REPORT



R-Tech
Rue de Mons 3 – B-4000 Liège – Belgium
Tel.: +32 4 224 71 40 – Fax: +32 4 224 25 90
Member of Schröder Group

Subject: VOLTANA-0 8 led's class II PHILIPS driver 40 W

Sample n°: P-E17149

Test purpose: EMC tests according to EN 55015 & EN 61547 Standards

Remarks:

Test request n°: P-D17187

Folder n°: P-F16041

TEST CONDITIONS:

Operator: EMC - ULg

Test Summary

EN 55015 & EN 61547 Standards

Emission

Standard	Limit / Level	Result	
		PASS	FAIL
EN 55015 Conducted Emission	9kHz- 30 MHz	X	
EN 55015 Annex B	30 MHz – 300 MHz	X	
EN 61000-3-2	Class C a)	X	

Immunity

Standard	Limit / Level	Result	
		PASS	FAIL
EN 61000-4-2	4 kV at contact 2, 4 & 8 kV in the air Criteria B required	X	
EN 61000-4-3	3 V/m 80 MHz – 1 GHz AM 80 % 1 kHz Criteria A required	X	
EN 61000-4-4	1 kV 5 kHz Criteria B required	X	
EN 61000-4-5	0.5 & 1 kV MD Criteria C required	X	
EN 61000-4-5	Complementary levels 2, 4, 8 & 10 in MD Criteria C required	X	
EN 61000-4-6	3 V 150 kHz – 80 MHz AM 80 % 1 kHz Criteria A required	X	
EN 61000-4-11	0% U 0.5 period 70% U 10 periods Criteria B/C required	X	

VOLTANA-0 8 led's class II PHILIPS driver 40 W

Driver: Philips FP 40W 0.3-1A

EMC Auxiliaries: Varistors

CONCLUSIONS:



VOLTANA 0 8 led's driven by PHILIPS FP 40 W driver complies with the CISPR/EN 55015 and EN 61547 Standards.

Remark: Surge protection tested OK up to 10 KV for Differential mode for the equipment with eventual Fuse replacement.

Duplicate to: Mr Ph. Verbeeck
LAB 24/04/2014
G. Cheuvart

//P-17CR187

Laboratory Service PHYSICAL TEST REPORT



R-Tech
Rue de Mons 3 – B-4000 Liège – Belgium
Tel.: +32 4 224 71 40 – Fax: +32 4 224 25 90
Member of Schröder Group

Subject: VOLTANA-0 with Glass protector

Sample n°: P-E16420

Test purpose: Mechanical impact resistance test following IEC/EN 62262 Standard

Remarks:

Test request n°: P-D16604

Folder n°: P-F16041

TEST CONDITIONS:

Operator: BOMBIL Patrick

Glass thickness: 5 mm

At pendulum hammer

5 impact points distributed on protector surface

1 impact on clamp

One impact on each point

Test on 5 samples

Test

Result

IK08 : Impact energy: 5 joules
Hammer weight: 1,7 kg
Height of fall: 29,4 cm

OK for the 5 samples for all tested points

CONCLUSIONS:



VOLTANA 0 equipped with glass protector complies with IK08 test following IEC/EN 62262 Standard.

Duplicate to: Mr M. Thijs
LAB 07/11/2016
L. Maghe

//P-16CR604

A handwritten signature in blue ink, appearing to read "Maghe".

Laboratory Service PHYSICAL TEST REPORT



R-Tech
Rue de Mons 3 – B-4000 Liège – Belgium
Tel.: +32 4 224 71 40 – Fax: +32 4 224 25 90
Member of Schröder Group

Subject: VOLTANA-0 equipped with 5205 & 5206 lenses

Sample n°: P-E16393, P-E16460

Test purpose: Mechanical impact resistance test following IEC/EN 62262 Standard

Remarks:

Test request n°: P-D16655

Folder n°: P-F16041

TEST CONDITIONS:

Operator: BOMBIL Patrick

VOLTANA-0 equipped with 6 led's

At pendulum hammer

5+2 impact points distributed on lens protector surface

One impact on each point

Test on 5 samples

Test

Result

IK08 : Impact energy: 5 joules
Hammer weight: 1,7 kg
Height of fall: 29,4 cm

OK for all tested samples

CONCLUSIONS:



VOLTANA 0 equipped with 5205 & 5206 lenses complies with IK08 test following IEC/EN 62262 Standard.

Duplicate to: Mr M. Thijs
LAB 23/11/2016
L. Maghe

//P-16CR655

A handwritten signature in blue ink, appearing to read "Maghe".

Laboratory Service PHYSICAL TEST REPORT



R-Tech
Rue de Mons 3 – B-4000 Liège – Belgium
Tel.: +32 4 224 71 40 – Fax: +32 4 224 25 90
Member of Schröder Group

Subject: VOLTANA 0 – 8 led's – Flat glass protector

Sample n°: P-E16377, P-E16394

Test purpose: Tightness test IP66 following IEC/EN 60598-1 Standard

Remarks:

Test request n°: P-D16575

Folder n°: P-F16041

TEST CONDITIONS:

Operator: BOMBIL Patrick

VOLTANA-0 8 led's with flat glass protector

Pre-conditioning: endurance test

Test	Result
<u>IP6X</u> : -Luminaire switched ON until stable T° -Talcum in suspension (blowing ON) -After 1', luminaire OFF -Talcum for 3 hours	OK
<u>IPX6</u> : - Luminaire switched ON until stable T° - Luminaire switched OFF and immediately sprayed with water jet - Hose Φ 12,5 mm - Water pressure: 1 kg/cm ² - Spraying distance: 3 m - Duration of test: 3 minutes	OK

CONCLUSIONS:



VOLTANA-0 8 led's with flat glass protector complies with IP66 test following IEC/EN 60598-1 Standard.

Duplicate to: Mr M. Thijs
LAB 21/11/2016
L. Maghe

//P-16CR575

A handwritten signature in blue ink, appearing to read "Maghe".

Laboratory Service PHYSICAL TEST REPORT



R-Tech
Rue de Mons 3 – B-4000 Liège – Belgium
Tel.: +32 4 224 71 40 – Fax: +32 4 224 25 90
Member of Schröder Group

Subject: VOLTANA 0 – 6 led's NW @ 1050 mA

Sample n°: P-E16418

Test purpose: Photobiological safety tests following IEC-EN 62471 Standard

Remarks:

Test request n°: P-D17045

Folder n°: P-F16041

TEST CONDITIONS:

Operator: Laborelec

VOLTANA 0 – 6 led's NW @ 1050 mA



Test program:

Spectral radiance and irradiance measurements of the device under test in the following wavelength ranges:

- 200 to 400 nm : « Actinic UV skin & eye » irradiance
- 315 to 400 nm : « Eye UV-A » irradiance
- 300 to 700 nm : « Blue Light » radiance
- 380 to 1400 nm : « Thermal Retinal » radiance
- 780 to 1400 nm : « Thermal Retinal » radiance (weak visual stimulus)

Determination of the Risk Group classification for each hazard and recommendation about the marking of the product.

CONCLUSIONS:

RG2 @ 20 cm

RG1 @ 30 cm

Duplicate to: Mr Ph. Verbeeck
LAB 08/06/2017
G. Cheuvart

//P-17CR045

A handwritten signature in blue ink, appearing to read "Cheuvart", written over a light blue circular stamp.

Thermal Test LED

General information

Subject : VOLTANA 0 - 8 LEDs Oram 50 W driver
Created on : 08/11/2018
Validated on : 21/11/2018
Test number : D180791
Reference norm : IEC/EN 60598-1 Standard
Sample(s) : E180590
Folder : P-F16041

Test conditions

Luminaire : VOLTANA 0
Number of LED : 8

Driver : Optotronic OT50/120-277/1A2 2DIM LT2 P / 00-14-565
Driver info : Tc (max: 80°C)
Driver current (mA) : 1250
SPD : Vossloh Lighting Solutions SPC3 230/10 K

Measurements devices :
Fluke Norma 4000 - HF Powermeter - (E110) : Electrical measurements
Keithley 2701 (E097) – Ethernet Multimeter/Data Acquisition System :
Thermal & VF led measurements

Power Supply :
APT 300XAC AC power supply (E096)
Supply voltages: 230 V 50 Hz

Junction Temperature measurement method : Junction temperature
measurement by base temperature measurement and electrical
measurement. $T^{\circ}j = T^{\circ}b + R_{jb} \times P_{led}$

Operator : MESPOUILLE Loic



IMG_0885

Conclusion



Informative

Ta: 40°C limited by lenses and driver; according IEC 60598-2-3 and IEC 60598-2-5 (outdoor use only)
Ta: 30°C limited by lenses and driver; indoor use and UL standard
Tq: 15°C limited by lenses and driver; according IEC 62722-2-1
Tq given for 100 khrs of lifetime

Validated by :

GHYSENS Gilles

Duplicate to : BOS Peter

LAB : 22/11/2018

//CR180791

1/1



VOLTANA 0

5136

Optic	5136
Protector	Flat glass
Source	8 Samsung LH351C
Matrix	425502



Characteristics

416	156	91	2.6	IP 66	IK 08	I EU	0.012
Length (mm)	Width (mm)	Height (mm)	Weight (kg)	Tightness level*	Impact resistance*	Electrical class*	CxS (m²)

* According to IEC-EN60598 and IEC-EN62262

Features

The ultimate, cost-effective, performing family of luminaires that pays for itself

- Cost-effective and efficient lighting solution for a fast return on investment
- High performance with safety and comfort
- 5 sizes for flexibility
- IP 66 tightness level
- ThermiX® to withstand high temperatures
- Designed to incorporate the Owllet range of control solutions

Types of application

- Square and park
- Roundabout
- Residential road
- Urban road

Information for 1000 lm matrix

Efficacy (%)	86.5	G Class (EN 13201-2)	G3	I 70-80-90-95 (cd)	550 - 98 - X - X
DLOR (%)	86.5	G* (EN 13201 2015)	G*2	CIE flux code N 1→5 (%)	50.4 - 79.8 - 97.5 - 100.0 - 86.5
ULOR (%)	0.0	Imax (cd)	554	Gradient 90°	34cd
ULR (%)	0.0	Aperture 0-180°	77 - 77	Gradient 270°	10cd
Incl ULR 4%	-45/45°	Aperture 90-270°	30 - 13		

Photometrical characteristics

LED count	Colour code	Current (mA)	Luminaire power (W)	Source flux (lm)	Luminaire output flux (lm)	Luminaire efficacy (lm/W)	Peak (cd)	BUG Rating	Voltage (V)
			Ambient temp = 25°						
8	NW 740	350	10	1520	1315	132	842	B1 U0 G0	230
8	NW 740	500	14	2096	1814	130	1161	B1 U0 G1	230
8	NW 740	700	19	2810	2432	128	1557	B1 U0 G1	230
8	NW 740	1000	28	3760	3254	116	2084	B1 U0 G1	230
8	NW 740	1050	29	3861	3341	115	2139	B1 U0 G1	230
8	NW 740	1250	37	4362	3775	102	2417	B1 U0 G1	230
8	WW 730	350	10	1440	1246	125	798	B1 U0 G0	230
8	WW 730	500	14	1986	1718	123	1100	B1 U0 G1	230
8	WW 730	700	19	2663	2304	121	1475	B1 U0 G1	230
8	WW 730	1000	28	3563	3083	110	1974	B1 U0 G1	230
8	WW 730	1050	29	3658	3165	109	2027	B1 U0 G1	230
8	WW 730	1250	37	4133	3576	97	2290	B1 U0 G1	230

Tolerance on flux +- 7% - Tolerance on power +- 5%

Summary

CONCEPT

Family of 6 road LED luminaires

Recommended installation height: between 4.00 and 12.00m

For optimal heat dissipation, the driver and LED engine are in separate compartments and juxtaposed in a horizontal section

HOUSING & FINISH

- Housing in high-pressure, die-cast aluminium, polyester powder coated
- Colour: RAL 7038

INSTALLATION

- Luminaire can be fixed by side-entry with a clamp, suitable for 42-60mm diameter
- Built-in inclination steps: -10°, -5°, 0°, 5°
- Post-top adapter diameter 48-60mm or 76mm, tightened with 2 stainless steel screws
- Direct access to the driver compartment with screws for easy maintenance on-site

OPTICAL UNIT

- Protected against lens degradation by 5mm thick extra-clear hardened glass
- Flatbed PCB with acrylic lens overlay principle
- Various photometric distributions: from narrow road to motorway, medium and large area
- CRI > 70
- ULOR: 0%

LED lumen depreciation

- Lifetime residual flux @ Tq=25°C @ 100.000 hrs: 350mA & 500mA: 90%; 700mA: 80%; 1A: 70%

ELECTRICAL

- Class I or Class II
- Input voltage: 120-277V - 50-60Hz
- Power factor > 90% at full load
- Surge protection: 4kV minimum (10kV + 10kA optional)
- Thermal protection on LED PCBA (see Thermix concept)

STANDARDS & CERTIFICATIONS

- CE
- ENEC
- LM79-80
- ROHS
- Certified for 3G vibration
- All measurements in ISO17025 accredited laboratory

OPTIONS


- Other RAL or AKZO colours
- Back Light control system
- OWLET remote management
- Custom dimming profile


VOLTANA 0 - 5136 - 8 Samsung LH351C - Flat glass - 425502

12/05/2020


Schröder

- Photocell

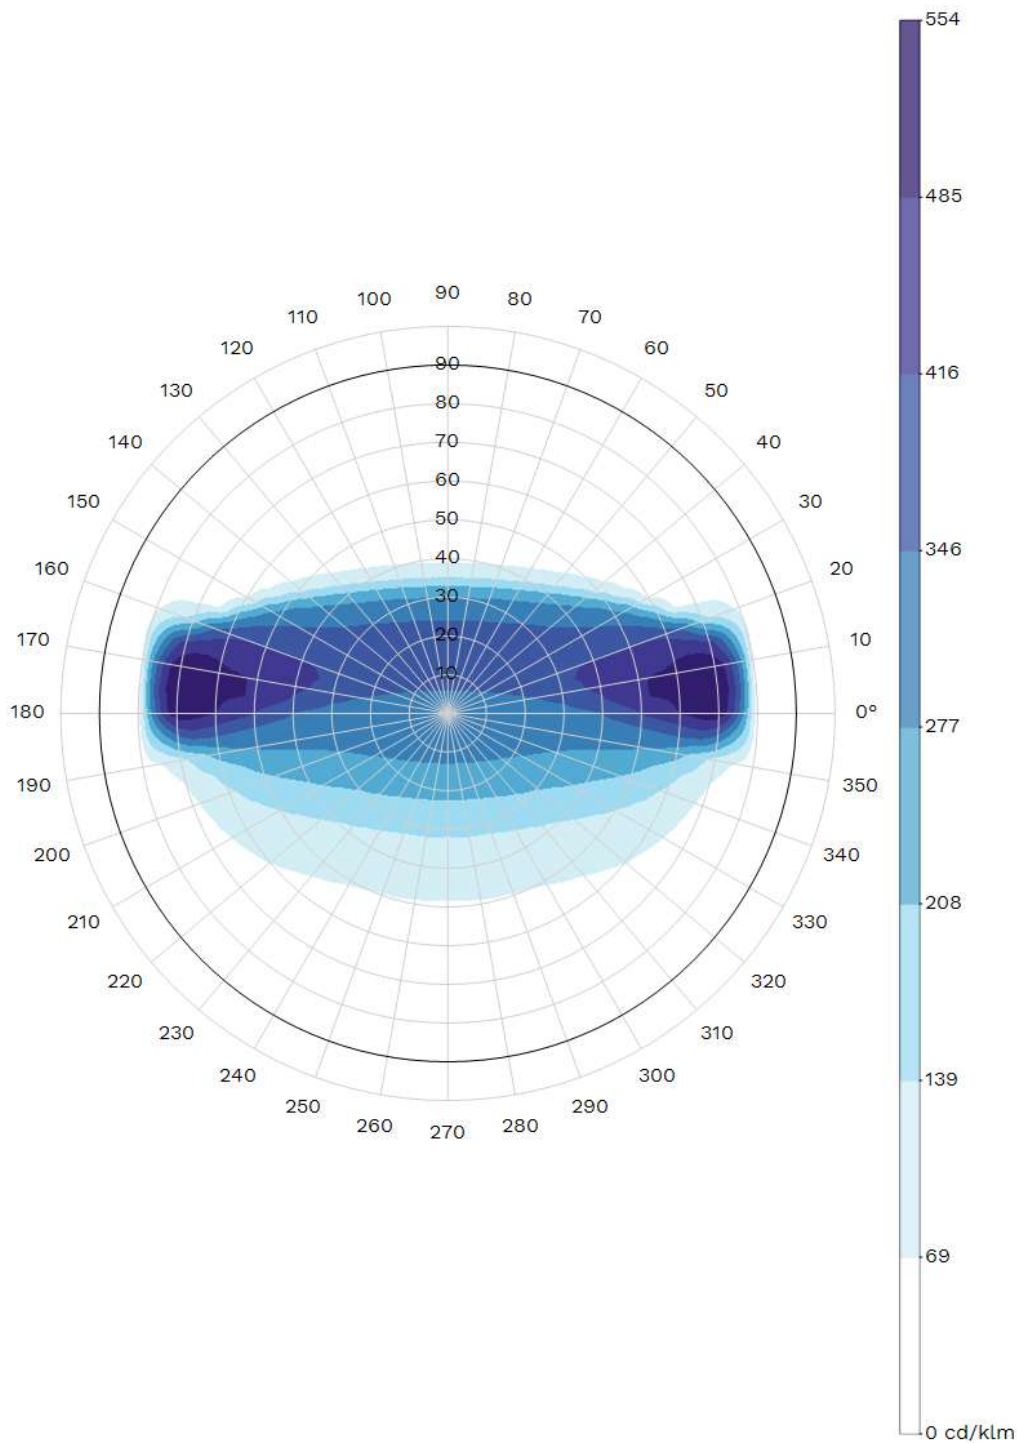


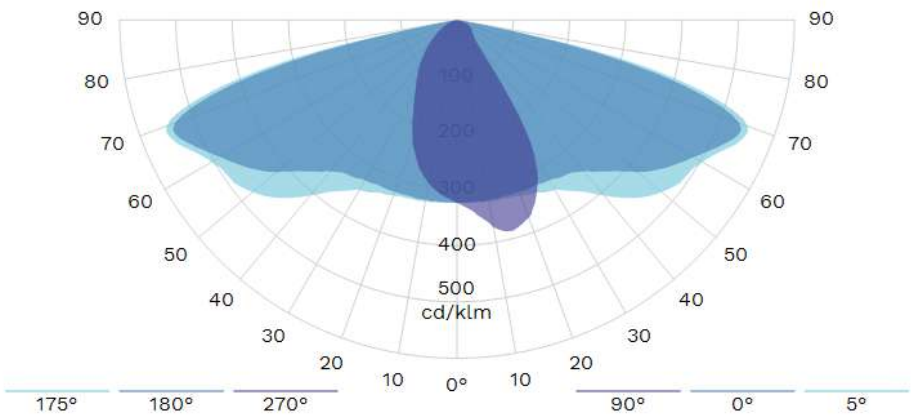


Isolux

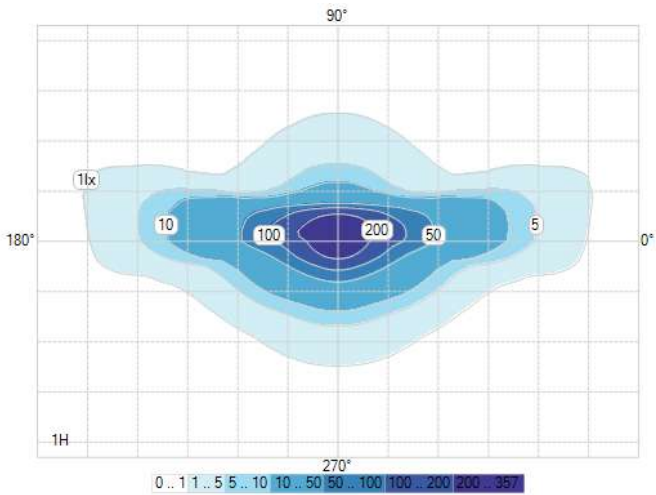

K-Curve

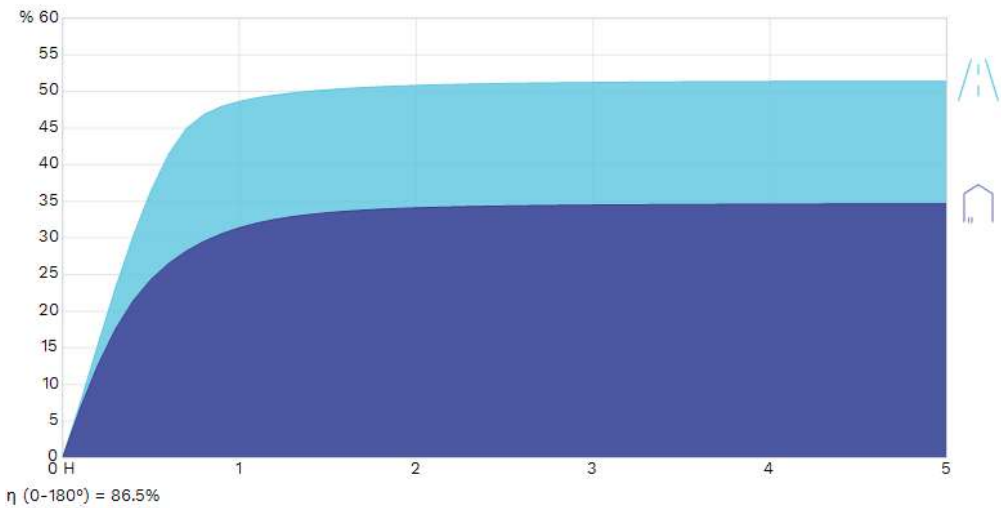


IES Roadway Classification / Nema Classification

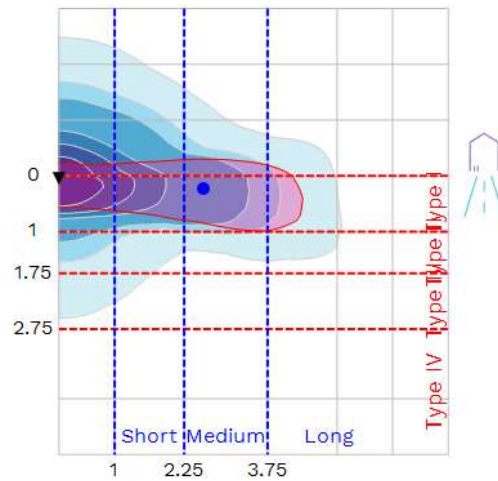


I - Medium

Luminaire classification system (LCS)

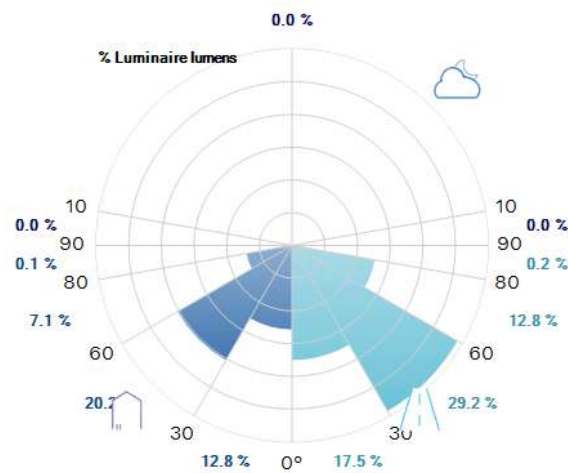

Intensity diagram in max Cone and in CPlane

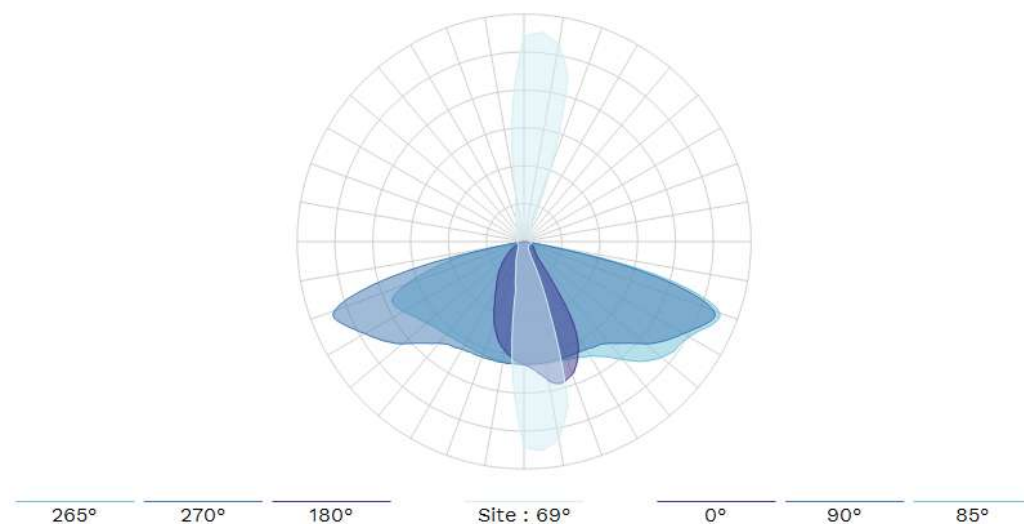

Copyright © 2020 Schröder SA. All rights reserved. Specifications are of an indicative nature and subject to change without notice.

<http://www.schreder.com>