

Laboratory Refrigerator



656L




1500L

Technical Parameters

Model	BPR-5V650		BPR-5V1500
External Size(W*D*H) mm	1220*642*1885		1800*775*1965
Capacity	656L		1500L
Temp. Range	2~8℃		
Temp. Accuracy	0.1℃		
Control System	Microprocessor Control & Large Screen LED Display		
Alarm	Audible and visual alarm for: High and low temperature,Thermostat fault ,Door Ajar,Power Failure		Senor fault, door Ajar
Refrigeration Type	Forced air refrigeration system		
Refrigerant	R290		R134a, CFC Free
Condenser&Evaporator	High efficiency air-cooled condenser, made of copper		
Defrost	Frostless design		
Construction	Structure	Unibody design & Mono-assembly foaming (rigid polyurethane insulation material)	
	Internal Material	Spraying steel plate	Stainless steel
	External Material	Spraying steel plate	Stainless steel
Shelves	Adjustable shelves made of high quality steel wire		
	10 pcs	12 pcs	
Consumption	385W		1040W
Power Supply	AC110/220V±10%, 50/60Hz		AC110/220V±10%, 50/60Hz
Standard Accessory	LED lamp, Shelves, Door keys, Testing hole (only for BPR-5V650), Battery		
Package Size(W*D*H) mm	1335*715*2000		1880*820*2150
Gross Weight	189kg		319kg

-25℃ Freezer (Separate Refrigerator)

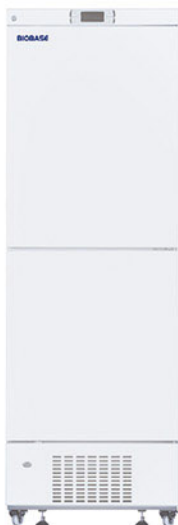

300L



368L

Technical Parameters

Model	BDF-25V300RF		BDF-25V368
External Size(W*D*H) mm	650*620*1980		720*830*1870
Capacity	Refrigerator:198L, internal size 565*480*759mm		Upper:189L
	Freezer:102L, internal size 461*465*600mm		Lower:179L
Temp.Range	Refrigerator: 2℃~8℃;		Upper: 2℃~8℃
	Freezer: -10℃~-25℃		Lower: -10℃~-25℃
Temp. Accuracy	0.1℃		
Control System	Microprocessor control		
Alarm	Sensor failure alarm, high or low temperature alarm,open the door alarm; Thermostat failure		
Cooling Method	Direct cooling	Upper: Air refrigeration; Lower: Direct cooling	
Refrigerant	R290, CFC free		CFC free
Condenser	Aluminum and iron pipes		Wire tube condenser
Construction	Structure	Unibody design and thickened environmental protection foam insulation layer	
	Internal Material	PS plate	Cold- rolled steel coated with
	External Material	Pre-coated galvanized plate	anti-bacteria powder
Shelf / Drawer	Refrigerator: 2 shelves		Upper:3 plastic dipping shelves
	Freezer: 3 drawers		Lower:2 plastic dipping shelves, 6 PS drawers
Consumption	333W		300W
Power Supply	Standard:220V 50/60Hz,optional:110V 60Hz		
Package Size(W*D*H) mm	720*695*2015		775*920*1990
Gross Weight	120kg		166kg