
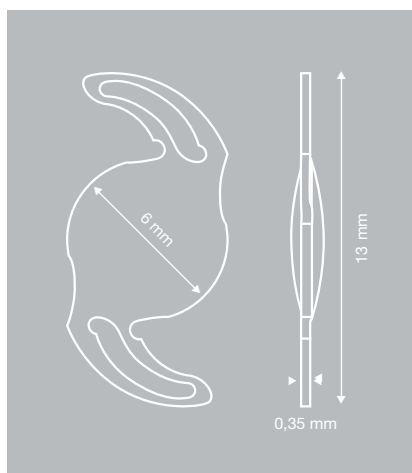


B! | FLEXI^B |

877FAB · 877FABY
Hydrophobic IOL

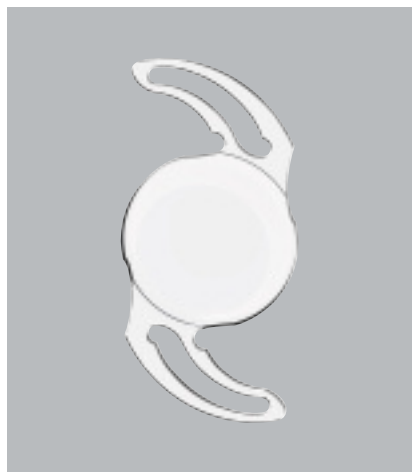

**FLEXIB****877FAB · 877FABY**
Hydrophobic IOL**Technical specification**

Type	Single-piece Aspheric Hydrophobic Intraocular Lens
	for implantation into the capsular bag

Optic	Refractive – Aspheric
-------	-----------------------

PCO protection	360° Special Square Edge (patented)
----------------	-------------------------------------

Estimated incision size	2.4 mm
-------------------------	--------

Powers available*	0.0 D → +9.0 D · (increment: 1.0 D)
-------------------	-------------------------------------

	+10.0 D → +30.0 D · (increment: 0.5 D)
--	--

	+31.0 D → +35.0 D · (increment: 1.0 D)
--	--

A-constant**	118.9 (SRK/T)
--------------	---------------

Sterilization	Ethylene-oxide
---------------	----------------

Material

• 877FAB	Hydrophobic Acrylic with UV absorber
----------	--------------------------------------

• 877FABY	+ blue light filter
-----------	---------------------

Refractive index	1.47
------------------	------

ABBE number	58
-------------	----

Geometry

Optic design	Biconvex
--------------	----------

Overall length	13.0 mm
----------------	---------

Optic diameter	6.0 mm
----------------	--------

Haptic thickness	0.35 mm
------------------	---------

Haptic angulation	0° – asymmetrical design with posterior vaulting
-------------------	--

Storage

Temperature	+15 – +35°C
-------------	-------------

Humidity	15% – 50%
----------	-----------

Shelf life	5 years (from sterilization)
------------	------------------------------

* Other powers upon request

** It is recommended that surgeons personalize the constants they use. Please find more information about IOL constants on ULIB.
(<http://www.ocusoft.de/ulib/c1.htm>)

EA-IMCBHEN 03 201606