



Knowledge Beyond Measure.

AeroTrak™+ Portable Airborne Particle Counters

A100 Series



Unmatched
5 Year Laser
Warranty

AeroTrak™+ Portable Airborne Particle Counters (APCs) are ideal for all industries for cleanroom certification, monitoring and specialized tasks including gas testing and filter scanning.

AeroTrak™+ Portable APCs provide the newest features—data integrity (including Annex 1), communication options, and an intuitive GUI—that lead to a better customer experience and easy compliance. Standalone or as part of an easy to use complete monitoring system, AeroTrak+ Portable APCs meet your needs.

Choose Your Model

Model	Flow Rate	Channel Size Options	Recommended Manufacturing Application
A100-31	1 CFM (28.3 LPM)	0.3 µm to 10 µm, (6) user selectable channels	Pharmaceutical, Semiconductor, Electronics, Aerospace, Optics, Automotive, Clean Manufacturing
A100-35	1.77 CFM (50 LPM)	0.3 µm to 10 µm, (6) user selectable channels	Pharmaceutical, Medical, Manufacturing
A100-51	1 CFM (28.3 LPM)	0.5 µm to 10 µm, (6) user selectable channels	Pharmaceutical, Semiconductor, Electronics, Aerospace, Optics, Automotive, Clean Manufacturing
A100-55	1.77 CFM (50 LPM)	0.5 µm to 10 µm, (6) user selectable channels	Pharmaceutical, Medical, Manufacturing
A100-(xx) A	3.5 CFM (100 LPM)	0.5 µm to 10 µm, (6) user selectable channels	Pharmaceutical, Medical, Manufacturing

A100-(xx) A "A" suffix adds analog input and output to any model

Features and Benefits

- One instrument does it all- classify, monitor, filter scan, gas testing and root-cause analysis
- Highly visible status conditions - LED light bar viewable 20 meters / 360°
- Access user controls for GMP compliance
- Sample the correct volume of gas with built in gas correction factors
- Automated ISO 14644-1 and GMP (EU GMP and China GMP) reporting and instrument workflow with included TrakPro™ Lite Secure Software
- Filter test and investigate mode (both audible and visual)
- ISO 21501-4 calibration compliance
- WiFi® enabled connectivity
- Industry best 5 year laser warranty
- Fit for purpose - easy to clean, stainless steel housing
- Simplify integration into third party systems with 4-20 mA analog particle data output and environmental sensor input options
- Multiple instrument reporting supported by latest TrakPro™ Lite Secure Software

**Ready for Measurement.
Engineered for You.
Portable Particle Counters to
Make Your Job Easy.**

Specifications

AeroTrak™+ Portable Airborne Particle Counters

A100 Series

Specific Model Specifications

	A100-31	A100-35	A100-51	A100-55	A100-50
Size Range	0.3 µm to 10 µm			0.5 µm to 10 µm	
Flow Rate	1 CFM (28.3 LPM) with ± 5% accuracy	1.77 CFM (50 LPM) with ± 5% accuracy	1 CFM (28.3 LPM) with ± 5% accuracy	1.77 CFM (50 LPM) with ± 5% accuracy	3.53 CFM (100 LPM) with ± 5% accuracy
Particle Channel Sizes	0.3 µm to 10.0 µm, (6) user selectable channels	0.3 µm to 10.0 µm, (6) user selectable channels	0.5 µm to 10.0 µm, (6) user selectable channels	0.5 µm to 10.0 µm, (6) user selectable channels	0.5 µm to 10.0 µm, (6) user selectable channels
Size Resolution	<15% @ 0.3 µm (per ISO 21501-4)			<15% @ 0.5 µm (per ISO 21501-4)	
Counting Efficiency	50% at 0.3 µm; 100% for particles >0.45 µm			50% at 0.5 µm, 100% for particles >0.75 µm	
Concentration Limit			8,110,000/ft ³ (286,383,300/m ³) @ 10% coincidence loss all models		


For All Models

Light Source	Laser Diode	Data Storage	250,000 sample records, 15 minutes of 1 second data with FMS
Vacuum Source	Internal pump with patented flow control technology and automatic manifold detection (patent pending)	Access Control Reports	Multilevel user access with audit trail ISO 14644-1, EU-GMP, China GMP. Reports can be printed or exported to secure XML or PDF
Laser Warranty	Five Years	Dimensions (HxWxD)	8.9 in x 9.8 in x 8.7 in (22.6 cm x 25 cm x 22.2 cm)
Instrument Warranty	Two Years	Weight	4.8 kg (10.5 lbs) with battery 4.3 kg (9.5 lbs) without battery 5.2 kg (11.5 lbs) with two batteries
Calibration Frequency	One Year	Power (AC Adapter)	100 – 240 VAC, 50 – 60 Hz, 1.5A Max Mains supply voltage fluctuations not exceeding +/- 10% of rated voltage, DC power requirement to instrument: 24 VDC @ 5.0 Amps
Communication	Modbus TCP, Ethernet, USB, Wireless	Storage Range	-40° to 158°F (-40° to 70°C) / Up to 98% non-condensing relative humidity
Near Field Communication	Operator and location	Printer	Built-in thermal printer (foreign languages supported)
Wireless Option	RTU Wireless Option Available	Included Accessories	Power cord, battery, isokinetic probe, 3 m (10 ft) tubing, purge filter, printer paper, USB cable, alarm connector. Quick Start Guide, Operation Manual and TrakPro™ Lite Secure Software
External Surface	Stainless steel	Optional Accessories	Electronic filter scanning probe, basic filter scanning probe, additional battery, dual-port external battery charger, printer paper, isokinetic probes, sample tubing, shipping case
Analog Output Options	4 Channels 4-20 mA output: 3 User selectable particle sizes-linear or log-scale 1 Status channel		
Standards	CE, JIS B9921, ISO 21501-4		
Operating Range	34° to 95°F (1° to 35°C), 5% to 95% non-condensing		
Zero Count	<1 count / 5 minutes at the 95% UCL (per ISO 21501-4 and JIS)		
Sampling Duration	1 second to 24 hours, continuous		
Languages	English, French, German, Italian, Polish, Portuguese, Spanish, Chinese (Simplified), Japanese, Korean		
Status Indicator (LED Lightbar)	Sampling, Alert, Sampling Complete		
Alarm Output	Normal open dry contact rated 0 to 60 V AC/ DC, 1.5 A peak, 0.5 A continuous		

NO INTERRUPTIONS.
NO DATA LOSS.
NO-HASSLE COMPLIANCE.

Complete facility monitoring systems offered by TSI®.

Learn more at
tsi.com/reliablesystem

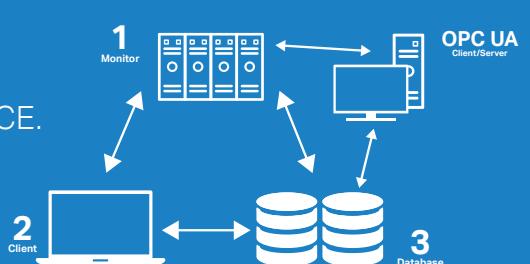

Knowledge Beyond Measure.

TSI Incorporated - Visit our website www.tsi.com for more information.

USA	Tel: +1 800 874 2811	India	Tel: +91 80 67877200
UK	Tel: +44 149 4 459200	China	Tel: +86 10 8219 7688
France	Tel: +33 1 41 19 21 99	Singapore	Tel: +65 6595 6388
Germany	Tel: +49 241 523030		