




Product Service

CERTIFICATE

No. Z2 118443 0023 Rev. 01

Holder of Certificate: **Jinko Solar Co., Ltd.**
No.1, Yingbin Road, Economic Development Zone
334100 Shangrao City, Jiangxi
PEOPLE'S REPUBLIC OF CHINA

Certification Mark:

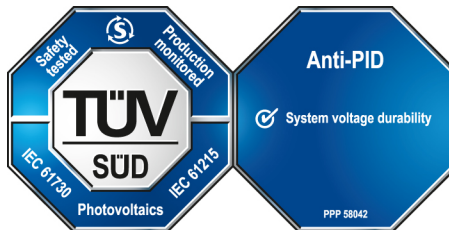

Product: **Crystalline Silicon Terrestrial Photovoltaic (PV) Modules**
Mono-Crystalline Silicon Photovoltaic Module

The product was tested on a voluntary basis and complies with the essential requirements. The certification mark shown above can be affixed on the product. It is not permitted to alter the certification mark in any way. In addition, the certification holder must not transfer the certificate to third parties. This certificate is valid until the listed date, unless it is cancelled earlier. All applicable requirements of the testing and certification regulations of TÜV SÜD Group have to be complied. For details see: www.tuvsud.com/ps-cert

Test report no.: 704062307411-01

Valid until: 2028-12-21

Date, 2024-01-04

(Zhulin Zhang)

ZERTIFIKAT ◆ CERTIFICATE ◆ 認證證書 ◆ CERTIFICADO ◆ CERTIFICAT

CERTIFICATE

No. Z2 118443 0023 Rev. 01

Model(s):

1500VDC system voltage:

JKMxxxM-78HL4-V (xxx=565-605, in steps of 5, 156 cells)
JKMxxxM-72HL4-V (xxx=475-585, in steps of 5, 144 cells)
JKMxxxM-66HL4-V (xxx=440-505, in steps of 5, 132 cells)
JKMxxxM-60HL4-V (xxx=400-485, in steps of 5, 120 cells)
JKMxxxM-54HL4-V (xxx=360-430, in steps of 5, 108 cells)
JKMxxxN-78HL4-V (xxx=570-650, in steps of 5, 156cells)
JKMxxxN-78HL4R-V (xxx=570-650, in steps of 5, 156cells)
JKMxxxN-78HL4-V-J (xxx=570-650, in steps of 5, 156cells)
JKMxxxN-72HL4-V (xxx=485-615, in steps of 5, 144 cells)
JKMxxxN-72HL4R-V (xxx=485-615, in steps of 5, 144 cells)
JKMxxxN-72HL4-V-J (xxx=485-615, in steps of 5, 144 cells)
JKBWxxxN-72HL4-V (xxx=485-600, in steps of 5, 144 cells)
JKMxxxN-66HL4-V (xxx=445-525, in steps of 5, 132 cells)
JKMxxxN-60HL4-V (xxx=405-510, in steps of 5, 120 cells)
JKMxxxN-60HL4R-V (xxx=405-510, in steps of 5, 120 cells)
JKMxxxN-60HL4-V-J (xxx=405-510, in steps of 5, 120 cells)
JKMxxxN-54HL4-V (xxx=365-455, in steps of 5, 108 cells)
JKMxxxN-54HL4R-V (xxx=365-455, in steps of 5, 108 cells)
JKMxxxN-66HL4M-V (xxx=600-625, in steps of 5, 132 cells)

1000VDC system voltage:

JKMxxxM-72HL4 (xxx=475-585, in steps of 5, 144 cells)
JKMxxxM-66HL4 (xxx=440-505, in steps of 5, 132 cells)
JKMxxxM-60HL4 (xxx=400-485, in steps of 5, 120 cells)
JKMxxxM-54HL4 (xxx=360-430, in steps of 5, 108 cells)
JKMxxxN-78HL4 (xxx=570-650, in steps of 5, 156cells)
JKMxxxN-78HL4R (xxx=570-650, in steps of 5, 156cells)
JKMxxxN-78HL4-J (xxx=570-650, in steps of 5, 156cells)
JKMxxxN-72HL4 (xxx=485-615, in steps of 5, 144 cells)
JKMxxxN-72HL4R (xxx=485-615, in steps of 5, 144 cells)
JKMxxxN-72HL4-J (xxx=485-615, in steps of 5, 144 cells)
JKBWxxxN-72HL4 (xxx=485-600, in steps of 5, 144 cells)
JKMxxxN-66HL4 (xxx=445-525, in steps of 5, 132 cells)
JKMxxxN-60HL4 (xxx=405-510, in steps of 5, 120 cells)
JKMxxxN-60HL4R (xxx=405-510, in steps of 5, 120 cells)
JKMxxxN-60HL4-J (xxx=405-510, in steps of 5, 120 cells)
JKMxxxN-54HL4 (xxx=365-455, in steps of 5, 108 cells)
JKMxxxN-54HL4R (xxx=365-455, in steps of 5, 108 cells)
JKMxxxN-66HL4M (xxx=600-625, in steps of 5, 132 cells)
xxx is standing for rated output power at STC



CERTIFICATE

No. Z2 118443 0023 Rev. 01

Parameters:

Fire Safety Class: Class C according to UL790.
 Safety Class: Class II
 Max. System Voltage: 1500 or 1000 V DC
 Construction: Framed, with Junction box, cable and connector.
 PID test condition: ±1500 V DC, 85 °C, 85 % RH, 288h
 PID testing method is according to IEC TS 62804-1:2015.

Production

Facility(ies):

074043, 075612, 115860, 115862, 115863, 105416

116025, 118612, 119487, 119488, 122742, 118443

Tested according to:

IEC 61215-1:2016
 IEC 61215-1-1:2016
 IEC 61215-2:2016
 IEC 61730-1:2016
 IEC 61730-2:2016
 PPP 58042B:2015