

Environmental Product Declaration (EPD)



Declaration Code: EPD-STA-22.0



agtatec ag

record system 20



Basis:

DIN EN ISO 14025
EN 15804

Company EPD
Environmental
Product Declaration

Publication date:
06 April 2016

Next revision:
06 April 2021





[www.ift-rosenheim.de/
erstelte-epds](http://www.ift-rosenheim.de/erstellte-epds)

Environmental Product Declaration (EPD)



Declaration Code: EPD-STA-22.0

Programme operator	ift Rosenheim GmbH Theodor Gietl Straße 7-9 D-83026 Rosenheim		
Practitioner of the LCA	ift Rosenheim GmbH Theodor Gietl Straße 7-9 D-83026 Rosenheim		
Declaration holder	agtatec ag Allmendstrasse 24 CH 8320 Fehraltorf		
Declaration code	EPD-STA-22.0		
Designation of declared product	record system 20		
Scope	Automatic sliding door systems of customisable design for the passage of persons for internal and external applications.		
Basis	This EPD was prepared on the basis of EN ISO 14025:2011 and EN 15804:2012+A1:2013. In addition, the "Allgemeiner Leitfaden zur Erstellung von Typ III Umweltproduktdeklarationen" (Guidance on preparing Type III Environmental Product Declarations) applies. This Declaration is based on the PCR document "Doors" (PCR-TT-1.1:2011).		
Validity	Publication date: 06 April 2016	Last revision: 06 April 2016	Next revision: 06 April 2021
	This verified Company Environmental Product Declaration (company EPD) applies solely to the specified products and is valid for a period of 5 years from the date of publication in accordance with DIN EN 15804.		
LCA basis	The LCA was prepared in accordance with DIN EN ISO 14040 and DIN EN ISO 14044. The base data include both the data collected at the agtatec ag production site and the generic data derived from the "GaBi ts" database. LCA calculations were based on the "cradle to gate" life cycle with options (cradle to gate with options) including all upstream processes (e.g. raw material extraction, etc.).		
Notes	The "Conditions and Guidance on the Use of ift Test Documents" apply. The declaration holder assumes full liability for the underlying data, certificates and verifications.		
			
Prof. Ulrich Sieberath Director of Institute	Florian Stich Verifier		



1 General product information

Product definition

The EPD relates to the product group “doors” and applies to the product:

“record system 20” from the company **agtatec ag**
The LCA was prepared using the declared unit:

1 m² area

This functional unit is declared as follows:
1,500 mm x 2,200 mm

Directly used material flows are assigned to the functional unit. All other inputs and outputs of “record system 20” were scaled to the declared unit since no typical functional unit was available due to the great diversity of variants. The reference period is the year 2014.

Product description

record system 20 is the latest generation of automatic sliding door systems.

record system 20 fulfills the requirements of the Machinery Directive 2006/42/EC; of DIN EN 18, EN 16 005 and EN 14351; and of all relevant national and international standards.

This environmental product declaration covers a double leaf design without side panels (2 sliding doors), including a sliding door drive comprised of control unit, motor, 2 combined release and safety sensors, battery pack and operating unit.

record sliding doors are available in a wide variety of functional specifications to meet the specialised application and operating requirements encountered in different types of building.


The slim profile system in combination with the matching glazing system ensures maximum transparency.

Furthermore, a great variety of finishes and colours are available, e.g. for door leaves, side panels and drive covers.

For a detailed product description refer to the manufacturer specifications at www.record.global or the product descriptions for the desired product.

Product group: Doors

Product manufacture

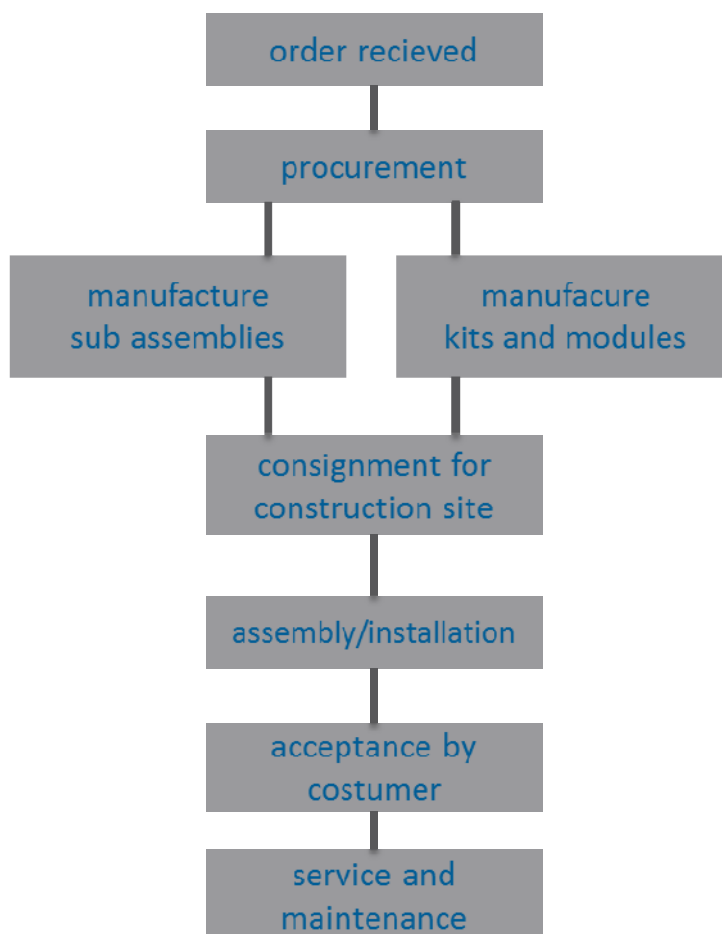

Application

Automatic sliding door systems of customisable design for the passage of persons for internal and external applications. The side panels are not considered part of the sliding doors.

Verification

record system 20 conforms to the essential safety and health protection requirements of the following Directives:

- Machinery Directive 2006/42/EC (Annex I)
- Low Voltage Directive 2006/95
- EMC Directive 2004/108/EC

The following harmonised standards are applied:

- DIN EN 16005:2013
- DIN 18650-1/-2:2010
- EN ISO 13849-1:2008
- DIN EN 60335-2-103:2010 in combination with DIN EN 16005:2013
- AutSchR:1997 (Directive for Automatic Sliding Doors) (sliding doors designed for emergency exit routes)

Management systems

The following management systems are in place:

- Quality management system as per DIN EN ISO 9001:2008
- Environmental management system as per DIN EN ISO 14001:2004

Additional information

record system 20 allows a great variety of door designs to be implemented, in some cases permitting combinations of characteristics



pertaining to the following to be achieved, depending on the place of application and the specific requirements:

- Use on escape and emergency exit routes
- Thermal insulation
- Burglar resistance
- Fire safety
- Smoke leakage
- Watertightness
- Resistance to wind load
- Air permeability
- Sound insulation
- etc.

2 Materials used

Primary materials

The primary materials used are listed in the LCA (see Section 7).

Declarable substances

The product contains no substances from the REACH candidate list (declaration dated 22 March 2016).

All relevant safety data sheets are available from the company agtatec ag.

3 Construction process stage

Processing recommendations, installation

Observe the instructions for assembly/installation, operation, maintenance and disassembly. Refer to www.record.global

4 Use stage

Emissions to the environment

No emissions to indoor air, water or soil are known.

Reference service life (RSL)

The RSL information was provided by the manufacturer. The RSL shall refer to the declared technical and functional performance of the product within the building. It shall be established in accordance with specific rules set out in the European product standards and shall also take into account ISO 15686-1, -2, -7 and -8. Where European product standards provide guidance on determining RSL, such guidance shall have priority. If it is not possible to determine the service life as the RSL in accordance with ISO 15686, the table "Nutzungsdauern von Bauteilen zur Lebenszyklusanalyse nach BNB" ("Service life of building components for life cycle analysis in accordance with the Sustainable Construction evaluation system" of the German Federal Institute for Research on Building, Urban Affairs and Spatial Development) can be used. For further information and explanations refer to www.nachhaltigesbauen.de.

For this EPD the following applies:

The reference service life (RSL) can be determined for a "cradle to gate - with options" EPD only if all of the modules A1-A3 and B1-B5 are specified;



According to the manufacturer, the product “record system 20” manufactured by agtatec ag has an optional service life of 10 years. This corresponds to approximately 1,000,000 closing cycles (according to the manufacturer) at approx. 100,000 closing cycles per year.

RSL is dependent on the characteristics of the product and reference in-use conditions. The applicable characteristics are as follows:

- Declared product characteristics: see Section 1 (General product information - Product definition)
- Design application parameters: see Section 4 (Construction process stage - processing recommendations) and Section 1 (General product information - Additional information)
- Assumed quality of work: see Section 4 (Construction process stage - processing recommendations) and Section 1 (General product information - Application)
- Outdoor environment: the following influences may have an impact on the reference service life: heat, air, wind, water
- Indoor environment: no impacts known that have a negative effect on the reference service life
- In-use conditions: see Section 9 (Annex). The reference service life applies only to the referenced in-use conditions
- Maintenance: see Section 9 (Annex/B2 - Maintenance)

The service life applies solely to the characteristics specified in this EPD or the corresponding references.

RSL does not reflect the actual life span, which is usually determined by the service life and when the building is renovated. It does not provide any indication of durability, nor does it constitute a warranty with regard to the product’s performance characteristics, nor any kind of guarantee.

5 End-of-life stage

Possible end-of-life stages

The product record system 20 is shipped to central collecting points. There it is usually shredded and sorted into its original pure components. Aluminium, steel, glass, etc. are recycled. Residual fractions are thermally recycled.

Disposal routes

The LCA includes the average disposal routes.

All life cycle scenarios are detailed in the Annex.



6 Life Cycle Assessment (LCA)

Environmental product declarations are based on life cycle analyses (LCAs), which use material and energy flows for the calculation and subsequent representation of environmental impacts.

As the basis for this, a Life Cycle Analysis (LCA) was prepared for the product record system 20. The LCA is in conformity with EN 15804 and the requirements set out in the international standards DIN EN ISO 14040, DIN EN ISO 14044, ISO 21930 and EN ISO 14025.

The LCA is representative of the products presented in the Declaration and the specified reference period.

6.1 Definition of goal and scope

Goal

The goal of the LCA is to demonstrate the environmental impacts of the product "record system 20". In accordance with EN 15804, the environmental impacts covered by this Environmental Product Declaration are presented in the form of basic information for the entire product life cycle. Apart from these, no other environmental impacts have been specified/presented.

Data quality, data availability, and geographical and time-related system boundaries

The specific data originate exclusively from the fiscal year 2015. They were collected on-site at the plant located in Fehrltorf and originate partly from company records and partly from values directly obtained by measurement. Validity of the data was checked by the ift.

The generic data originate from the GaBi ts professional and construction materials databases. The last update of both databases was in 2016. Data before this date originate also from these databases and are not more than 4 years old. No other generic data were used for the calculation.

Data gaps were either filled with comparable data or conservative assumptions, or the data were cut off in compliance with the 1% rule.

The life cycle was modelled using the sustainability software tool "GaBi t" for the development of Life Cycle Assessments.

Scope/system boundaries

The system boundaries refer to the supply of raw materials and purchased parts, manufacture/production, use and end-of-life stage of the product record system 20 (cradle to gate with options). No additional data from pre-suppliers/subcontractors or other sites were taken into consideration.

Cut-off criteria

All company data collected, i.e. all commodities/input and raw materials used, the thermal energy and electricity consumption, were taken into consideration.

The boundaries cover only the production-relevant data. Building

sections/parts of facilities that are not relevant to the manufacture of the products were excluded.

The transport distances of the primary products/pre-products were taken into consideration as a function of at least 99% of the mass of the product record system 20.

The criteria for the exclusion of inputs and outputs as set out in EN 15804 are fulfilled. It can be assumed that the total of negligible processes per life cycle stage does not exceed 1 percent of the mass/primary energy. This way the total of negligible processes does not exceed 5 percent of the energy and mass input. The life cycle calculation also includes material and energy flows that account for less than 1 percent.

6.2 Inventory analysis

Goal

All material and energy flows are described below. The processes covered are presented as input and output parameters and refer to the declared/functional unit.

Life cycle stages

The Annex illustrates the entire life cycle of the product record system 20. The modules are shown as described in the Annex.

Benefits

The following benefits have been defined as per EN 15804:

- Benefits from recycling
- Benefits (thermal and electrical) from incineration

Allocation procedures Allocation of co-products

The manufacture of the product record system 20 does not produce any allocations.

Allocations for re-use, recovery and recycling

If the product record system 20 is reused/recycled during the product stage (rejects), the components are shredded and then sorted into their original pure components, as necessary. This is realised by various process plants, e.g. magnetic separators. The system boundaries of record system 20 were set following their disposal, with termination of their waste characteristics.

Allocations beyond life cycle boundaries

Use of recycled materials in the manufacturing process was based on the current market-specific situation. In parallel to this, a recycling potential was taken into consideration that reflects the economic value of the product after recycling (recyclate). The system boundary set for the recycled material refers to collection.

Secondary material

The use of secondary materials by the company agtatec ag in Module A3 was considered. Secondary material is not used.

Inputs

The LCA includes the following production-relevant inputs:

Energy


The electricity mix is based on "Switzerland electricity mix".

Water

The water consumed by the individual process steps for the manufacture of record system 20 amounts to a total of 0.5 l per m² unit. The consumption of fresh water specified in Section 6.3 originates from (among other sources) the upstream processes of the primary products/pre-products.

Raw material/primary products/pre-products

The chart below show the share of raw materials/pre-products in %.

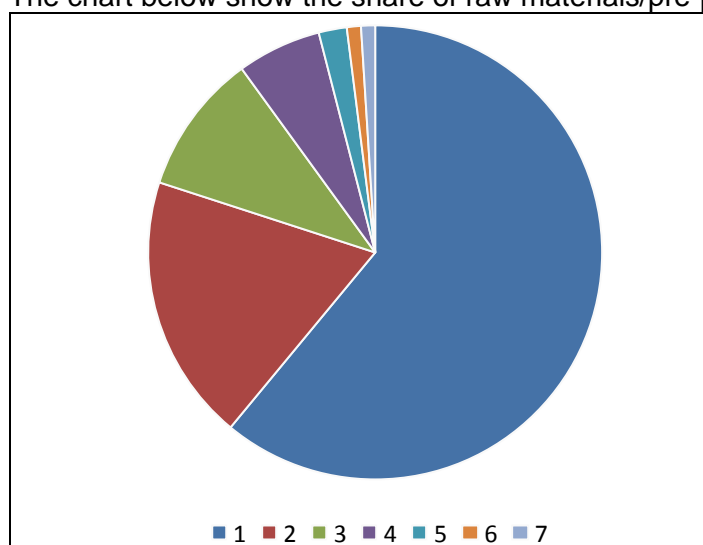

No.	Material	Mass in %
1	Glass	61
2	Aluminium	19
3	Steel	10
4	Plastics	6
5	Motor	2,5
6	Battery	1,5
7	Other	1

Table 1: Share of individual materials in percent

Outputs

The LCA includes the following production-relevant outputs per m² of record system 20:

Waste

Secondary raw materials were included in the benefits. See Section 6.3 (Impact assessment)

Waste water

The manufacture of the product record system 20 produces 0.5 l of



waste water per m².

6.3 Impact assessment

Goal

The impact assessment covers inputs and outputs. The impact categories applied are named below:

Impact categories

The models for impact assessment were applied as described in EN 15804-A1.

The impact categories presented in the EPD are as follows:

- Depletion of abiotic resources (fossil fuels);
- Depletion of abiotic resources (elements);
- Acidification of soil and water;
- Ozone depletion;
- Global warming;
- Eutrophication;
- Photochemical ozone creation.

Waste

The waste generated during the production of 1 m² of record system 20 is evaluated and shown separately for each of the three main fractions, namely trade wastes, special wastes and radioactive wastes. Since waste handling is modelled within the system boundaries, the amounts shown refer to the deposited wastes. A portion of the waste indicated is generated during the manufacture of the pre-products. The wastes presented are generated throughout the entire product life cycle.

Product group: Doors

Results per m ² of record system 20 (Part 1)																
Environmental impacts	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D*)
Global warming potential (GWP)	kg CO ₂ -equiv.	111	0.306	1.07	-	1.85	-	-	-	362	0	0	0.112	2.86	3.91	-83.2
Ozone depletion potential of stratospheric layer (ODP)	kg R11-equiv.	4.18E-06	1.41E-12	5.77E-11	-	6.15E-12	-	-	-	9.02E-07	0	0	5.14E-13	2.03E-09	1.21E-11	-2.10E-08
Acidification potential of soil and water (AP)	kg SO ₂ -equiv.	0.723	1.33E-03	2.62E-04	-	2.49E-03	-	-	-	0.658	0	0	6.81E-04	7.95E-03	2.91E-03	-0.375
Eutrophication potential (EP)	kg PO ₄ ³ -equiv.	0.0571	3.27E-04	2.32E-04	-	1.81E-03	-	-	-	0.1	0	0	1.70E-04	7.11E-04	4.12E-04	-0.0236
Formation potential of tropospheric ozone photo-chemical oxidants (POCP)	kg C ₂ H ₄ -equiv.	5.02E-03	-4.56E-04	6.58E-05	-	1.47E-04	-	-	-	0.0506	0	0	-2.83E-04	5.48E-04	2.87E-04	-0.0276
Abiotic depletion potential - non-fossil resources (ADP - elements)	kg Sb-equiv.	7.88E-03	2.04E-08	5.41E-08	-	5.02E-07	-	-	-	3.87E-04	0	0	7.44E-09	9.33E-07	1.73E-07	-3.35E-05
Abiotic depletion potential - fossil fuels (ADP - fossil resources)	MJ	1300	4.22	0.615	-	2.88	-	-	-	3410	0	0	1.54	30.9	6.18	-925
Use of resources	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D*)
Use of renewable primary energy - excluding renewable primary energy resources used as raw materials	MJ	160	0.24	0.505	-	0.424	-	-	-	7120	0	0	0.0875	13.9	0.739	-370
Use of renewable primary energy resources used as raw materials (material use)	MJ	0	0	0	-	0	-	-	-	0	0	0	0	0	0	0
Total use of renewable primary energy resources (primary energy and renewable primary energy resources used as raw materials) (energy + material use)	MJ	160	0.24	0.505	-	0.424	-	-	-	7120	0	0	0.0875	13.9	0.739	-370
Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials	MJ	1560	0	0	-	0	-	-	-	0	0	0	0	0	0	0
Use of non-renewable primary energy resources used as raw materials (material use)	MJ	0	0	0	-	0	-	-	-	0	0	0	0	0	0	0
Total use of non-renewable primary energy resources (primary energy and non-renewable primary energy resources used as raw materials) (energy + material use)	MJ	1560	4.24	1.25	-	3.13	-	-	-	12900	0	0	1.55	49.8	6.46	-1080
Use of secondary materials	kg	0	0	0	-	0	-	-	-	0	0	0	0	0	0	0



Product group: Doors

Results per m ² of record system 20 (Part 2)																
Use of resources	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D*)
Use of renewable secondary fuels	MJ	-0.0596	1.38E-05	1.46E-04	-	6.90E-04	-	-	-	0.362	0	0	5.03E-06	5.81E-04	0.0112	0.0732
Use of non-renewable secondary fuels	MJ	-0.938	2.10E-04	6.36E-04	-	7.65E-03	-	-	-	5.48	0	0	7.65E-05	8.79E-03	0.0229	1.22
Use of net fresh water	m ³	0.853	6.01E-04	3.18E-03	-	0.0131	-	-	-	9.9	0	0	2.19E-04	0.0215	0.00872	-1
Waste categories	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D*)
Hazardous waste disposed	kg	9.25E-06	3.20E-07	2.79E-09	-	1.93E-08	-	-	-	1.07E-05	0	0	1.17E-07	3.16E-08	1.38E-07	-1.03E-06
Non-hazardous waste disposed (municipal waste)	kg	4.15	3.56E-04	0.176	-	0.603	-	-	-	16.8	0	0	1.30E-04	0.03	28	-18.4
Radioactive waste	kg	0.0878	6.06E-06	2.45E-04	-	1.01E-04	-	-	-	3.68	0	0	2.21E-06	7.51E-03	1.12E-04	-0.0596
Output material flows	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D*)
Components for re-use	kg	0	0	0	-	0	-	-	-	0	0	0	0	0	0	0
Materials for recycling	kg	0	0	0	-	0	-	-	-	0	0	0	0	17.7	0	0
Materials for energy recovery	kg	0	0	0	-	0	-	-	-	0	0	0	0	4.43	0	0
Exported energy (electricity)	MJ	1.69	0	1.17	-	0	-	-	-	0	0	0	0	0	0	0
Exported energy (thermal energy)	MJ	3.97	0	2.77	-	0	-	-	-	0	0	0	0	0	0	0

6.4 Interpretation, LCA presentation and critical verification

Evaluation

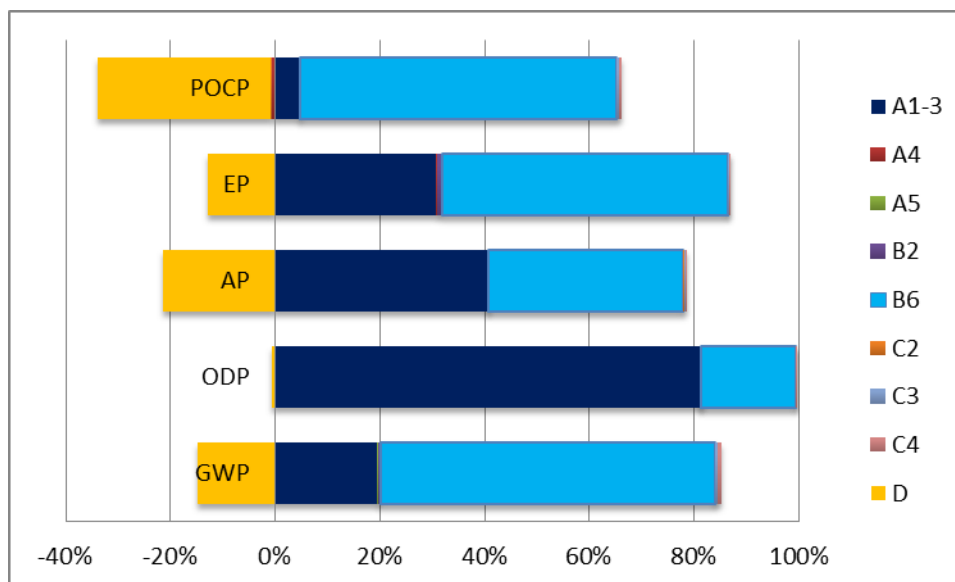


Figure 1: Distribution of environmental impacts

The essential environmental impacts of record system 20 occur during the manufacturing stage (modules A1 – A3), with aluminium and glass being the main contributors.

For the use stage, the modules B2 and B6 were examined; here the module B6 dominates as a result of the electricity consumed by the drive during the life cycle.

For scenario C4 only marginal consumption values arising from the physical pre-treatment and management of the disposal site are expected. Allocation to specific products is almost impossible for site disposal.

As regards the recycling of record system 20, almost two thirds of the environmental impacts occurring during manufacture can be assigned as benefits to scenario D.

The values obtained from the LCA calculation are suitable for the certification of buildings.

Report

The LCA underlying this EPD was developed according to the requirements set out in DIN EN ISO 14040 and DIN EN ISO 14044 as well as EN 15804 and EN ISO 14025. For reasons of confidentiality, it is not addressed to third parties. It is deposited with the ift Rosenheim. The results and conclusions reported to the target group are complete, correct, without bias and transparent. The results of the study are not designed to be used for comparative statements intended for publication.

Critical verification

The LCA was critically verified by Mr Florian Stich, an independent

ift verifier.

7 General information regarding the EPD

Comparability

This EPD was prepared in accordance with EN 15804 and is therefore only comparable with those EPDs that also comply with the requirements set out in EN 15804.

Any comparison must refer to the building context and the same boundary conditions of the various life cycle stages.

For comparing EPDs of construction products, the rules set out in EN 15804 (Clause 5.3) apply.

Communication

The communications format of this EPD meets the requirements of EN 15942:2011 and is therefore the basis for B2B communication. Only the nomenclature has been changed according to EN 15804.

Verification

Verification of the Environmental Product Declaration is documented in accordance with the ift "Richtlinie zur Erstellung von Typ III Umweltproduktdeklarationen" (Guidance on preparing Type III Environmental Product Declarations) in accordance with the requirements set out in EN ISO 14025.

This Declaration is based on the ift PCR document "Doors" (PCR-TT-1.1 : 2011).

The European standard EN 15804 serves as the core PCR ^{a)}
Independent verification of the declaration and statement according to EN ISO 14025:2010 <input checked="" type="checkbox"/> internal <input type="checkbox"/> external
Independent third party verifier: ^{b)} Florian Stich
^{a)} Product category rules ^{b)} Optional for business-to-business communication, mandatory for business-to-consumer communication (see EN ISO 14025:2010, 9.4)

Revisions of this document

No.	Date	Note:	Practitioner of the LCA	Verifier
1	06.04.2016	First internal verification and approval	F. Stöhr	F. Stich
2				
3				

Bibliography

- [1] Ökologische Bilanzierung von Baustoffen und Gebäuden – Wege zu einer ganzheitlichen Bilanzierung (LCA of building materials and buildings - Routes to integrated LCA)
Published by: Eyerer, P., Reinhardt, H.-W.
Birkhäuser Verlag, Basel, 2000
- [2] Leitfaden Nachhaltiges Bauen (Guidance on Sustainable Building).
Published by: German Federal Ministry of Transport, Building and Housing.
Berlin, 2013
- [3] GaBi 6: Software und Datenbank zur Ganzheitlichen Bilanzierung (Gabi 6: Software and database for LCA)
Published by: IKP Universität Stuttgart and PE Europe GmbH.
Leinfelden-Echterdingen, 1992 – 2014
- [4] Ökobilanzen (LCA).
Klöppfer, W.; Grahl, B.
Wiley-VCH-Verlag, Weinheim, 2009
- [5] EN 15804:2012+A1:2013
Sustainability of construction works - Environmental product declarations - Rules for the product categories.
Beuth Verlag GmbH, Berlin
- [6] EN 15942:2011
Sustainability of construction works – Environmental product declaration – Communication format business-to-business
Beuth Verlag GmbH, Berlin
- [7] ISO 21930:2007-10
Sustainability in building construction - Environmental declaration of building products
Beuth Verlag GmbH, Berlin
- [8] Leitfaden zur Planung und Ausführung der Montage von Fenstern und Haustüren (Guide to planning and implementing the installation of windows and external pedestrian doorsets).
Published by: RAL-Gütegemeinschaft Fenster und Haustüren e.V.
Frankfurt, 2010
- [9] EN ISO 14025:2011-10
Environmental labels and declarations - Type III environmental declarations - Principles and procedures.
Beuth Verlag GmbH, Berlin
- [10] EN ISO 16000-9:2006-08
Indoor air - Part 9: Determination of the emission of volatile organic compounds from building products and furnishing - Emission test chamber method
Beuth Verlag GmbH, Berlin
- [11] EN ISO 16000-11:2006-08
Indoor air - Part 11: Determination of the emission of volatile organic compounds from building products and furnishing - Sampling, storage of samples and preparation of test specimens.
Beuth Verlag GmbH, Berlin
- [12] DIN ISO 16000-6:2004-08
Indoor air - Part 6: Determination of volatile organic compounds in indoor and test chamber air by active sampling on Tenax TA® sorbent, thermal desorption and gas chromatography using MS/FID.
Beuth Verlag GmbH, Berlin
- [13] DIN EN ISO 14040:2009-11
Environmental management - Life cycle assessment - Principles and framework.
Beuth Verlag GmbH, Berlin
- [14] DIN EN ISO 14044:2006-10
Environmental management - Life cycle assessment - Requirements and guidelines.
Beuth Verlag GmbH, Berlin
- [15] prEN 14351-2:2009-05
Windows and doors - Product standard, performance characteristics - Part 2: Internal pedestrian doorsets without resistance to fire and/or smoke leakage characteristics.
Beuth Verlag GmbH, Berlin
- [16] prEN 16034:2010-01
Pedestrian doorsets, industrial, commercial, garage doors and windows - Product standard, performance characteristics - Fire resistance and/or smoke control characteristics.
Beuth Verlag GmbH, Berlin
- [17] DIN EN 12457-1:2003-01
Characterization of waste - Leaching; Compliance test for leaching of granular waste materials and sludges - Part 1: One stage batch test at a liquid to solid ratio of 2 l/kg and with particle size below 4 mm (without or with size reduction)
Beuth Verlag GmbH, Berlin
- [18] DIN EN 12457-2:2003-01
Characterization of waste - Leaching; Compliance test for leaching of granular waste materials and sludges - Part 2: One stage batch test at a liquid to solid ratio of 10 l/kg and with particle size below 4 mm (without or with size reduction)
Beuth Verlag GmbH, Berlin

- [19] DIN EN 12457-3:2003-01
Characterization of waste - Leaching;
Compliance test for leaching of granular waste materials and sludges - Part 3: Two stage batch test at a liquid to solid ratio of 2 l/kg and 8 l/kg for materials with high solid content with particle size below 4 mm (without or with size reduction).
Beuth Verlag GmbH, Berlin
- [20] DIN EN 12457-4:2003-01
Characterization of waste - Leaching;
Compliance test for leaching of granular waste materials and sludges - Part 4: One stage batch test at a liquid to solid ratio of 10 l/kg for materials with particle size below 10 mm (without or with size reduction)
Beuth Verlag GmbH, Berlin
- [21] DIN EN 13501-1:2010-01
Fire classification of construction products and building elements – Part 1: Classification using test data from reaction to fire tests.
Beuth Verlag GmbH, Berlin
- [22] DIN EN 14351-1:2010-08
Windows and doors - Product standard, performance characteristics - Part 1: Windows and external pedestrian doorsets without resistance to fire and/or smoke leakage characteristics.
Beuth Verlag GmbH, Berlin
- [23] DIN 4102-1:1998-09
Fire behaviour of building materials and building components - Part 1: Building materials; concepts, requirements and tests.
Beuth Verlag GmbH, Berlin
- [24] OENORM S 5200:2009-04-01
Radioactivity in construction materials.
Beuth Verlag GmbH, Berlin
- [25] DIN/CEN TS 14405:2004-09
Characterization of waste - Leaching behaviour tests - Up-flow percolation test (under specified conditions).
Beuth Verlag GmbH, Berlin
- [26] VDI 2243:2002-07
Recycling-oriented product development.
Beuth Verlag GmbH, Berlin
- [27] Commission Directive 2009/2/EC
amending, for the purpose of its adaptation to technical progress, for the 31st time, Council Directive 67/548/EEC on the approximation of the laws, regulations and administrative provisions relating to the classification, packaging and labelling of dangerous substances (15 January 2009).
- [28] ift Guideline NA-01/3
Allgemeiner Leitfaden zur Erstellung von Typ III Umweltproduktdeklarationen (Guidance on preparing Type III Environmental Product Declarations).
ift Rosenheim, August 2014
- [29] Arbeitsschutzgesetz – ArbSchG (Safety at Work Law)
Gesetz über die Durchführung von Maßnahmen des Arbeitsschutzes zur Verbesserung der Sicherheit und des Gesundheitsschutzes der Beschäftigten bei der Arbeit (Law on the implementation of occupational health and safety measures to improve the safety and health protection of employees at work), 5 February 2009 (BGBl. I p.160, 270)
- [30] Bundesimmissionsschutzgesetz – BImSchG (Federal Immission Law)
Gesetz zum Schutz vor schädlichen Umwelteinwirkungen durch Luftverunreinigungen, Geräusche, Erschütterungen und ähnlichen Vorgängen (Law on harmful environmental impacts by air contamination, noise, vibrations and similar processes), 26 September 2002 (BGBl. I p. 3830)
- [31] Chemikaliengesetz – ChemG (Chemicals Act)
Gesetz zum Schutz vor gefährlichen Stoffen (Law on protection against hazardous substances) – subdivided into Chemicals Act and a series of regulations; of relevance here: Gesetz zum Schutz vor gefährlichen Stoffen (Law on protection against hazardous substances), 2 July 2008 (BGBl. I p. 1146)
- [32] Chemikalien-Verbotsverordnung – ChemVerbotsV (Chemicals Prohibition Regulation)
Verordnung über Verbote und Beschränkungen des Inverkehrbringens gefährlicher Stoffe, Zubereitungen und Erzeugnisse nach dem Chemikaliengesetz (Regulation on bans and restrictions of the placing on the market of hazardous substances, formulations and products covered by the Chemicals Act), 21 July 2008 (BGBl. I p. 1328)
- [33] Gefahrstoffverordnung – GefStoffV (Hazardous substances regulation)
Verordnung zum Schutz vor Gefahrstoffen (Regulation on protection against hazardous substances), 23 December 2004 (BGBl. I p. 3758)
- [34] PCR Doors. Product Category Rules as per ISO 14025 and EN 15804.
ift Rosenheim, July 2011
- [35] Research project: “EPDs für transparente Bauelemente” (EPDs for transparent building components).



Product group: Doors

ift Rosenheim, 2011

- [36] Electric motors for mobile applications, Study
EMPA, TSL Technology and Society Lab @
EMPA
Schweizerische Materialprüfungs- und
Forschungsanstalt (Swiss Federal Laboratories
for Materials Science and Technology)



8 Annex

Description of life cycle scenarios for record system 20

Product stage			Construction stage		Use stage							End-of-life stage				Benefits and loads beyond the system boundaries
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Raw material supply	Transport	Manufacture	Transport	Construction/Installation	Use	Inspection, maintenance, cleaning	Repair	Exchange/Replacement	Improvement/Modernisation	Operational energy use	Operational water use	Deconstruction	Transport	Waste management	Disposal	Re-use Recovery Recycling potential
✓	✓	✓	✓	✓	—	✓	—	—	—	✓	—	—	✓	✓	✓	✓

Calculation of the scenarios was based on a service life of 10 years (in accordance with RSL indicated in Section 4 – Use stage).

The scenarios were based on information provided by the manufacturer. The scenarios were furthermore based on the research project “EPDs for transparent building components” [35].

Note: The standard scenarios selected are presented in bold type. They were also used for calculating the indicators in the summary table.

- ✓ Included in analysis
- Excluded from analysis

Product group: Doors

A4 Transport to the construction site

No.	Scenario	Description
A4	Direct shipment to construction site/branch	40 t truck Euro 4, 80 percent capacity used, approx. 144 km to domestic construction site and return trip with 10 percent load Weight: 44.3 kg/m ²

A5 Construction/Installation

No.	Scenario	Description
A5	Small lifting trolley/lifting platform	Small lifting platform/lifting trolley is required for the installation of record system 20. Installation includes the water used for initial cleaning.

In case of deviating consumption during installation/assembly of the products which forms part of the site management, they are covered at the building level.

Environmental impacts occur in the selected scenarios, resulting from the use of packaging material.

Benefits from A5 are not allocated to A5.

Waste is handled accordingly. It is assumed that the Installation module allocates the packaging material to waste handling. Waste is recycled partially:

Timber is disposed to site; unsorted plastics are thermally recycled.

B2 Inspection, maintenance, cleaning

B2.1 Cleaning

No.	Scenario	Description
B2.1	Rarely manual	Manually using suitable detergents, approx. 20 l of water, annually

Ancillary materials, consumables, energy use and waste as well as transport distances during cleaning are negligible (see summary table).

B2.2 Maintenance

No.	Scenario	Description
B2.2	Normal use	Annual functional check, visual inspection and, if necessary, repair.

Ancillary materials, consumables and waste materials as well as transport distances during maintenance are negligible. Fresh water and energy are not used for maintenance.

B6 Operational energy use

No.	Scenario	Description
B6	Power-operated Normal use	Per drive mechanism: 105 W/cycle (incl. standby mode) of electricity in 10 years --> 1 million cycles corresponds to 2,385 kWh in 10 years

Consumption in connection with operational energy use is given in the summary table.

Product group: Doors

C1 Deconstruction

No.	Scenario	Description
C1	Deconstruction	record system 20 99% deconstruction; The energy consumed during deconstruction is negligible. Any consumption arising is marginal.

No relevant inputs or outputs apply to the scenario selected.

C2 Transport

No.	Scenario	Description
C2	Transport	Transport to collecting point using 40 t truck, 80% capacity used, 50 km distance

C3 Waste management

No.	Scenario	Description
C3	Disposal	Deglazing (90%), recirculation of aluminium (82%), recirculation of remaining metals (82%) Residual fraction in waste incineration plant

The below table presents the disposal processes and their percentage by mass/weight. The calculation is based on the above mentioned shares in percent related to the declared unit of the product system.

C3 Disposal		
	Unit	C3
Collection process, collected separately	kg	0
Collection process, collected as mixed construction waste	kg	40.1
Recovery system, for re-use	kg	0
Recovery system, for recycling	kg	8.86
Recovery system, for energy recovery	kg	3.32
Disposal	kg	27.9
Assumptions for scenario development e.g. for transport	Appropriate units	-

C4 Disposal		
No.	Scenario	Description
C4	Disposal	The non-measurable quantities and losses of the re-use/recycling chain (C1 and C3) are modelled as “disposed”. The consumption is marginal and cannot be quantified.
<p>The consumption in scenario C4 results from physical pre-treatment, waste recycling and management of the disposal site. The benefits obtained here from the substitution of primary material production are allocated to module D, e.g. electricity and heat from waste incineration.</p>		

D Benefits and loads beyond the system boundaries (optional)		
No.	Scenario	Description
D	Recycling potential	Aluminium recyclate from C3.1 excluding the recyclate used in A3 replaces 100% of aluminium compound; Steel scrap from C3.1 excluding the scrap used in A3 replaces 100% of steel; Glass recyclate from C3.1 excluding the glass shards used in A3 replace 100% of glass; Benefits from waste incinerator: electricity replaces Switzerland electricity mix; thermal energy replaces thermal energy from natural gas

Imprint

Practitioner of the LCA

ift Rosenheim GmbH
Theodor Gietl Straße 7-9
D-83026 Rosenheim

Programme operator

ift Rosenheim GmbH
Theodor-Gietl-Str. 7-9
D-83026 Rosenheim
Phone: +49 (0) 0 80 31/261-0
Fax: +49 (0) 0 80 31/261 290
email: info@ift-rosenheim.de
www.ift-rosenheim.de

Declaration holder

agtatec ag
Allmendstrasse 24
CH 8320 Fehraltorf

Notes

This EPD is mainly based on the work and findings of the Institut für Fenstertechnik e.V., Rosenheim (ift Rosenheim) and specifically on the ift-Richtlinie NA-01/3 Allgemeiner Leitfaden zur Erstellung von Typ III Umweltproduktdeklarationen (Guideline NA.01/3 - Guidance on preparing Type III Environmental Product Declarations)
The publication and all its parts are protected by copyright. Any utilisation outside the confined limits of the copyright provisions is not permitted without the consent of the publishers and is punishable. In particular, this applies to any form of reproduction, translations, storage on microfilm or storage and processing in electronic systems.

Layout

ift Rosenheim GmbH, 2015

Photos (front page)

agtatec ag

© ift Rosenheim, 2015



ift Rosenheim GmbH
Theodor-Gietl-Str. 7-9
D-83026 Rosenheim
Phone: +49 (0) 80 31/261-0
Fax: +49 (0) 80 31/261-290
email: info@ift-rosenheim.de
www.ift-rosenheim.de

ZERTIFIKAT CERTIFICATE

Hiermit wird bescheinigt, dass die Firma / *This certifies that the company*

agtatec ag
Allmendstrasse 24
8320 Fehraltorf
Schweiz


berechtigt ist, das unten genannte Produkt mit dem abgebildeten Zeichen zu kennzeichnen
is authorized to provide the product mentioned below with the mark as illustrated

Fertigungsstätte
Manufacturing plant

Siehe Anlage 2
See annex 2

Beschreibung des Produktes
(Details s. Anlage 1)
Description of product
(Details see Annex 1)

**Automatische Schiebetüren und automatische Schiebetüren mit
und ohne Drehbeschlag zum Einsatz in Flucht- und
Rettungswegen, System 20**
*Automatic sliding doors and automatic sliding doors with
and without break-out mechanism, intended for use on escape and
rescue routes, System 20*



Geprüft nach
Tested in accordance with

EN 16005:2012/AC:2015
DIN 18650-1:2005-12 und 2010-06
DIN 18650-2:2005-12 und 2010-06
EN ISO 13849-1:2015
EN 60335-2-103:2015
AutSchR:1997-12

Registrier-Nr. / *Registered No.* 44 780 12756622
Prüfbericht Nr. / *Test Report No.* 3529 5247
Aktenzeichen / *File reference* 8003031741

Gültigkeit / *Validity*
von / *from* 2022-05-18
bis / *until* 2027-05-17


Zertifizierungsstelle der
TÜV NORD CERT GmbH

Essen, 2022-05-18

TÜV NORD CERT GmbH

Am TÜV 1

45307 Essen

www.tuev-nord-cert.de

technology@tuev-nord.de

Bitte beachten Sie auch die umseitigen Hinweise
Please also pay attention to the information stated overleaf

Hinweise zum TÜV NORD- Zertifikat

Dieses TÜV NORD - Zertifikat gilt nur für die umseitig bezeichnete Firma, das angegebene Produkt und die genannte Fertigungsstätte. Es kann nur von der Zertifizierungsstelle auf Dritte übertragen werden.

Das Recht zum Benutzen des umseitig abgebildeten Zeichens erstreckt sich nur auf solche Produkte, welche mit dem erfolgreich geprüften Baumuster und den Angaben im Prüfbericht oder den ergänzenden Vereinbarungen übereinstimmen.

Notwendige Bedienungs- und Montageanweisungen müssen jedem Produkt beigelegt werden.

Jedes Produkt muss deutlich einen Hinweis auf den Hersteller oder Importeur und eine Typenbezeichnung tragen, damit die Identität des geprüften Baumusters mit den serienmäßig in den Verkehr gebrachten Produkten festgestellt werden kann.

Der Inhaber des TÜV NORD - Zertifikates ist verpflichtet, die Fertigung der mit dem Zeichen versehenen Produkte laufend auf Übereinstimmung mit den Prüfbestimmungen zu überwachen und insbesondere die in den Prüfbestimmungen festgelegten oder von der Zertifizierungsstelle geforderten Kontrollprüfungen ordnungsgemäß durchzuführen.

Für das TÜV NORD - Zertifikat gelten außer den vorgeannten Bedingungen auch alle übrigen Bestimmungen des allgemeinen Vertrages. Es hat solange Gültigkeit, wie die Regeln der Technik gelten, die der Prüfung zu Grunde gelegt worden sind, sofern es nicht auf Grund der Bedingungen des allgemeinen Vertrages früher zurückgezogen wird.

Dieses TÜV NORD - Zertifikat verliert seine Gültigkeit und muss unverzüglich der Zertifizierungsstelle zurückgegeben werden, falls es ungültig wird oder für ungültig erklärt wird.

Hints to the TÜV NORD - Certificate

This TÜV NORD - certificate is applicable only to the firm stated overleaf, the specified product, and the manufacturing plants stated. It can be transferred to third parties only by the certification body.

The right to use the approval mark shown overleaf is granted only for those products which are identical with the prototype that has passed the test, the statements in the test report and the supplementary agreements.

Each product must be accompanied by the instructions which are necessary for its operation and installation. Each product must bear a distinct indication of the manufacturer or importer and a type designation so that the identity of the tested prototype with the series product brought on the market can be checked.

The recipient of the TÜV NORD - Certificate shall currently supervise the manufacture of the products provided with the approval mark for compliance with the test specifications and particularly shall properly conduct the checks which are stated in the specifications or required by the test laboratory.

In addition to the conditions stated above, all other provisions of the General Agreement are applicable to the TÜV NORD - Certificate. It will be valid as long as the rules of technology on which the test was based are valid, unless it is revoked before pursuant to the provisions of the General Agreement.

The TÜV NORD - Certificate will become invalid and shall be returned to the certification body without delay when it has expired or revoked.

ANLAGE ANNEX

Anlage 1, Seite 1 von 6
Annex 1, page 1 of 6

zum Zertifikat Registrier-Nr. / to Certificate Registration No. 44 780 12756622

Allgemeine Angaben:
General Information:

Siehe Seite 1 des Zertifikates
See also page 1 of the Certificate

Typbezeichnung:
Type designation:

Automatische Schiebetüren mit:

- Standard-Antrieb ein- und zweiflügelig: System 20 STA
- Teleskop-Antrieb zwei und vierflügelig: System 20 TSA
- Schubstangenantrieb zwei- und vierflügelig: System 20 SSA
- Totalöffnungssystem: System 20 TOS
- Faltflügelmechanik: System 20 FTA/FBO
- Unterflur-Antrieb ein- und zweiflügelig: System S20 SU

Automatic sliding doors with:

- standard drive for one-leaf or two-leaf doors: system 20 STA
- telescopic drive for two-leaf or four-leaf doors: system 20 TSA
- slide bar drive for two-leaf and four-leaf doors: system 20 SSA
- break-out system: system 20 TOS
- folding wing system: system 20 FTA/FBO
- under-floor drive for one-leaf or two-leaf doors: system S20 SU


Zertifizierungsstelle der
TÜV NORD CERT GmbH

Essen, 2022-05-18

ANLAGE ANNEX

Anlage 1, Seite 2 von 6
Annex 1, page 2 of 6

zum Zertifikat Registrier-Nr. / to Certificate Registration No. 44 780 12756622

Steuerung / Control-unit	STM 20	STM 20 RED/DUO	STM 21	STM 21 RED	STM 22 RED/DUO
Nennspannung [V AC]: Nominal Voltage [V AC]:	90 – 230	100 – 240	230	90 – 240	230
Nennfrequenz [Hz]: Nominal Frequency [Hz]:	50/60	50/60	50/60	50/60	50/60
Nennleistung [W]: Rated Power [W]:	140	90	85	90	120
Schutzklasse: Protection Class:	I	I	I	I	I
Schutzart: Degree of Protection:	IP20	IP20	IP20	IP20	IP20
Arbeitstemperatur [°C]: Operating Temperature [°C]:	-15 ... +50	-15 ... +50	-15 ... +50	-15 ... +50	-15 ... +50

Konfigurationen:
Configurations:

Unter Verwendung des Profilsystems System 20 (20 mm und 32 mm), THERMCORD/THERMCORD+/THERMCORD3 (38 mm), sowie INDISY 20, 30, Systemverglasung SVG32 und Profilsystemen mit mindestens $l_x=14 \text{ cm}^4$ und $l_y=10 \text{ cm}^4$ (Material EN AW-6060T66 oder besser nach EN755-2) und des rahmenlosen Türsystems STA 20 Frameless (10 mm ESG)
Using system 20 profile system (20 mm and 32 mm), THERMCORD/THERMCORD+/THERMCORD3 (38 mm), as well as INDISY 20, 30, SVG32 system glazing and profile systems with at least $l_x=14 \text{ cm}^4$ and $l_y=10 \text{ cm}^4$ (material EN AW-6060T66 or better according to EN 755-2) and the frameless door system STA 20 Frameless (10 mm ESG)

Die Typbezeichnungen ... RED/ kennzeichnen Typen, die als automatische Schiebetüren ohne Drehbeschlag zum Einsatz in Rettungswegen geeignet sind.

Antriebseinheiten mit Bremse sind für Flucht- und Rettungswege geeignet.

Alle Typen des System 20-TOS sind als automatische Schiebetüren mit Drehbeschlägen (Break-Out Funktion) zum Einsatz in Rettungswegen geeignet

Type designations ...RED/ denote types which are suitable for escape routes as automatic sliding doors without break-out mechanism.

Drive units with brake are suitable for escape and rescue routes.

All the types of system 20 TOS are suitable for escape routes as automatic sliding doors with break-out function.

Essen, 2022-05-18


Zertifizierungsstelle der
TÜV NORD CERT GmbH

ANLAGE ANNEX

Anlage 1, Seite 3 von 6
Annex 1, page 3 of 6

zum Zertifikat Registrier-Nr. / to Certificate Registration No. 44 780 12756622

Konfigurationen:
Configurations:

System 20 STA:

	max. Flügelgewicht in kg / max. door leaf weight in kg			
Typ	STA 21	STA 20	STA 20 RED/DUO	STA 22 RED/DUO
D-STA	2x75	2x120 (2x120)	2x150 (2x150)	(2x200)
E-STA	1x120	1x150 (1x200)	1x150 (1x200)	(1x250)

Werte in Klammern bei Antriebskastenhöhe 200 mm.

Values in brackets for operator height 200 mm

	Lichte Weite in mm / Clear width of passage in mm		
Typ	STA 21	STA 20, STA 20 RED/DUO	STA 22 RED/DUO
D-STA	800-2500	800-3000	800-3000
E-STA	800-2000	800-3000	800-3000

System 20 TSA:

	max. Flügelgewicht in kg / max. door leaf weight in kg			
Typ	STA 21	STA 20	STA 20 RED/DUO	STA 22 RED/DUO
D-TSA	4x50	4x80 (4x80)	4x90 (4x90)	(4x130)
E-TSA	2x80	2x90 (2x130)	2x120 (2x130)	(2x170)

Werte in Klammern bei Antriebskastenhöhe 200 mm.

Values in brackets for operator height 200 mm

	Lichte Weite in mm / Clear width of passage in mm		
Typ	STA 21	STA 20, STA 20 RED/DUO	STA 22 RED/DUO
D-TSA	1440-3000	1440-4000 (1200-4000)	(1440-4000)
E-TSA	800-2500	800-3000 (800-4000)	(800-4000)

Werte in Klammern bei Antriebskastenhöhe 200 mm.

Values in brackets for operator height 200 mm


Zertifizierungsstelle der
TÜV NORD CERT GmbH

Essen, 2022-05-18

ANLAGE ANNEX

Anlage 1, Seite 4 von 6
Annex 1, page 4 of 6

zum Zertifikat Registrier-Nr. / to Certificate Registration No. 44 780 12756622

Konfigurationen:

Configurations:

System 20 SSA:

Typ	max. Flügelgewicht in kg / max. door leaf weight in kg			
	STA 21	STA 20	STA 20 RED/DUO	STA 22 RED/DUO
D-STA	2x75	2x120	2x150	(2x200)
D-TSA	4x50	4x80	4x90	(4x130)

Werte in Klammern bei Antriebskastenhöhe 200 mm.

Values in brackets for operator height 200 mm

Typ	Lichte Weite in mm / Clear width of passage in mm		
	STA 21	STA 20, STA 20 RED/DUO	STA 22 RED/DUO
D-STA	800-2500	800-3000 (800-3000)	(800-3000)
D-TSA	1440-3000	1440-4000 (1200-4000)	(1440-4000)

Werte in Klammern bei Antriebskastenhöhe 200 mm.

Values in brackets for operator height 200 mm

System 20 TOS:

Typ	max. Flügelgewicht in kg / max. door leaf weight in kg		
	STA 20	STA 20 RED/DUO	STA 22 RED/DUO
D-TOS	2x120(2x120)	2x120 (2x150)	(2x200)
E-TOS	1x150(1x200)	1x150 (1x200)	(1x250)

Werte in Klammern bei Antriebskastenhöhe 200 mm.

Values in brackets for operator height 200 mm

Typ	Lichte Weite in mm / Clear width of passage in mm		
	STA 20	STA 20 RED/DUO	STA 22 RED/DUO
D-TOS	800-2500	800-2500 (800-2500)	(800-2500)
E-TOS	800-1250	800-1250 (800-1250)	(800-1250)

Werte in Klammern bei Antriebskastenhöhe 200 mm.

Values in brackets for operator height 200 mm



Zertifizierungsstelle der
TÜV NORD CERT GmbH

Essen, 2022-05-18

ANLAGE ANNEX

Anlage 1, Seite 5 von 6
Annex 1, page 5 of 6

zum Zertifikat Registrier-Nr. / to Certificate Registration No. 44 780 12756622

Konfigurationen:
Configurations:

System S20 SU:

max. Flügelgewicht in kg / max. door leaf weight in kg			
Typ	STA 20 SU	STA 20 SU RED/DUO	STA 22 SU RED/DUO
D-STA	2 x 120	2 x 150	2 x 200
E-STA	1 x 150	1 x 200	1 x 250

Lichte Weite in mm / Clear width of passage in mm			
Typ	STA 20 SU	STA 20 SU RED/DUO	STA 22 SU RED/DUO
D-STA	800 – 3000	800 – 3000	800 – 3000
E-STA	800 – 3000	800 – 3000	800 – 3000

max. Flügelneigung aus der Vertikalen: $\pm 10^\circ$

max. door leaf inclination from vertical: $\pm 10^\circ$

IP44 System S20 SU Antriebsmodul / drive module

System 20 FTA/FBO:

	FTA	FBO	E-FTA-L	E-FTA-R
max. Flügelgewicht in kg max. door leaf weight in kg	4 x 37,5	4 x 37,5	2 x 37,5	2 x 37,5
Lichte Weite in mm Clear width of passage in mm	800-2000	800-2000	800-1000	650-1000
Lichte Höhe in mm Clear height of passage in mm	max. 2500	max. 2500	max. 2500	max. 2500

Faltflügeltüren des System 20 FBO sind kraftbetätigte Türen mit Break-Out-Funktion zum Einsatz in Rettungswegen im Geltungsbereich der AutSchR:1997-12. Die Verwendung einer Zuhaltung, um den Break-Out Mechanismus zu hemmen, ist nicht Bestandteil des Zertifizierungsumfangs.

Folding wing doors of system 20 FBO are suitable for escape routes as power operated doors with break-out function in the scope of AutSchR:1997-12. Use of a locking function to inhibit the break out mechanism is not within the scope of the certification.

Essen, 2022-05-18


Zertifizierungsstelle der
TÜV NORD CERT GmbH

ANLAGE ANNEX

Anlage 1, Seite 6 von 6
Annex 1, page 6 of 6

zum Zertifikat Registrier-Nr. / to Certificate Registration No. 44 780 12756622

Konfigurationen:
Configurations:

STA 20 Frameless:

	D-STA	E-STA
max. Flügelgewicht in kg* max. door leaf weight in kg*	2 x 90	1 x 90
Lichte Weite in mm* Clear width of passage in mm*	800 - 3000	800 - 2500
Lichte Höhe in mm Clear height of passage in mm	3000	3000

* Max. Türdimensionen in Abhängigkeit vom max. Türflügelgewicht

* Max. door dimensions depending on max. door leaf weight


Zertifizierungsstelle der
TÜV NORD CERT GmbH

Essen, 2022-05-18

ANLAGE ANNEX

Anlage 2, Seite 1 von 1
Annex 2, page 1 of 1

zum Zertifikat Registrier-Nr. / to Certificate Registration No. 44 780 12756622

Liste der Fertigungsstätten:
List of manufacturing facilities:

1. agtatec ag
Allmendstrasse 24
8320 Fehraltorf
Schweiz
2. record Türautomation GmbH
Otto-Wels-Straße 9
42111 Wuppertal
Deutschland
3. record automatic door(shanghai)co., ltd
#5 No. 1969 Huibin Road,
Qingpu Industrial Zone
201707 Shanghai, P.R.C.

(Diese Liste beinhaltet 3 Fertigungsstätte.)
(This list includes three manufacturing facility.)

A handwritten signature in black ink, appearing to read "F. Hegensfeld".

Zertifizierungsstelle der
TÜV NORD CERT GmbH

Essen, 2022-05-18