



FCC Part15, Subpart B

TEST REPORT

For

NETWORK VIDEO DECODER

MODEL NUMBER: NVD0905DH, DH-NVD0905DH, NVD0905DH-4K, DH-NVD0905DH-4K, NVD0905DH-4I-4K, DH-NVD0905DH-4I-4K

And

DH-NVD0905DH-4K,OEM-NVD0905DH-4K,DHI-NVD0905DH-4K, NVD0905DH-4K, DH-NVD0905DH-4K-A,DH-NVD0905DH-4K-B,DH-NVD0905DH-4K-C,DH-NVD0905DH-4K-D, DH-NVD0905DH-4K-E,DH-NVD0905DH-4K-F,DH-NVD0905DH-4K-G,DH-NVD0905DH-4K-H, DH-NVD0905DH-4K-I,DH-NVD0905DH-4K-J,DH-NVD0905DH-4K-K,DH-NVD0905DH-4K-L, DH-NVD0905DH-4K-M,DH-NVD0905DH-4K-N,DH-NVD0905DH-4K-O,DH-NVD0905DH-4K-P, DH-NVD0905DH-4K-Q,DH-NVD0905DH-4K-R,DH-NVD0905DH-4K-S,DH-NVD0905DH-4K-T, DH-NVD0905DH-4K-U,DH-NVD0905DH-4K-V,DH-NVD0905DH-4K-W,DH-NVD0905DH-4K-X, DH-NVD0905DH-4K-Y,DH-NVD0905DH-4K-Z,DH-NVD0905DH-4I-4K,OEM-NVD0905DH-4I-4K, DHI-NVD0905DH-4I-4K,NVD0905DH-4I-4K, DH-NVD0905DH-4I-4K-A,DH-NVD0905DH-4I-4K-B,DH-NVD0905DH-4I-4K-C,DH-NVD0905DH-4I-4K-D, DH-NVD0905DH-4I-4K-E,DH-NVD0905DH-4I-4K-F,DH-NVD0905DH-4I-4K-G,DH-NVD0905DH-4I-4K-H, DH-NVD0905DH-4I-4K-I,DH-NVD0905DH-4I-4K-J,DH-NVD0905DH-4I-4K-K,DH-NVD0905DH-4I-4K-L, DH-NVD0905DH-4I-4K-M,DH-NVD0905DH-4I-4K-N,DH-NVD0905DH-4I-4K-O,DH-NVD0905DH-4I-4K-P, DH-NVD0905DH-4I-4K-Q,DH-NVD0905DH-4I-4K-R,DH-NVD0905DH-4I-4K-S,DH-NVD0905DH-4I-4K-T, DH-NVD0905DH-4I-4K-U,DH-NVD0905DH-4I-4K-V,DH-NVD0905DH-4I-4K-W,DH-NVD0905DH-4I-4K-X, DH-NVD0905DH-4I-4K-Y,DH-NVD0905DH-4I-4K-Z

REPORT NUMBER: 4788991120-1

ISSUE DATE: May 27, 2019

Prepared for

Zhejiang Dahua Vision Technology Co., Ltd.

No.1199, Bin'an road, Binjiang District, Hangzhou, P.R.China.

The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report apply to the test sample(s) mentioned above at the time of the testing period only and are not to be used to indicate applicability to other similar products. This report does not imply that the product(s) has met the criteria for certification.



Prepared by

**UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch
Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-
Tech Development Zone Dongguan, 523808, People's Republic of China**

Tel: +86 769 22038881

Fax: +86 769 33244054

Website: www.ul.com



Revision History

Rev.	Issue Date	Revisions	Revised By
--	5/27/2019	Initial Issue	



Summary of Test Results				
Standard	Test Item	Limit	Result	Remark
FCC Part15, Subpart B ANSI C63.4-2014	Conducted Disturbance	Class B	PASS	
	Radiated Disturbance below 1 GHz	Class B	PASS	
	Radiated Disturbance above 1 GHz	Class B	PASS	
<p>Note,</p> <p>The model, DH-NVD0905DH-4K,OEM-NVD0905DH-4K,DHI-NVD0905DH-4K, NVD0905DH-4K,DH-NVD0905DH-4K-A,DH-NVD0905DH-4K-B,DH-NVD0905DH-4K-C,DH-NVD0905DH-4K-D, DH-NVD0905DH-4K-E,DH-NVD0905DH-4K-F,DH-NVD0905DH-4K-G,DH-NVD0905DH-4K-H, DH-NVD0905DH-4K-I,DH-NVD0905DH-4K-J,DH-NVD0905DH-4K-K,DH-NVD0905DH-4K-L, DH-NVD0905DH-4K-M,DH-NVD0905DH-4K-N,DH-NVD0905DH-4K-O,DH-NVD0905DH-4K-P, DH-NVD0905DH-4K-Q,DH-NVD0905DH-4K-R,DH-NVD0905DH-4K-S,DH-NVD0905DH-4K-T, DH-NVD0905DH-4K-U,DH-NVD0905DH-4K-V,DH-NVD0905DH-4K-W,DH-NVD0905DH-4K-X,DH-NVD0905DH-4K-Y,DH-NVD0905DH-4K-Z, DH-NVD0905DH-4I-4K,OEM-NVD0905DH-4I-4K, DHI-NVD0905DH-4I-4K,NVD0905DH-4I-4K DH-NVD0905DH-4I-4K-A,DH-NVD0905DH-4I-4K-B,DH-NVD0905DH-4I-4K-C,DH-NVD0905DH-4I-4K-D, DH-NVD0905DH-4I-4K-E,DH-NVD0905DH-4I-4K-F,DH-NVD0905DH-4I-4K-G,DH-NVD0905DH-4I-4K-H, DH-NVD0905DH-4I-4K-I,DH-NVD0905DH-4I-4K-J,DH-NVD0905DH-4I-4K-K,DH-NVD0905DH-4I-4K-L, DH-NVD0905DH-4I-4K-M,DH-NVD0905DH-4I-4K-N,DH-NVD0905DH-4I-4K-O,DH-NVD0905DH-4I-4K-P, DH-NVD0905DH-4I-4K-Q,DH-NVD0905DH-4I-4K-R,DH-NVD0905DH-4I-4K-S,DH-NVD0905DH-4I-4K-T, DH-NVD0905DH-4I-4K-U,DH-NVD0905DH-4I-4K-V,DH-NVD0905DH-4I-4K-W,DH-NVD0905DH-4I-4K-X,DH-NVD0905DH-4I-4K-Y,DH-NVD0905DH-4I-4K-Z ,are the same as the original model number, only difference being the item numbers, the detail test status, please refer the test report (report no.: SEFD1609042), which was issued by Cerpess Technology Corporation on Oct 31,2016.</p>				

CONTENTS

1. ATTESTATION OF TEST RESULTS.....	6
2. TEST METHODOLOGY.....	8
3. ACCREDITATION	8
4. MEASURING EQUIPMENT AND SOFTWARE USED.....	8
5. EMISSION TEST	9
5.1. <i>Conducted Disturbance Measurement.....</i>	<i>9</i>
5.1.1. Limits of conducted disturbance voltage	9
5.1.2. Test Procedure	9
5.1.3. Test Setup	10
5.1.4. Test Results.....	11
5.2. <i>Radiated Disturbance Measurement.....</i>	<i>13</i>
5.2.1. Limits of radiated disturbance measurement.....	13
5.2.2. Test Procedure	14
5.2.3. Test Setup	14
5.2.4. Test Results – below 1GHz.....	16
5.2.5. Test Results – above 1GHz	18
Appendix I: Photographs of Test Configuration	20
Appendix II: Photographs of the EUT	23



1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: Zhejiang Dahua Vision Technology Co., Ltd.
Address: No.1199, Bin'an road, Binjiang District, Hangzhou, P.R.China.

Manufacturer Information

Company Name: Zhejiang Dahua Vision Technology Co., Ltd.
Address: No.1199, Bin'an road, Binjiang District, Hangzhou, P.R.China.

EUT Information

EUT Name: NETWORK VIDEO RECORDER
Model: NVD0905DH-4I-4K
Series Model: NVD0905DH, DH-NVD0905DH, NVD0905DH-4K, DH-NVD0905DH-4K, DH-NVD0905DH-4I-4K and DH-NVD0905DH-4K, OEM-NVD0905DH-4K, DHI-NVD0905DH-4K, NVD0905DH-4K, DH-NVD0905DH-4K-A, DH-NVD0905DH-4K-B, DH-NVD0905DH-4K-C, DH-NVD0905DH-4K-D, DH-NVD0905DH-4K-E, DH-NVD0905DH-4K-F, DH-NVD0905DH-4K-G, DH-NVD0905DH-4K-H, DH-NVD0905DH-4K-I, DH-NVD0905DH-4K-J, DH-NVD0905DH-4K-K, DH-NVD0905DH-4K-L, DH-NVD0905DH-4K-M, DH-NVD0905DH-4K-N, DH-NVD0905DH-4K-O, DH-NVD0905DH-4K-P, DH-NVD0905DH-4K-Q, DH-NVD0905DH-4K-R, DH-NVD0905DH-4K-S, DH-NVD0905DH-4K-T, DH-NVD0905DH-4K-U, DH-NVD0905DH-4K-V, DH-NVD0905DH-4K-W, DH-NVD0905DH-4K-X, DH-NVD0905DH-4K-Y, DH-NVD0905DH-4K-Z, DH-NVD0905DH-4I-4K, OEM-NVD0905DH-4I-4K, DHI-NVD0905DH-4I-4K, NVD0905DH-4I-4K, DH-NVD0905DH-4I-4K-A, DH-NVD0905DH-4I-4K-B, DH-NVD0905DH-4I-4K-C, DH-NVD0905DH-4I-4K-D, DH-NVD0905DH-4I-4K-E, DH-NVD0905DH-4I-4K-F, DH-NVD0905DH-4I-4K-G, DH-NVD0905DH-4I-4K-H, DH-NVD0905DH-4I-4K-I, DH-NVD0905DH-4I-4K-J, DH-NVD0905DH-4I-4K-K, DH-NVD0905DH-4I-4K-L, DH-NVD0905DH-4I-4K-M, DH-NVD0905DH-4I-4K-N, DH-NVD0905DH-4I-4K-O, DH-NVD0905DH-4I-4K-P, DH-NVD0905DH-4I-4K-Q, DH-NVD0905DH-4I-4K-R, DH-NVD0905DH-4I-4K-S, DH-NVD0905DH-4I-4K-T, DH-NVD0905DH-4I-4K-U, DH-NVD0905DH-4I-4K-V, DH-NVD0905DH-4I-4K-W, DH-NVD0905DH-4I-4K-X, DH-NVD0905DH-4I-4K-Y, DH-NVD0905DH-4I-4K-Z♣

♣

Please refer to Page 4 of this report which indicates which item was actually tested and which were electrically identical



APPLICABLE STANDARDS	
STANDARDS	TEST RESULTS
FCC Part15, Subpart B ANSI C63.4-2014	PASS

Prepared By:

Gary Zhang
Engineer Project Associate

Checked By:

Shawn Wen
Laboratory Leader

Approved By:

Stephen Guo
Laboratory Manager



2. TEST METHODOLOGY

All tests were performed in accordance with the standard FCC Part15 Subpart B, ANSI C63.4-2014.

3. ACCREDITATION

Accreditation Certificate	<p>A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA.</p> <p>FCC (FCC Recognized No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules</p> <p>IC(Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with Industry Canada. The Company Number is 21320.</p> <p>VCCI (Registration No.: G-20019, R-20004, C-20012 and T-20011) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber D, the VCCI registration No. is G-20019 and R-20004 Shielding Room B , the VCCI registration No. is C-20012 and T-20011</p>
---------------------------	---

4. MEASURING EQUIPMENT AND SOFTWARE USED

All measuring equipment and software used are referred to the original report (report no.: SEFD1609042), which was issued by Cerpass Technology Corporation.

5. EMISSION TEST

5.1. Conducted Disturbance Measurement

5.1.1. Limits of conducted disturbance voltage

FREQUENCY (MHz)	Class A (dB μ V)		Class B (dB μ V)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46*
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

5.1.2. Test Procedure


- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item: Photographs of Test Configuration.

5.1.3. Test Setup

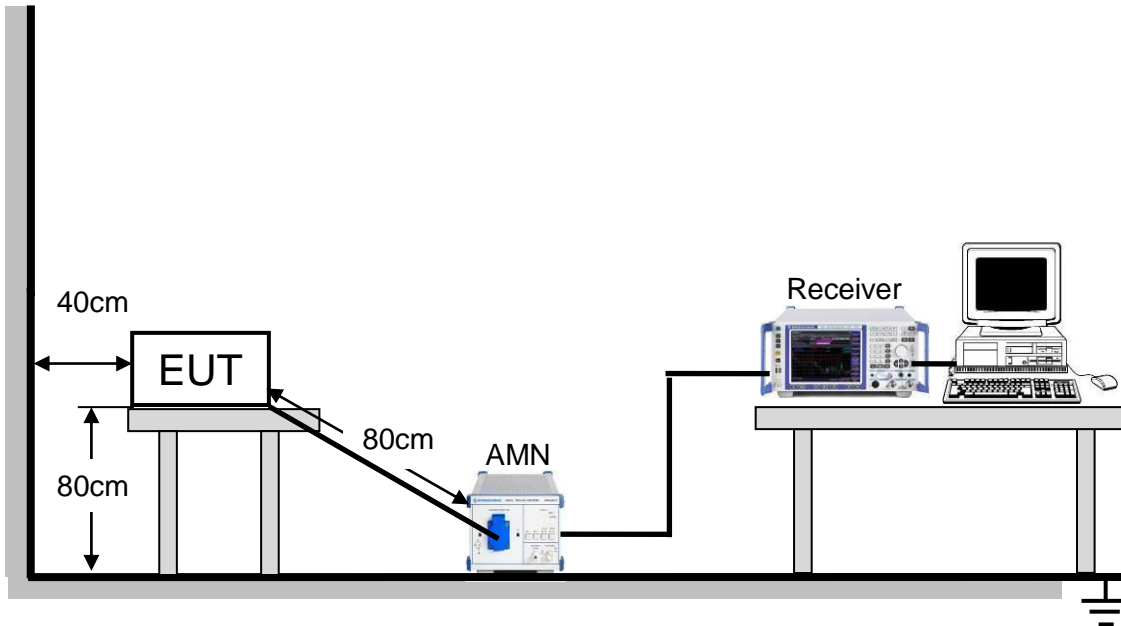

5.1.4. Test Results

Test Mode :	Mode 1: Mode 1: Full system with vision signal of HDMI 1		
AC Power :	AC 120V/60Hz	Phase :	LINE
Equipment :	NETWORK VIDEO DECODER	Model No :	NVD0905DH-4I-4K
Temperature :	25°C	Humidity :	56%
Pressure(mbar) :	1002	Date :	2016/10/27

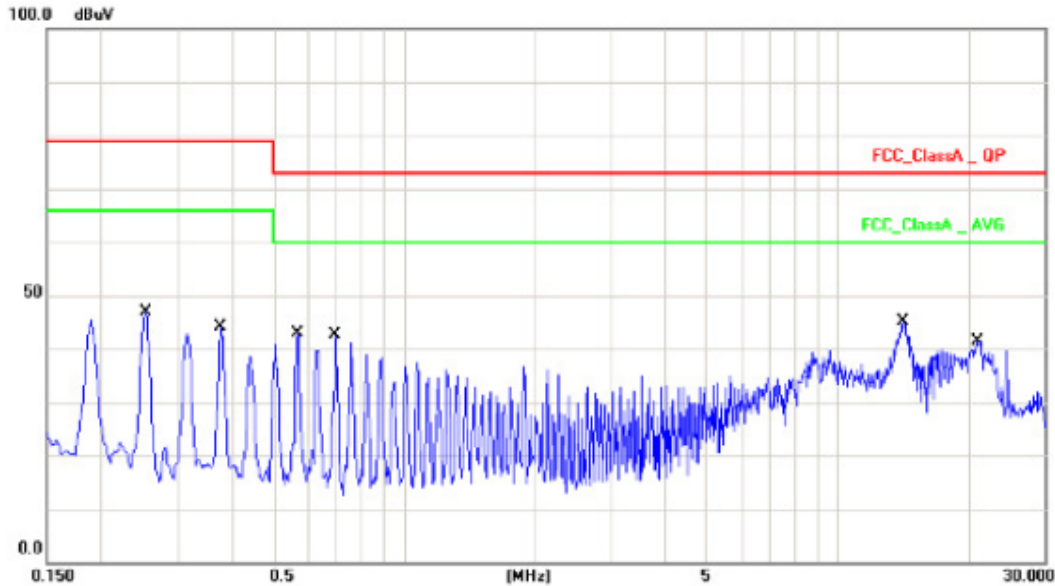


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2540	10.13	35.67	45.80	79.00	-33.20	QP
2	0.2540	10.13	33.97	44.10	66.00	-21.90	AVG
3	0.3780	10.15	32.70	42.85	79.00	-36.15	QP
4	0.3780	10.15	27.28	37.43	66.00	-28.57	AVG
5	0.5700	10.16	31.26	41.42	73.00	-31.58	QP
6	0.5700	10.16	24.62	34.78	60.00	-25.22	AVG
7	0.6940	10.15	31.64	41.79	73.00	-31.21	QP
8	0.6940	10.15	27.33	37.48	60.00	-22.52	AVG
9	14.1460	10.48	33.27	43.75	73.00	-29.25	QP
10	14.1460	10.48	30.34	40.82	60.00	-19.18	AVG
11	20.9660	10.36	28.96	39.32	73.00	-33.68	QP
12	20.9660	10.36	25.88	36.24	60.00	-23.76	AVG

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 1: Mode 1: Full system with vision signal of HDMI 1		
AC Power :	AC 120V/60Hz	Phase :	NEUTRAL
Equipment :	NETWORK VIDEO DECODER	Model No :	NVD0905DH-4I-4K
Temperature :	25°C	Humidity :	56%
Pressure(mbar) :	1002	Date :	2016/10/27

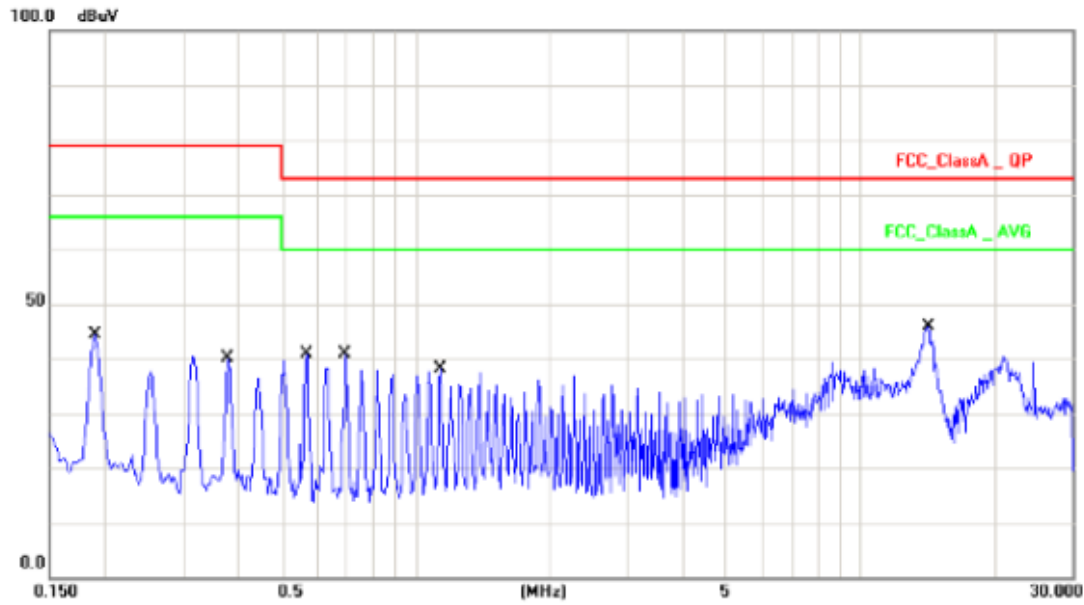

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1900	10.13	33.31	43.44	79.00	-35.56	QP
2	0.1900	10.13	28.91	39.04	66.00	-26.96	AVG
3	0.3780	10.15	28.58	38.73	79.00	-40.27	QP
4	0.3780	10.15	22.33	32.48	66.00	-33.52	AVG
5	0.5700	10.15	29.12	39.27	73.00	-33.73	QP
6	0.5700	10.15	22.52	32.67	60.00	-27.33	AVG
7	0.6940	10.16	30.03	40.19	73.00	-32.81	QP
8	0.6940	10.16	25.80	35.96	60.00	-24.04	AVG
9	1.1380	10.18	25.68	35.86	73.00	-37.14	QP
10	1.1380	10.18	20.17	30.35	60.00	-29.65	AVG
11	14.1460	10.49	32.82	43.31	73.00	-29.69	QP
12	14.1460	10.49	29.56	40.05	60.00	-19.95	AVG

Note: Measurement Level = Reading Level + Correct Factor

Remark: All test results are referred to the original report SEFD1609042 which was issued by Cerpas Technology Corporation.

5.2. Radiated Disturbance Measurement

5.2.1. Limits of radiated disturbance measurement

Below 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	Class A		Class B
	Field strength (uV/m) (at 10m)	Field strength (dBuV/m) (at 3m)	Field strength (dBuV/m) (at 3m)
30 - 88	90	49.5	40
88 - 216	150	53.9	43.5
216 - 960	210	56.9	46
Above 960	300	60	54

Above 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	Class A				Class B	
	(dBuV/m) (at 3m)		(dBuV/m) (at 10m)		(dBuV/m) (at 3m)	
	Peak	Average	Peak	Average	Peak	Average
Above 1000	80	60	69.5	49.5	74	54

Frequency Range of Radiated Disturbance Measurement

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 - 108	1000
108 - 500	2000
500 - 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

NOTE:


- (1) The limit for radiated test was performed according to FCC Part 15, Subpart B;
- (2) The tighter limit applies at the band edges;
- (3) Emission level (dBuV/m) = 20log Emission level (uV/m),

5.2.2. Test Procedure


- The measuring distance of at 10m shall be used for measurements at frequency up to 1GHz.
- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

5.2.3. Test Setup

(a) Radiated Disturbance Test Set-Up Frequency 30MHz - 1GHz

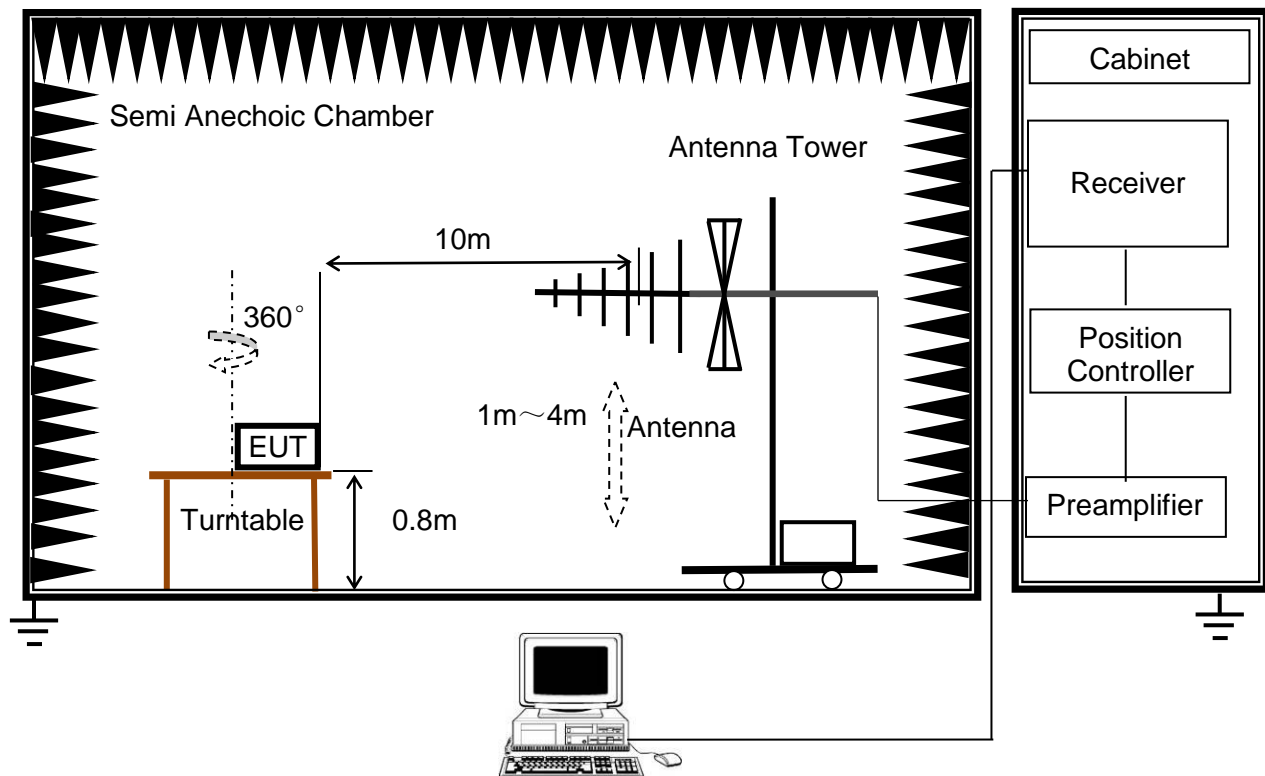


(b) Radiated Disturbance Test Set-Up Frequency above 1GHz

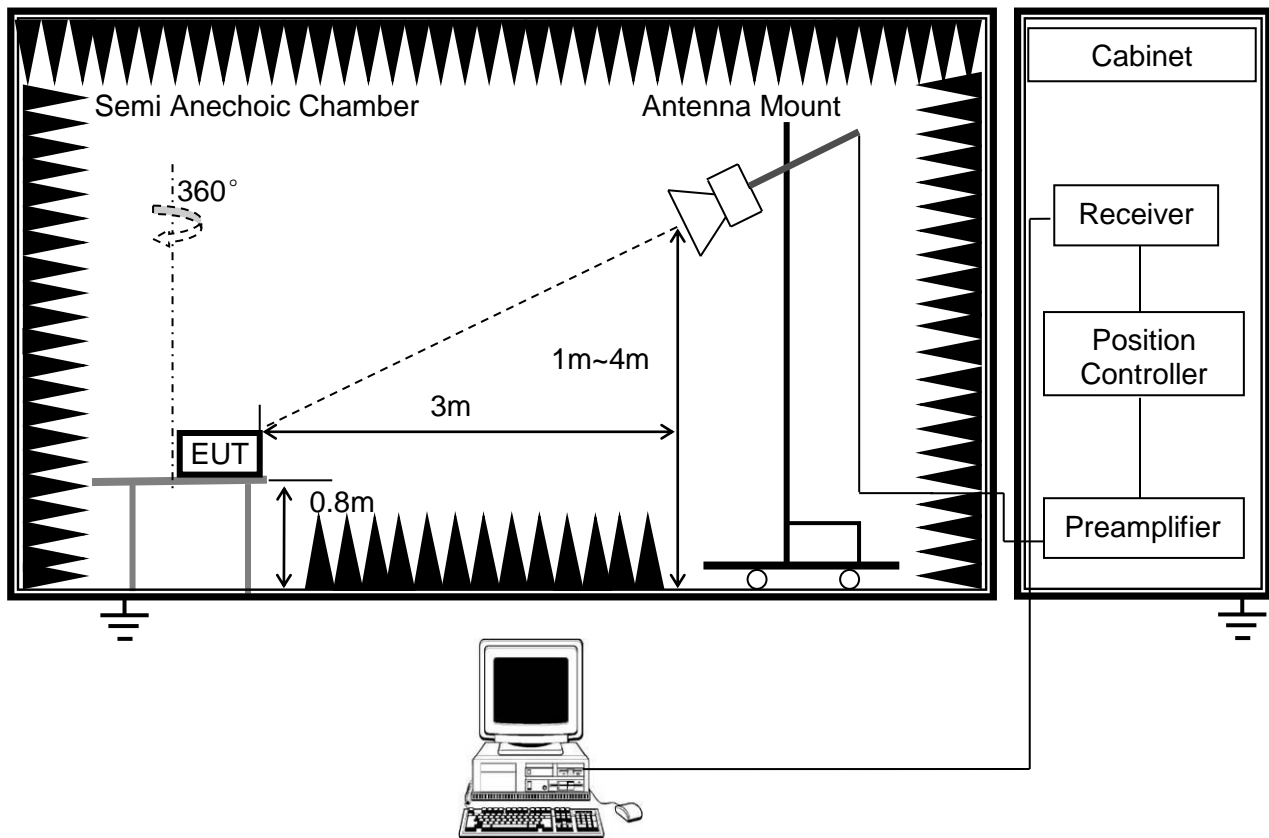



5.2.4. Test Results – below 1GHz

Test Mode :	Mode 1: Full system with vision signal of HDMI 1		
AC Power :	AC 120V/60Hz	Ant. Polarization:	Horizontal
Equipment :	NETWORK VIDEO DECODER	Model No :	NVD0905DH-4I-4K
Temp :	25°C	Humidity :	53%
Pressure(mbar) :	1002	Date :	2016/10/29

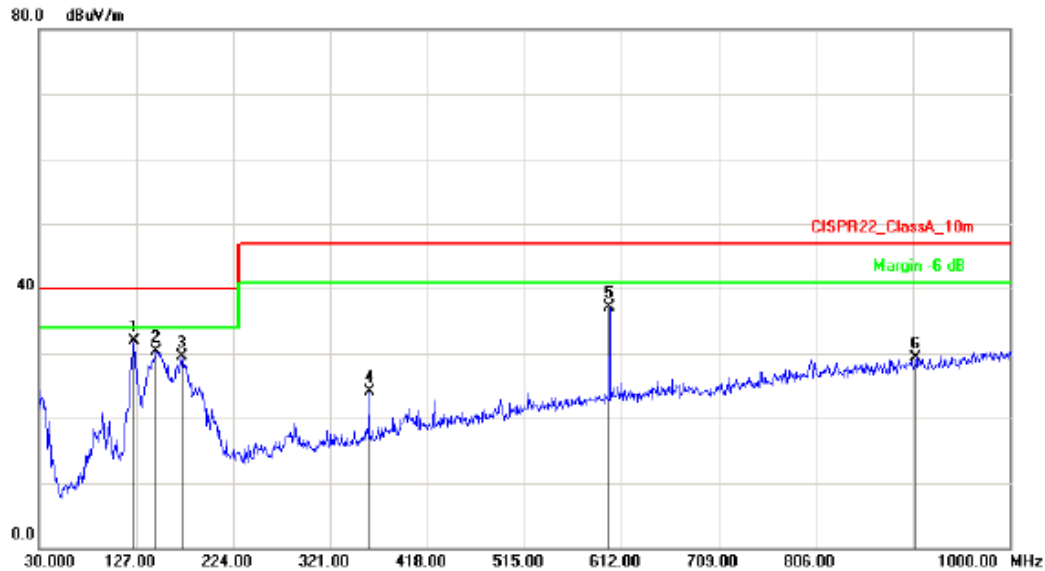


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	125.0600	-9.77	41.66	31.89	40.00	-8.11	QP	400	280
2	147.3700	-10.58	40.93	30.35	40.00	-9.65	QP	400	66
3	172.5900	-11.25	40.76	29.51	40.00	-10.49	QP	400	44
4	359.8000	-6.84	31.04	24.20	47.00	-22.80	QP	100	261
5	600.1400	-1.24	38.40	37.16	47.00	-9.84	QP	100	93
6	906.8799	3.58	25.71	29.29	47.00	-17.71	QP	400	29

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 1: Full system with vision signal of HDMI 1		
AC Power :	AC 120V/60Hz	Ant. Polarization:	Vertical
Equipment :	NETWORK VIDEO DECODER	Model No :	NVD0905DH-4I-4K
Temp :	25°C	Humidity :	53%
Pressure(mbar) :	1002	Date :	2016/10/29

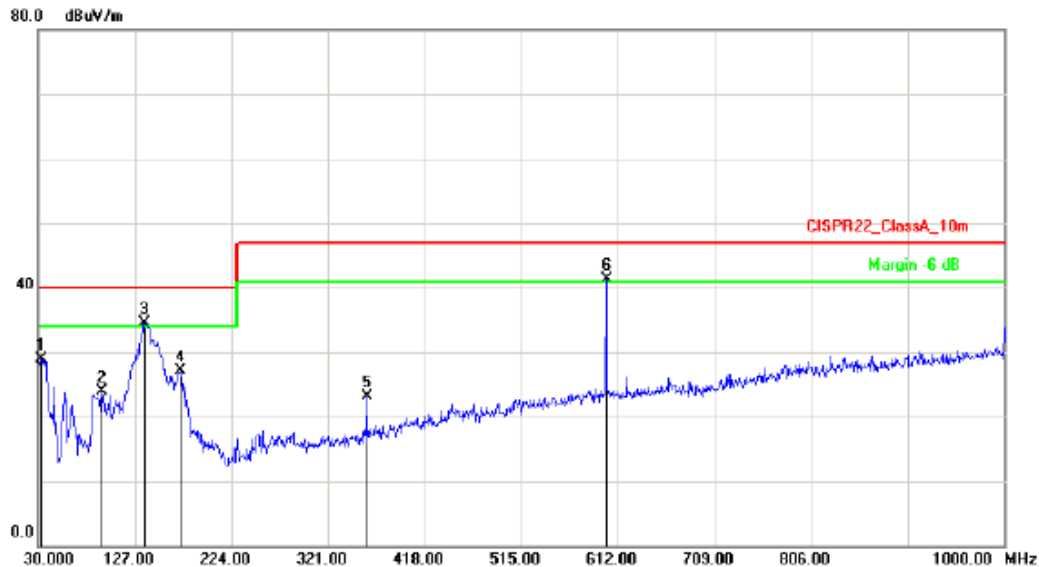


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	32.9099	-5.36	34.20	28.84	40.00	-11.16	QP	400	154
2	94.0199	-15.30	39.25	23.95	40.00	-16.05	QP	100	326
3	136.6999	-10.28	44.82	34.54	40.00	-5.46	QP	100	296
4	172.5900	-11.25	38.26	27.01	40.00	-12.99	QP	400	0
5	359.8000	-6.84	29.86	23.02	47.00	-23.98	QP	100	0
6	600.3600	-1.24	42.61	41.37	47.00	-5.63	QP	100	28

Note: Measurement Level = Reading Level + Correct Factor

Remark: All test results are referred to the original report SEFD1609042 which was issued by Cerpass Technology Corporation.

**5.2.5. Test Results – above 1GHz**

Test Mode :	Mode 1: Full system with vision signal of HDMI 1		
AC Power :	AC 120V/60Hz	Ant. Polarization:	Horizontal
Equipment :	NETWORK VIDEO DECODER	Model No :	NVD0905DH-4I-4K
Temp :	25°C	Humidity :	53%
Pressure(mbar) :	1002	Date :	2016/10/29

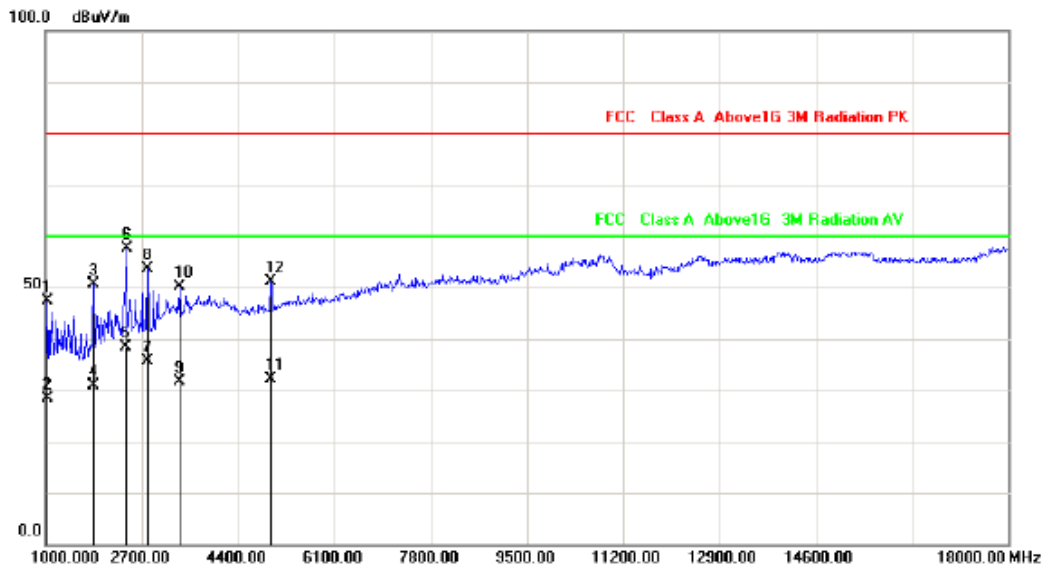


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1034.000	-9.50	56.87	47.37	80.00	-32.63	peak	100	174
2	1035.000	-9.49	37.81	28.32	60.00	-31.68	AVG	100	174
3	1850.000	-4.32	54.87	50.55	80.00	-29.45	peak	100	209
4	1851.000	-4.32	35.19	30.87	60.00	-29.13	AVG	100	209
5	2427.000	-2.10	40.52	38.42	60.00	-21.58	AVG	200	316
6	2428.000	-2.10	59.80	57.70	80.00	-22.30	peak	200	316
7	2800.000	-1.07	36.74	35.67	60.00	-24.33	AVG	100	139
8	2802.000	-1.06	54.79	53.73	80.00	-26.27	peak	100	139
9	3362.000	0.97	30.55	31.52	60.00	-28.48	AVG	100	228
10	3363.000	0.97	49.19	50.16	80.00	-29.84	peak	100	228
11	4976.000	3.62	28.63	32.25	60.00	-27.75	AVG	100	214
12	4978.000	3.63	47.46	51.09	80.00	-28.91	peak	100	214

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 1: Full system with vision signal of HDMI 1		
AC Power :	AC 120V/60Hz	Ant. Polarization:	Vertical
Equipment :	NETWORK VIDEO DECODER	Model No :	NVD0905DH-4I-4K
Temp :	25°C	Humidity :	53%
Pressure(mbar) :	1002	Date :	2016/10/29

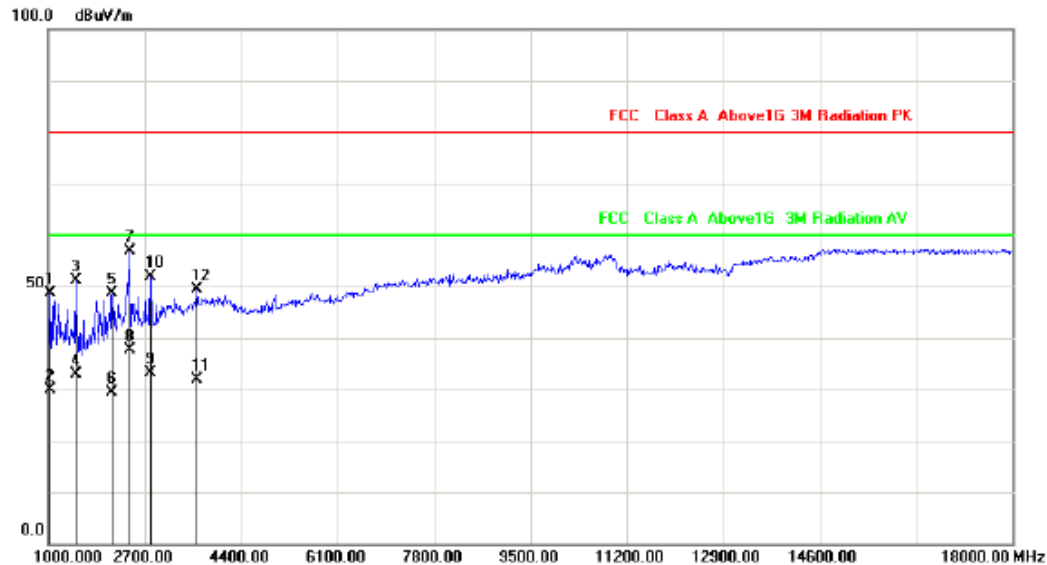


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1034.000	-9.50	58.01	48.51	80.00	-31.49	peak	100	161
2	1035.000	-9.49	39.42	29.93	60.00	-30.07	AVG	100	161
3	1476.000	-5.96	57.00	51.04	80.00	-28.96	peak	100	209
4	1477.000	-5.95	38.94	32.99	60.00	-27.01	AVG	100	209
5	2122.000	-3.24	51.79	48.55	80.00	-31.45	peak	100	238
6	2124.000	-3.24	32.56	29.32	60.00	-30.68	AVG	100	238
7	2428.000	-2.10	58.92	56.82	80.00	-23.18	peak	200	51
8	2429.000	-2.10	39.77	37.67	60.00	-22.33	AVG	200	51
9	2801.000	-1.07	34.15	33.08	60.00	-26.92	AVG	100	156
10	2802.000	-1.06	52.87	51.81	80.00	-28.19	peak	100	156
11	3617.000	2.00	29.78	31.78	60.00	-28.22	AVG	100	225
12	3618.000	2.00	47.40	49.40	80.00	-30.60	peak	100	225

Note: Measurement Level = Reading Level + Correct Factor



Remark: All test results are referred to the original report SEFD1609042 which was issued by Cerpass Technology Corporation.

Appendix I: Photographs of Test Configuration



Conducted Disturbance

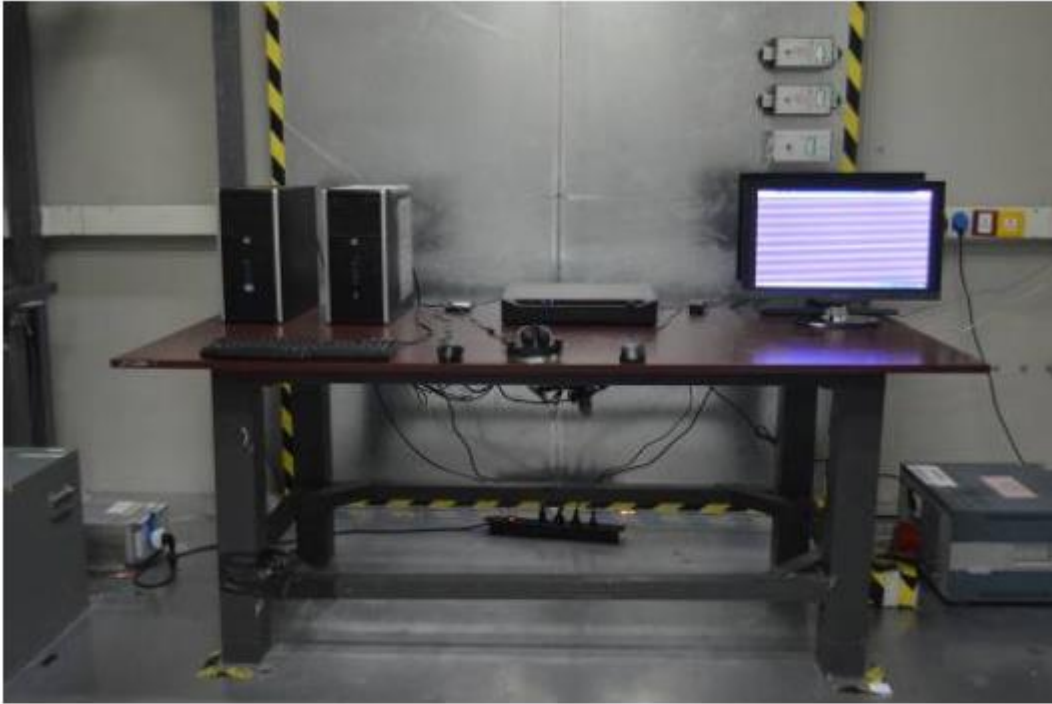

Radiated Disturbance below 1GHz

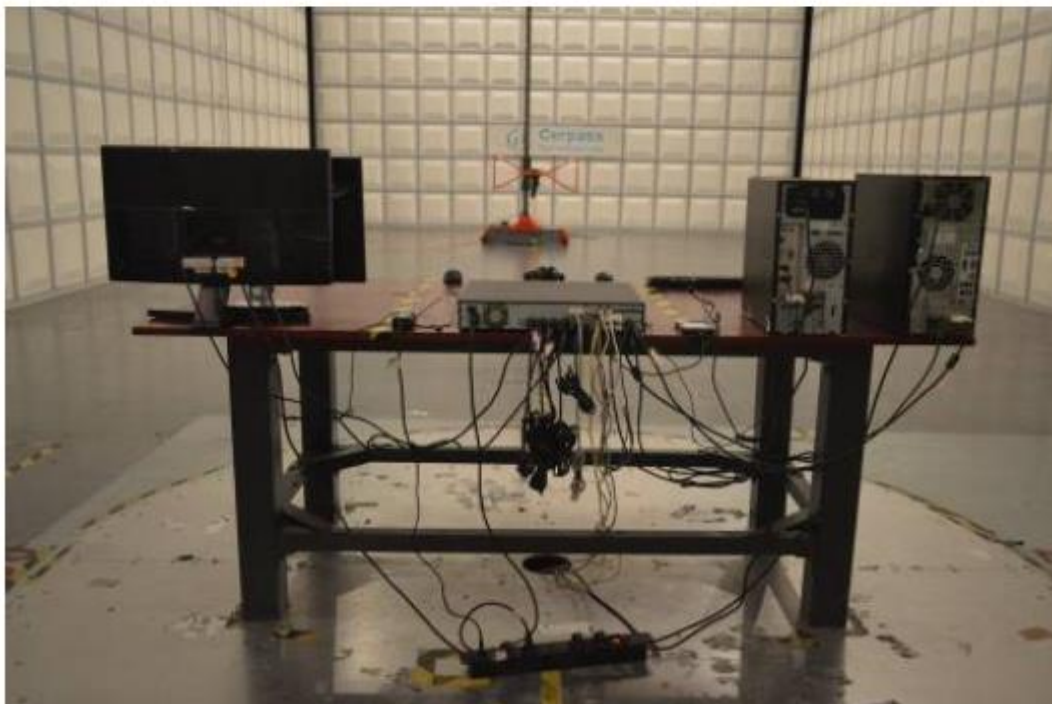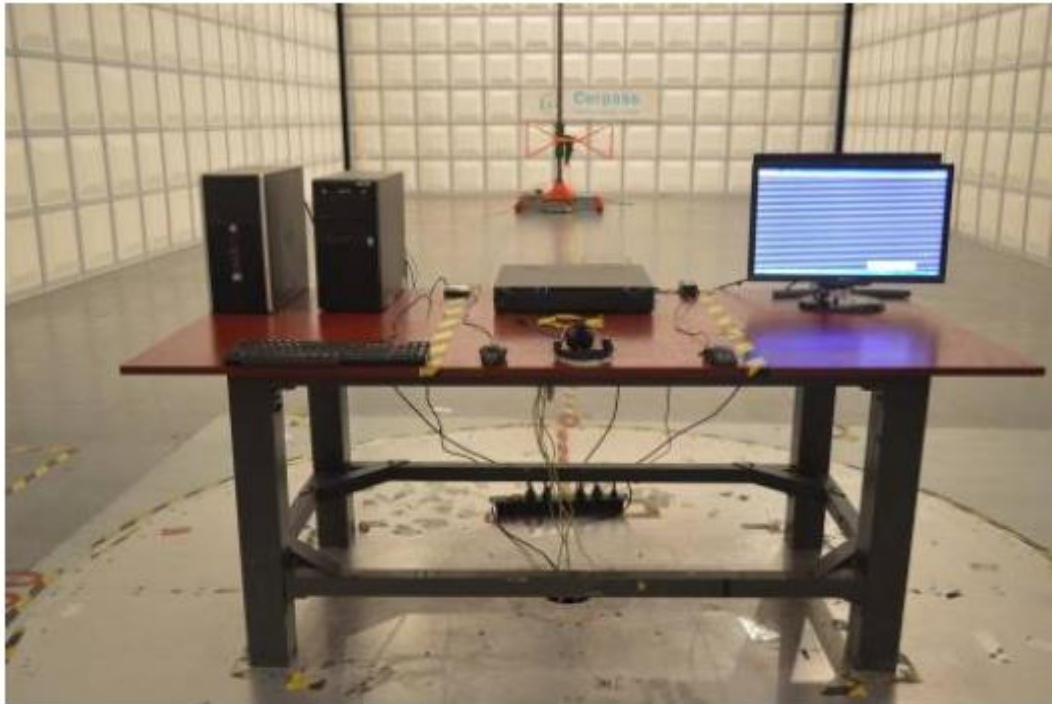

Radiated Disturbance above 1GHz

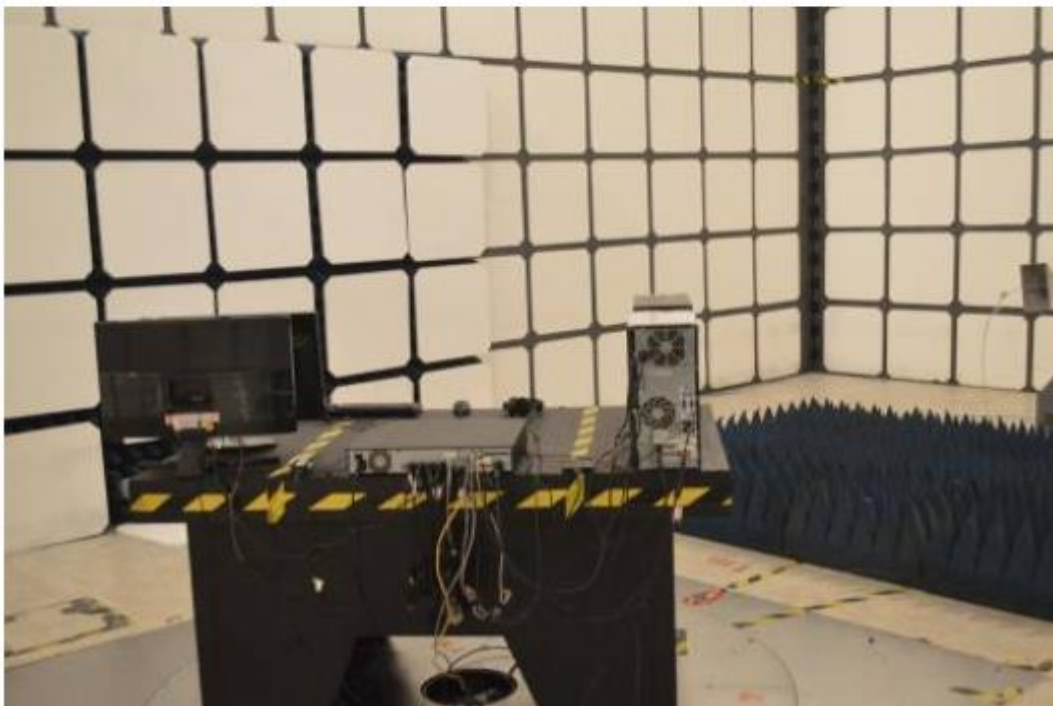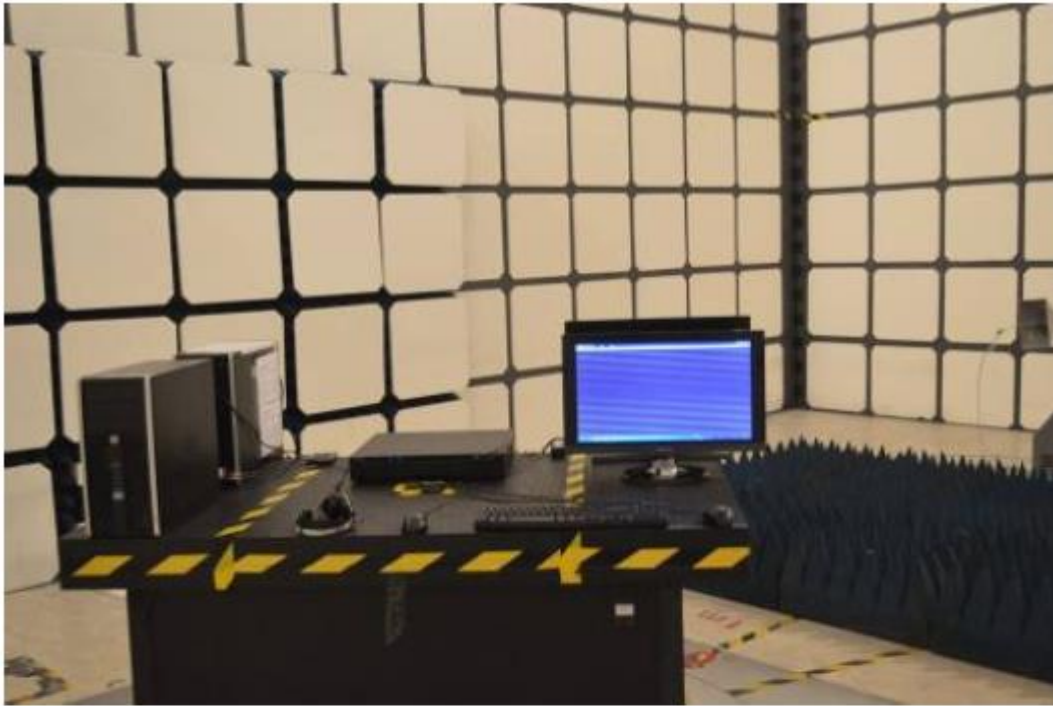


Appendix II: Photographs of the EUT

1) EUT Photo



2) EUT Photo

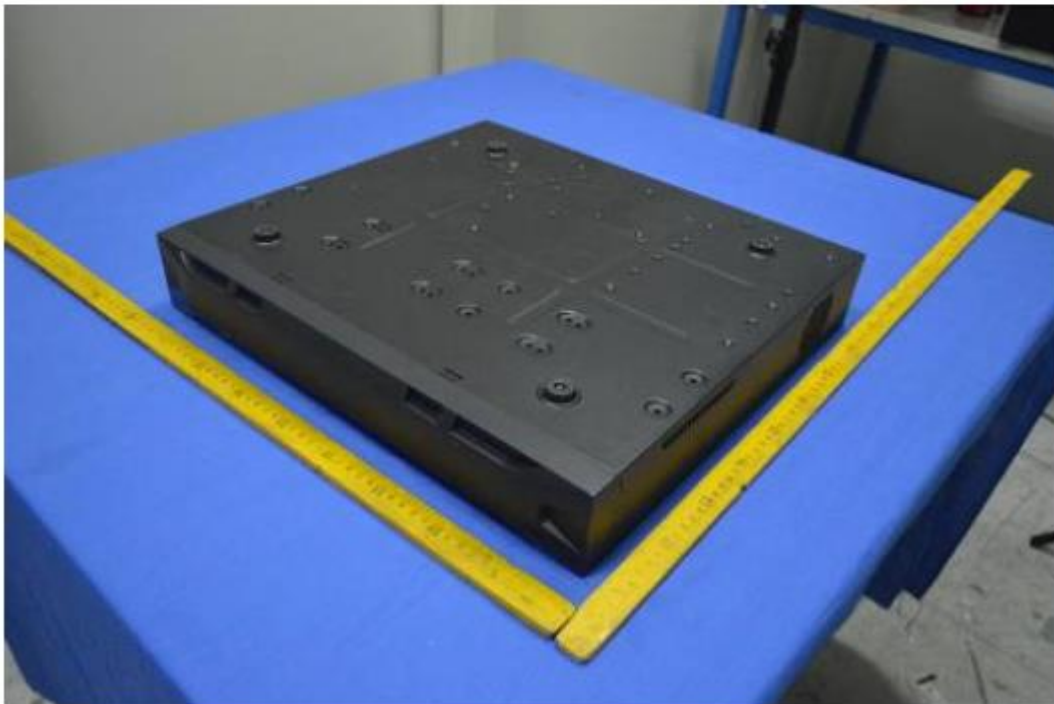

3) EUT Photo



4) EUT Photo



END OF REPORT