

MD49V1000002224629105MDL

Bucket Capacity	Volumul causului	4,0 m3
Rated Payload	Capacitate	6000 kg
Operating Weight	Greutate proprie	21150 kg
Dimensions (L×W×H)	Dimensiunile (L x L x l)	8610 x 3050 x 3430 mm
Wheel Base	Ampatament	3400 mm
Ground Clearance	Garda la sol minima	432 mm
Dump Clearance at Max. Lift (45°)	Inaltimea maxima de descarcare pe margina causului	3411 mm
Bucket Pin Height at Max. Lift	Inaltime de descarcare in punctul junctiunii causului	4550 mm
Dump Angle at Max. Lift	Unghi de incarcare	45 °
Steering Angle – Left/Right	Unghi de intoarcere a rotilor	35 °
Min. Turning Radius over Bucket	Raza de intoarcere pe marginea causului	7650 mm
Min. Turning Radius over Tires	Raza minima de intoarcere	6798 mm
Traction Force	Forta maxima de tractiune	175 kN
Breakout Force	Forta maxima de ridicare	200 kN
Engine – Diesel	Motor - Diesel	WEICHAİ WD10G240E21
Rated Power	Puterea nominala a motorului	175 kw / 2200 rpm
No. of Cylinders / Displacement	Nr. cilindre / Capacitate cilindrica	6 / 9726 ml
Maximum Torque	Cuplu nominal	920 N.m / 1300 – 1600 rpm
Steering system	Sistem de directie	Hydraulic Load Sensing System
Transmission	Transmisie	ZF
Travel Speed-Forward	Viteze inainte	6,7 / 11,7 / 23,8 / 37,5 km/h
Travel Speed-Reverse	Viteze inapoi	6,7 / 11,7 / 23,8 km/h
Control	Sistem de comanda	Joystic
Cycle Time	Ciclu de lucru	11,8 s
Hydraulic System Pressure	Presiune sistemului hidraulic	16 MPa
Pump	Flux hidraulic	275 l/min * 2200 rpm
Fuel Tank	Rezervor de combustibil	285 l
Hydraulic Tank	Rezervor ulei hidraulic	270 l
Features	Dotari	Cabin FOPS&ROPS
Features	Dotari	Air Conditioner
Features	Dotari	Cold starting -35°C

FORKLIFT



комплексные складские решения

SRL "MICROCELL"



c/f 1003600007407

TVA 0304213

VICBMD2X490

BC "VictoriaBank" S.A.

MD49VI000002224629105MDL

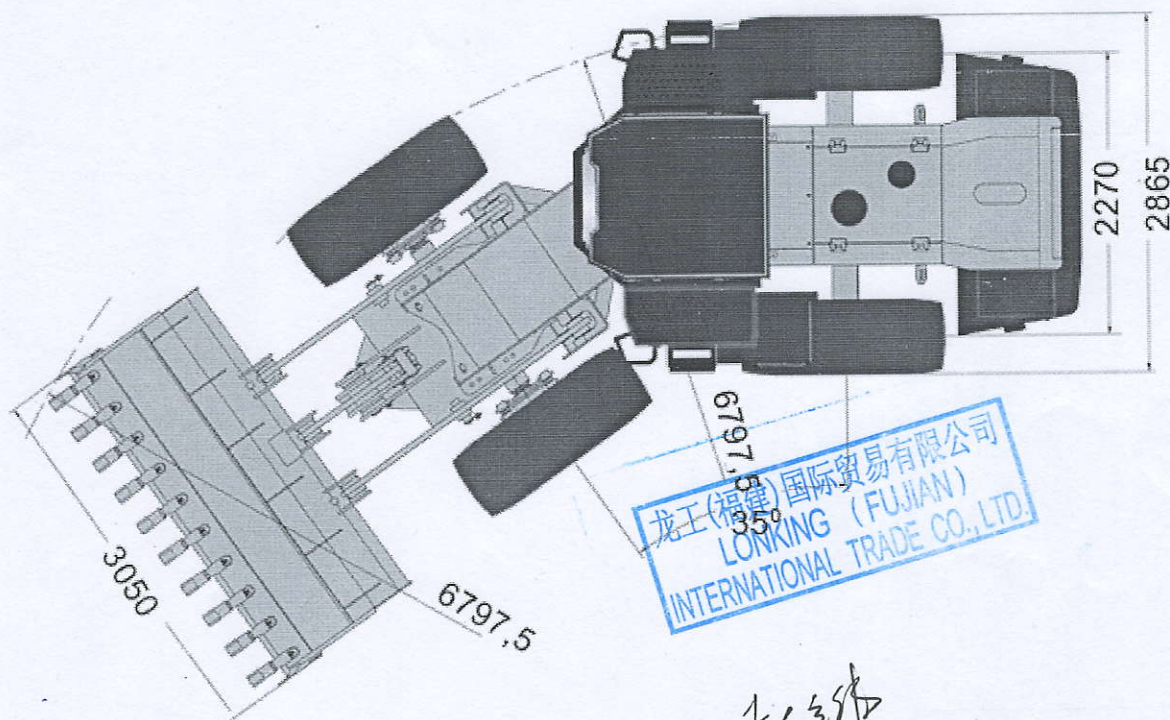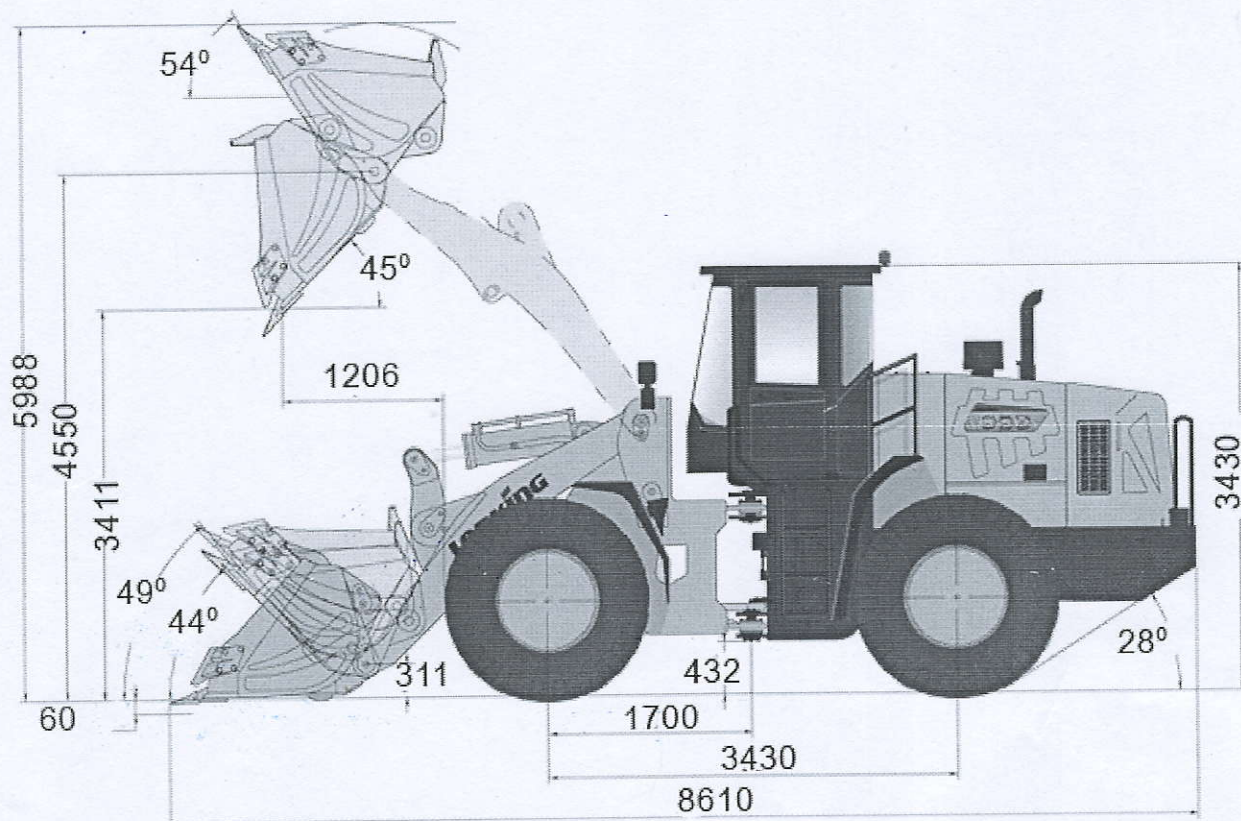

6797.5
35°
龙王(福建)国际贸易有限公司
LONKING (FUJIAN)
INTERNATIONAL TRADE CO., LTD.

8.6