


BT-720 VITAL SIGN MONITOR

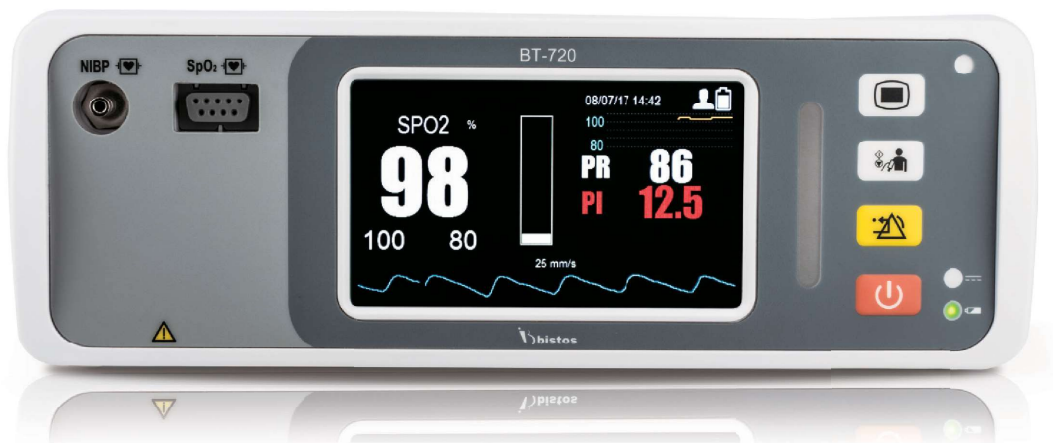


4.3" Vital Sign Monitor

SpO₂, Pulse, NIBP, Masimo SpO₂


Touch screen / Portable design / PC view software



Portable design




SpO₂



SpO₂+NIBP

:: Technical Specification


Model		BT-720	
Category		Vital Sign Monitor	
Display		4.3" Touch LCD	
SpO ₂	Measurement Range	0-100 %	
	Accuracy (70-100%)	Adult / Pediatric	±2 %
		Neonate	±3 %
	Accuracy (0-69%)	Unspecified	
	Perfusion Index	0.05-20 %	
	Pulse Rate Range (bpm)	25-250	
NIBP**	Method	Automatic Oscillometric	
	Operation Mode	Manual / Auto / STAT	
	Parameter	Systolic, Diastolic, Mean	
	Systolic Range (mmHg)	Adult	40-270
		Pediatric	40-200
		Neonate	40-130
	Diastolic Range (mmHg)	Adult	10-210
		Pediatric	10-160
		Neonate	10-90
	Mean Range (mmHg)	Adult	20-230
Pediatric		20-175	
Neonate		20-100	
SpO ₂ -Masimo*		Masimo SpO ₂	
Battery	Type (capacity)	Li-ino (4400 mAh)	
	Run Time	8 hour	
	Charging Time	8 hour	
PC Software Interface		RJ45, SD card slot	
Warranty		2 year	

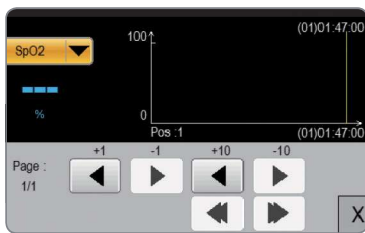

Trend Graphic

Time	SpO2	PR	ET	FI	awRR
1-01-2016 00:00	---	---	---	---	---
1-01-2016 00:01	---	---	---	---	---
1-01-2016 00:00	---	---	---	---	---
1-01-2016 00:01	---	---	---	---	---
1-01-2016 00:02	---	---	---	---	---
1-01-2016 00:01	---	---	---	---	---
1-01-2016 00:00	---	---	---	---	---
1-01-2016 00:01	---	---	---	---	---
1-01-2016 00:00	---	---	---	---	---
1-01-2016 00:05	---	---	---	---	---
1-01-2016 00:04	---	---	---	---	---

Trend Tabular

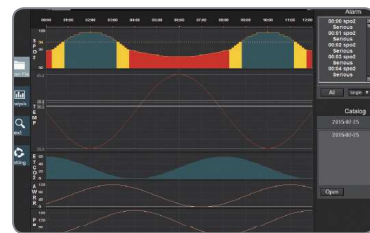

PC Viewer Software