

Lumen Maintenance Package for LUXEON 5050

(published: Oct 30, 2023)

Section 1 - Model Description, Models Covered,
Energy Star LM-80 Cover Sheet and TM-21-11
Results

Section 2 - LM-80 Test Reports

This report issued to LUG Light Factory sp. z o.o.

Section 1

1.1 Models Description

LUXEON 5050 Square LES with model number L150-4070503000050 (nominal CCT 4000K, 30V) was used in this LM-80 testing. Figure 1 shows the overall mechanical dimension of this product in mm.

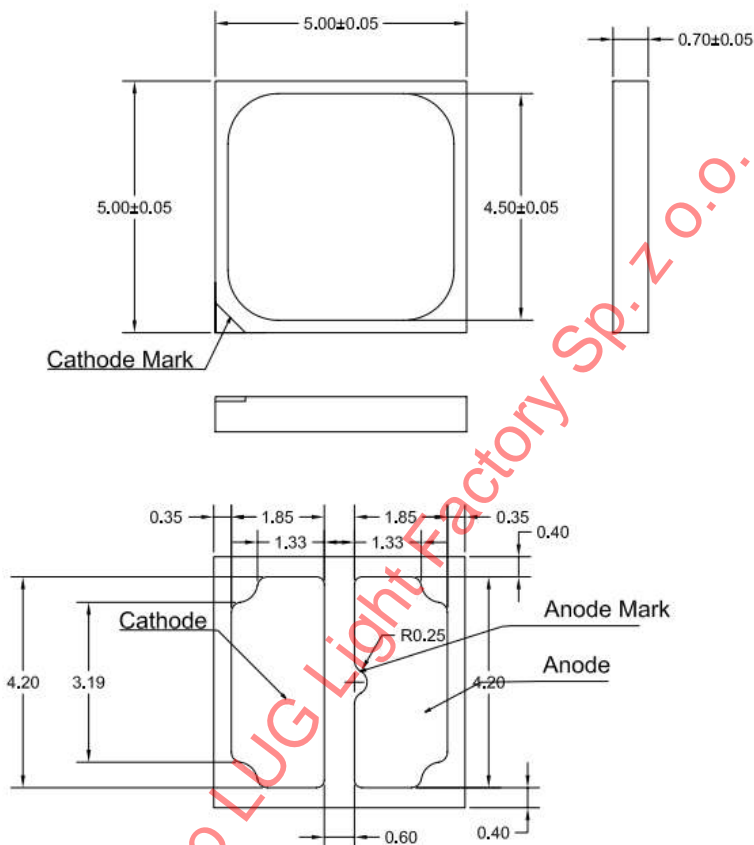


Figure 1. Mechanical drawing for LUXEON 5050 Square LES

This report issued to LUG Light Factory Sp. z o.o.

1.2 Additional Models Covered

The LM-80 test result here can be applied to the following part numbers:

Product Family	Part Number	Color
LUXEON 5050 (Square LES)	L150-AABB50CC000S0 (DUT)	White
LUXEON 5050 (Round LES)	L150-AABB50CC00000	White

For LUXEON 5050 (Square LES): AA designates nominal ANSI CCT (40=4000K, 50=5000K, 57=5700K, 65=6500K), BB designates minimum CRI (70=70CRI, 80=80CRI, 90=90CRI), CC designates voltage (06=6V, 30=30V).

For LUXEON 5050 (Round LES): AA designates nominal ANSI CCT (40=4000K, 50=5000K, 57=5700K, 65=6500K), BB designates minimum CRI (70=70CRI, 80=80CRI, 90=90CRI), CC designates voltage (06=6V, 24=24V).

Please note LUXEON 5050 (Square LES) 6V parts have an equivalent drive current I_f' that can be determined as follows: $I_f' = I_f * 5$.

Please note LUXEON 5050 (Round LES) 6V parts have an equivalent drive current I_f' that can be determined as follows: $I_f' = I_f * 4$.

This report issued to LUG Light Factory Sp. z o.o.

1.3 ENERGY STAR® Cover Sheet

ENERGY STAR® LM-80 Cover Sheet

Administrative Information

Tested subcomponent series: LUXEON 5050 Square

Tested subcomponent model number: L150-40705030000S0
(4000K)

Report issue date: Oct 30, 2023 (see Section 2 for details)

Report revision date (if applicable): n/a

Testing start date: Apr 19, 2019

Testing completion date: Feb 27, 2022

DUT sampling method: 36 samples per test condition (see Section 2 for details)

DUT Identification

DUT manufacturer's name: Lumileds LLC

DUT identification, e.g., model number: L150-40705030000S0

Description of DUT, including if the DUT is an LED package or module: LED package

DUT Characteristics

Total input power (W): 4.55 W initial average power at max maintenance current

Average current density per LED die (mA/mm²): 300 mA/mm² at max current

Average power density per LED die (W/mm²): 9.07 W/mm² at max current

Representative CRI (R_a) of the tested sample set: 70 minimum

(Indicate whether the reported value is the mean or median value of the sample set, or per unit)

Minimum die edge to die edge spacing: 0.4 mm

1.4 TM-21-11 Data

Lumen maintenance L_{70} lifetimes are calculated according to IESNA TM-21-11 method with 17,000 hrs of maintenance data with sample size of 36 per test condition.

Test Conditions	alpha	B	Reported L_{70} (hrs)
70mA 55°C	1.9887E-07	1.0124	102,000
70mA 85°C	4.2484E-07	1.0072	102,000
70mA 105°C	5.2323E-09	0.9921	102,000

Additional Projection per TM-21-11:

Projected L_{70}

If = 70mA	
Ts = 55°C	1,855,724
Ts = 85°C	856,403
Ts = 105°C	66,644,632

Projected L_{80}

If = 70mA	
Ts = 55°C	1,184,263
Ts = 85°C	542,094
Ts = 105°C	41,124,019

Projected L_{90}

If = 70mA	
Ts = 55°C	591,992
Ts = 85°C	264,854
Ts = 105°C	18,613,243

This report issued to LUG Light Factory Sp. z o.o.

Section 2 LM-80 Test Report

Report Reference No.	Current	Ts Temperature
LUMI012-B1-180	70mA	55°C
	70mA	85°C
	70mA	105°C

This report issued to LUG Light Factory Sp. z o.o.

About Lumileds

Companies developing automotive, mobile, IoT and illumination lighting applications need a partner who can collaborate with them to push the boundaries of light. With over 100 years of inventions and industry firsts, Lumileds is a global lighting solutions company that helps customers around the world deliver differentiated solutions to gain and maintain a competitive edge. As the inventor of Xenon technology, a pioneer in halogen lighting and the leader in high performance LEDs, Lumileds builds innovation, quality and reliability into its technology, products and every customer engagement. Together with its customers, Lumileds is making the world better, safer, more beautiful—with light.

To learn more about our lighting solutions, visit lumileds.com.

This report issued to LUG Light Factory Sp. z o.o.



©2023 Lumileds Holding B.V. All rights reserved
LUXEON is a registered trademark of the Lumileds Holding B.V. in the United States and other countries.

lumileds.com

Neither Lumileds Holding B.V. nor its affiliates shall be liable for any kind of loss of data or any other damages, direct, indirect or consequential, resulting from the use of the provided information and data. Although Lumileds Holding B.V. and/or its affiliates have attempted to provide the most accurate information and data, the materials and services information and data are provided "as is," and neither Lumileds Holding B.V. nor its affiliates warrants or guarantees the contents and correctness of the provided information and data. Lumileds Holding B.V. and its affiliates reserve the right to make changes without notice. You as user agree to this disclaimer and user agreement with the download or use of the provided materials, information and data. A listing of Lumileds product/patent coverage may be accessed at lumileds.com/patents.



LM-80 17000 Hour Interval Test Report

IES LM-80-15 Approved Method for Measuring Lumen Maintenance of LED Light Sources

CSA Group Report: LUMI012-B1-180

May 19, 2021

Manufacturer:	LUMILEDS
Models tested:	L150-40705030000S0 LUXEON 5050
Test conditions:	36 devices @ 55.0 C, 0.070 A 36 devices @ 85.0 C, 0.070 A 36 devices @ 105.0 C, 0.070 A

Prepared for:
Lumileds Lighting Company, LLC
370 W. Trimble Road
San Jose, CA 95131

Attn:

Test report prepared by:

Gabriel Trippel

Project Engineer,
Test and Measurement Services

Testing performed by:
CSA Group Seattle
14833 NE 87th St
Redmond, WA 98052
425-605-8500
www.csagroupseattle.org

Test report approved by:

KC Fletcher

Project Manager,
Test and Measurement Services

1.0 Statement of test conditions, summary of results, and reporting requirements:

Part number: L150-40705030000S0					
Life test conditions				Summary of results	
Test condition	Drive current (A)	Case temperature (°C)	Elapsed life test time (hrs)	Average lumen maintenance (%)	Average chromaticity shift ($\Delta u'v'$)
TC1	0.070	55	17000	100.8	0.0007
TC2	0.070	85	17000	100.0	0.0017
TC3	0.070	105	17000	99.2	0.0027
LM-80-15 Reporting requirements					
1. Number of samples tested:			36 per test condition		
2. Description of LED light sources			LED Package ¹		
3. Description of auxiliary equipment			see section 6.1 below		
4. Operating cycle			LED packages are driven at constant current for life test and are pulsed for photometric test.		
5. Ambient conditions, airflow, relative humidity			LED's are operated on controlled thermal plates in an environment that complies with the requirements given in Section 4.4 of LM-80-15. Case temperature (Ts): controlled to within -2°C, Surrounding air temp: controlled to within -5°C of Ts, Humidity: < 65 RH, No forced air flow		
6. Case temperature (test point temperature)			See summary table above for test conditions. The temperature measurement point is shown in Sec. 6.3.		
7. Drive current during life test			see summary table above		
8. Initial luminous flux and forward voltage			see data tables for individual test conditions		
9. Lumen maintenance data for each individual LED light source			see data tables for individual test conditions		
10. Observation of LED light source failures			see data tables for individual test conditions		
11. LED light source monitoring intervals			see data tables for individual test conditions		
12. Photometric measurement uncertainty			k=2 expanded measurement uncertainty for relative luminous flux measurements is $\pm 2.0\%$		
13. Chromaticity shift reported over the measurement time			see data tables for individual test conditions		
14. Test start date			July 15, 2019		
15. ANSI target and calculated CCT values			see data tables		

Notes:

- per ANSI/IESNA RP-16-05 Addendum b, *Nomenclature and Definitions for Illuminating Engineering*

TABLE 1.1 - Initial ANSI Target & Calculated CCT Results L150-40705030000S0

Load board ID	Device number	Zero hour measurements		Load board ID	Device number	Zero hour measurements		Load board ID	Device number	Zero hour measurements	
		ANSI Target* CCT (K)	Initial Calculated CCT (K)			ANSI Target* CCT (K)	Initial Calculated CCT (K)			ANSI Target* CCT (K)	Initial Calculated CCT (K)
24000010766031C	D1	3985±275	3958	710000108415031C	D1	3985±275	3927	020000107325031C	D1	3985±275	3962
	D2	3985±275	3936		D2	3985±275	3963		D2	3985±275	3969
	D3	3985±275	3969		D3	3985±275	3961		D3	3985±275	3973
	D4	3985±275	3969		D4	3985±275	3947		D4	3985±275	3957
	D5	3985±275	3953		D5	3985±275	3934		D5	3985±275	3969
	D6	3985±275	3949		D6	3985±275	3970		D6	3985±275	3959
	D7	3985±275	3954		D7	3985±275	3956		D7	3985±275	3951
	D8	3985±275	3966		D8	3985±275	3963		D8	3985±275	3929
	D9	3985±275	3950		D9	3985±275	3928		D9	3985±275	3943
	D10	3985±275	3949		D10	3985±275	3970		D10	3985±275	3992
	D11	3985±275	3955		D11	3985±275	3946		D11	3985±275	3931
	D12	3985±275	3959		D12	3985±275	3950		D12	3985±275	3945
2A0000107ECA031C	D1	3985±275	3953	E000001078AF031C	D1	3985±275	3971	C400001082AC031C	D1	3985±275	3949
	D2	3985±275	3965		D2	3985±275	3959		D2	3985±275	3953
	D3	3985±275	3954		D3	3985±275	3960		D3	3985±275	3941
	D4	3985±275	3953		D4	3985±275	3944		D4	3985±275	3958
	D5	3985±275	3962		D5	3985±275	3936		D5	3985±275	3957
	D6	3985±275	3959		D6	3985±275	3977		D6	3985±275	3947
	D7	3985±275	3959		D7	3985±275	3975		D7	3985±275	3952
	D8	3985±275	3963		D8	3985±275	3961		D8	3985±275	3981
	D9	3985±275	3938		D9	3985±275	3948		D9	3985±275	3944
	D10	3985±275	3948		D10	3985±275	3952		D10	3985±275	3957
	D11	3985±275	3942		D11	3985±275	3932		D11	3985±275	3958
	D12	3985±275	3976		D12	3985±275	3962		D12	3985±275	3979

* target CCT as defined in ANSI C78.377-2008

This report issued to Lumileds Factory Sp. z o.o.

Test Condition 1 55 °C 0.070 A														
TABLE 2.0 - LUMEN MAINTENANCE RESULTS													L150-40705030000S0	
Test Condition 1 55 °C 0.070 A														
Load board ID	Device number	Zero hour measurements		Photometric test drive current: 0.070 A Photometric test ambient temperature: 25 ± 2 °C Failures observed: none										
		Flux (lm)	Vf (V)	Lumen Maintenance (%)										
				1000	2000	3000	4000	5000	6000	7000	8000	9000	10000	11000
24000010766031C	D1	373.53	28.13	101.1	101.2	101.3	101.4	101.3	101.4	101.4	101.5	101.5	101.4	101.4
	D2	375.40	28.24	100.9	101.0	101.0	101.1	101.0	101.1	101.1	101.1	101.2	101.2	101.2
	D3	372.60	28.16	100.9	100.9	101.0	101.1	101.0	101.1	101.1	101.1	101.2	101.1	101.1
	D4	373.75	28.24	100.8	100.8	100.9	101.0	100.9	100.9	100.9	101.0	101.0	101.0	101.0
	D5	375.25	28.15	100.7	100.7	100.8	100.9	100.9	100.9	100.9	100.9	100.9	101.0	101.0
	D6	372.07	28.20	100.8	100.8	100.9	101.0	100.9	100.9	101.0	101.0	101.1	101.1	101.1
	D7	373.63	28.14	100.7	100.7	100.8	100.9	100.8	100.8	100.8	100.9	100.9	100.9	100.9
	D8	375.16	28.17	100.7	100.7	100.8	100.9	100.9	100.9	100.9	100.9	101.0	100.9	100.9
	D9	373.28	28.18	100.7	100.8	100.9	101.0	100.9	100.9	101.0	101.0	101.1	101.1	101.1
	D10	375.56	28.18	100.5	100.6	100.6	100.7	100.7	100.7	100.7	100.8	100.8	100.8	100.8
	D11	374.85	28.17	100.6	100.6	100.6	100.8	100.7	100.7	100.7	100.8	100.8	100.8	100.8
	D12	375.93	28.18	100.6	100.6	100.7	100.7	100.7	100.6	100.6	100.7	100.7	100.7	100.7
2A0000107ECA031C	D1	375.38	28.16	100.8	100.8	100.9	101.1	100.9	101.0	100.9	101.1	101.0	101.1	101.1
	D2	374.74	28.16	100.9	101.0	101.0	101.2	101.1	101.1	101.1	101.2	101.2	101.2	101.2
	D3	371.34	28.27	100.9	100.9	101.0	101.1	100.9	100.9	100.9	101.0	101.0	101.1	101.1
	D4	373.48	28.19	100.7	100.8	100.9	101.0	100.9	100.8	100.8	100.9	100.9	100.9	100.9
	D5	373.92	28.18	100.8	100.7	100.9	101.1	100.9	101.0	101.0	101.0	101.0	101.1	101.1
	D6	374.34	28.25	100.8	100.8	100.9	101.1	100.9	101.0	101.0	101.1	101.1	101.1	101.1
	D7	373.71	28.18	100.8	100.9	100.9	101.1	101.0	101.0	101.0	101.1	101.1	101.1	101.1
	D8	371.30	28.22	100.7	100.8	100.9	101.1	101.0	101.0	101.0	101.1	101.1	101.0	101.1
	D9	372.06	28.20	100.7	100.7	100.8	101.0	100.9	100.9	100.9	101.0	101.0	101.1	101.0
	D10	377.80	28.20	100.7	100.7	100.8	101.0	100.8	100.8	100.8	100.9	100.9	101.0	101.0
	D11	374.08	28.18	100.7	100.8	100.8	101.0	100.9	100.9	100.9	101.0	101.0	101.1	101.0
	D12	374.55	28.27	100.6	100.7	100.8	101.0	100.8	100.9	100.8	100.9	101.0	101.0	100.9

This report is the property of Lumileds Lighting, Inc. All rights reserved.

Test Condition 1 55 °C 0.070 A

TABLE 2.0 - LUMEN MAINTENANCE RESULTS **L150-40705030000S0**

Test Condition 1 55 °C 0.070 A

Load board ID	Device number	Zero hour measurements		Photometric test drive current: 0.070 A Photometric test ambient temperature: 25 ± 2 °C Failures observed: none																
		Flux (lm)	Vf (V)	Lumen Maintenance (%)																
				12000	13000	14000	15000	16000	17000											
240000107666031C	D1	373.53	28.13	101.4	101.3	101.4	101.3	101.2	101.1											
	D2	375.40	28.24	101.1	101.1	101.2	101.2	101.1	101.0											
	D3	372.60	28.16	101.1	101.0	101.1	101.1	101.0	100.9											
	D4	373.75	28.24	100.9	100.9	101.0	100.9	100.9	100.8											
	D5	375.25	28.15	100.9	100.9	101.1	101.0	101.0	100.8											
	D6	372.07	28.20	101.1	101.0	101.2	101.1	101.1	101.0											
	D7	373.63	28.14	100.9	100.8	100.9	100.8	100.8	100.7											
	D8	375.16	28.17	100.9	100.9	101.0	100.9	100.9	100.8											
	D9	373.28	28.18	101.0	101.0	101.1	101.1	101.0	101.0											
	D10	375.56	28.18	100.8	100.7	100.9	100.8	100.7	100.7											
	D11	374.85	28.17	100.7	100.7	100.8	100.8	100.7	100.6											
	D12	375.93	28.18	100.7	100.6	100.7	100.7	100.6	100.6											
2A0000107ECA031C	D1	375.38	28.16	101.1	101.0	101.1	101.1	101.0	100.9											
	D2	374.74	28.16	101.2	101.1	101.2	101.2	101.1	101.0											
	D3	371.34	28.27	101.0	101.0	101.1	101.0	101.0	100.9											
	D4	373.48	28.19	100.9	100.9	100.9	100.9	100.9	100.7											
	D5	373.92	28.18	101.1	101.0	101.1	101.1	101.0	100.9											
	D6	374.34	28.25	101.1	101.1	101.1	101.1	101.1	101.0											
	D7	373.71	28.18	101.1	101.1	101.2	101.1	101.1	100.9											
	D8	371.30	28.22	101.1	101.1	101.1	101.1	101.1	101.0											
	D9	372.06	28.20	101.0	101.0	101.1	101.0	100.8	100.9											
	D10	377.80	28.20	100.9	100.9	100.9	100.9	100.8	100.7											
	D11	374.08	28.18	101.0	100.9	101.0	100.9	100.9	100.8											
	D12	374.55	28.27	100.9	100.9	101.0	100.9	100.9	100.8											

This report is supplied by Lumileds Factory Sp. z o.o.

Test Condition 1 55 °C 0.070 A

TABLE 2.1 - PHOTOSYNTHETIC PHOTON FLUX MAINTENANCE RESULTS **L150-40705030000S0**

Test Condition 1 55 °C 0.070 A

Load board ID	Device number	Zero hour measurements		Photometric test drive current: 0.070 A Photometric test ambient temperature: 25 ± 2 °C Failures observed: none										
		PPF (µmol/s)	VF (V)	Photosynthetic Photon Flux Maintenance (%)										
				1000	2000	3000	4000	5000	6000	7000	8000	9000	10000	11000
24000010766031C	D1	4.90	28.13	101.0	101.0	101.1	101.3	101.2	101.2	101.3	101.3	101.3	101.3	101.3
	D2	4.91	28.24	100.8	100.8	100.8	101.0	100.9	101.0	101.0	101.0	101.1	101.1	101.1
	D3	4.90	28.16	100.7	100.8	100.8	101.0	100.9	101.0	101.0	101.0	101.1	101.1	101.0
	D4	4.90	28.24	100.7	100.7	100.7	100.9	100.8	100.9	100.9	100.9	101.0	100.9	100.9
	D5	4.92	28.15	100.6	100.6	100.7	100.8	100.8	100.8	100.8	100.8	100.9	100.9	100.9
	D6	4.88	28.20	100.7	100.7	100.8	100.9	100.8	100.9	100.9	100.9	101.0	101.0	101.0
	D7	4.90	28.14	100.6	100.6	100.7	100.8	100.7	100.7	100.8	100.8	100.8	100.8	100.8
	D8	4.91	28.17	100.6	100.6	100.7	100.8	100.8	100.8	100.8	100.8	100.9	100.9	100.9
	D9	4.89	28.18	100.6	100.7	100.7	100.9	100.8	100.8	100.9	100.9	101.0	101.0	101.0
	D10	4.92	28.18	100.4	100.4	100.5	100.7	100.6	100.6	100.7	100.7	100.7	100.7	100.7
	D11	4.92	28.17	100.5	100.5	100.5	100.7	100.6	100.6	100.6	100.7	100.7	100.7	100.7
	D12	4.92	28.18	100.5	100.5	100.6	100.6	100.6	100.6	100.6	100.6	100.6	100.7	100.7
2A0000107ECA031C	D1	4.91	28.16	100.6	100.7	100.7	101.0	100.8	100.9	100.9	101.0	101.0	101.0	101.0
	D2	4.90	28.16	100.8	100.9	100.9	101.1	101.0	101.0	101.0	101.1	101.1	101.1	101.1
	D3	4.87	28.27	100.7	100.7	100.8	101.0	100.8	100.8	100.8	101.0	100.9	101.0	101.0
	D4	4.89	28.19	100.6	100.6	100.7	100.9	100.7	100.7	100.7	100.8	100.8	100.8	100.8
	D5	4.90	28.18	100.6	100.6	100.7	101.0	100.8	100.9	100.9	101.0	101.0	101.0	101.0
	D6	4.89	28.25	100.7	100.7	100.8	101.0	100.8	100.9	100.9	101.0	101.0	101.0	101.0
	D7	4.90	28.18	100.7	100.7	100.8	101.0	100.9	100.9	100.9	101.0	101.0	101.0	101.1
	D8	4.86	28.22	100.6	100.7	100.7	101.0	100.9	100.9	100.9	101.0	101.0	100.9	101.0
	D9	4.87	28.20	100.6	100.6	100.7	100.9	100.8	100.8	100.8	100.9	100.9	101.0	100.9
	D10	4.95	28.20	100.6	100.6	100.6	100.9	100.7	100.7	100.7	100.8	100.8	100.9	100.9
	D11	4.91	28.18	100.6	100.6	100.7	100.9	100.8	100.8	100.8	100.9	100.9	101.0	100.9
	D12	4.92	28.27	100.5	100.6	100.7	100.9	100.7	100.8	100.7	100.8	100.9	100.9	100.9

This report is the property of Lumileds. All rights reserved.

Test Condition 1 55 °C 0.070 A

TABLE 2.1 - PHOTOSYNTHETIC PHOTON FLUX MAINTENANCE RESULTS **L150-40705030000S0**

Test Condition 1 55 °C 0.070 A

Load board ID	Device number	Zero hour measurements		Photometric test drive current: 0.070 A Photometric test ambient temperature: 25 ± 2 °C Failures observed: none																
		PPF (µmol/s)	VF (V)	Photosynthetic Photon Flux Maintenance (%)																
				12000	13000	14000	15000	16000	17000											
24000010766031C	D1	4.90	28.13	101.2	101.2	101.3	101.2	101.1	101.0											
	D2	4.91	28.24	101.1	101.0	101.1	101.1	101.0	100.9											
	D3	4.90	28.16	101.0	101.0	101.1	101.0	101.0	100.8											
	D4	4.90	28.24	100.9	100.8	100.9	100.8	100.8	100.7											
	D5	4.92	28.15	100.9	100.9	101.0	100.9	100.9	100.8											
	D6	4.88	28.20	101.0	101.0	101.1	101.0	101.0	100.9											
	D7	4.90	28.14	100.8	100.8	100.8	100.7	100.8	100.6											
	D8	4.91	28.17	100.9	100.8	100.9	100.8	100.8	100.8											
	D9	4.89	28.18	100.9	101.0	101.0	101.0	100.9	100.9											
	D10	4.92	28.18	100.7	100.7	100.8	100.7	100.7	100.6											
	D11	4.92	28.17	100.7	100.7	100.8	100.7	100.7	100.6											
	D12	4.92	28.18	100.6	100.6	100.7	100.6	100.6	100.5											
2A0000107ECA031C	D1	4.91	28.16	101.0	101.0	101.0	101.0	100.9	100.8											
	D2	4.90	28.16	101.1	101.1	101.1	101.1	101.1	100.9											
	D3	4.87	28.27	101.0	100.9	101.0	100.9	100.9	100.8											
	D4	4.89	28.19	100.8	100.8	100.8	100.8	100.8	100.6											
	D5	4.90	28.18	101.0	101.0	101.0	101.0	100.9	100.8											
	D6	4.89	28.25	101.0	101.0	101.1	101.0	101.0	100.9											
	D7	4.90	28.18	101.0	101.1	101.1	101.0	101.0	100.9											
	D8	4.86	28.22	101.0	101.0	101.1	101.1	101.0	100.9											
	D9	4.87	28.20	100.9	101.0	101.0	101.0	100.8	100.8											
	D10	4.95	28.20	100.8	100.8	100.9	100.8	100.7	100.7											
	D11	4.91	28.18	100.9	100.9	100.9	100.9	100.8	100.7											
	D12	4.92	28.27	100.8	100.9	100.9	100.8	100.8	100.8											

This report is the property of Lumileds Sp. z o.o.

Test Condition 1 55 °C 0.070 A

TABLE 2.2 - PHOTON FLUX, FAR RED MAINTENANCE RESULTS **L150-40705030000S0**

Test Condition 1 55 °C 0.070 A

Load board ID	Device number	Zero hour measurements		Photometric test drive current: 0.070 A Photometric test ambient temperature: 25 ± 2 °C Failures observed: none										
		PF _{FR} (μmol/s)	VF (V)	Photon Flux Far Red Maintenance, 700-800nm (%)										
				1000	2000	3000	4000	5000	6000	7000	8000	9000	10000	11000
		24000010766031C	D1	0.14	28.13	100.6	100.7	101.0	101.3	101.4	101.3	101.6	101.7	101.6
D2	0.15		28.24	100.4	100.6	100.7	100.9	101.5	101.3	101.2	101.5	101.5	101.7	101.8
D3	0.14		28.16	100.7	100.7	100.9	101.3	101.3	101.3	101.5	101.7	101.6	101.8	101.8
D4	0.14		28.24	100.5	100.7	100.8	101.0	101.2	101.5	101.5	101.5	101.6	101.6	101.9
D5	0.15		28.15	100.2	100.2	100.7	100.7	100.8	101.0	100.8	101.2	101.2	101.2	101.4
D6	0.14		28.20	100.4	100.3	100.7	100.7	100.9	101.2	101.1	101.5	101.4	101.4	101.6
D7	0.14		28.14	100.2	100.3	100.6	101.0	101.0	101.1	101.4	101.3	101.4	101.5	101.5
D8	0.14		28.17	100.2	100.3	100.6	100.8	100.9	101.0	101.3	101.2	101.3	101.5	101.4
D9	0.14		28.18	100.5	100.5	100.7	101.0	101.2	101.4	101.5	101.6	101.8	101.6	101.8
D10	0.14		28.18	100.1	100.4	100.8	100.8	101.0	101.0	101.3	101.3	101.2	101.4	101.6
D11	0.14		28.17	100.2	100.3	100.4	100.6	100.8	101.1	101.1	101.3	101.1	101.5	101.5
D12	0.14		28.18	100.0	100.3	100.4	100.7	100.8	100.8	101.0	101.0	100.9	101.0	101.0
2A0000107ECA031C	D1	0.14	28.16	100.5	100.7	100.8	101.3	101.1	101.5	101.3	101.5	101.7	101.8	101.8
	D2	0.14	28.16	100.6	100.9	100.9	101.4	101.3	101.4	101.6	101.4	101.7	101.7	101.9
	D3	0.14	28.27	100.7	100.8	101.1	101.4	101.4	101.5	101.5	101.8	101.6	101.6	101.9
	D4	0.14	28.19	100.3	100.5	100.6	101.0	101.1	101.1	101.1	101.1	101.4	101.4	101.7
	D5	0.14	28.18	100.5	100.7	101.0	101.1	101.3	101.4	101.7	101.5	101.5	101.8	101.8
	D6	0.14	28.25	100.6	100.8	101.2	101.4	101.3	101.5	101.6	101.5	101.5	101.9	102.0
	D7	0.14	28.18	100.7	100.8	100.7	101.1	101.3	101.7	101.6	101.5	101.5	101.6	102.0
	D8	0.14	28.22	100.3	100.8	100.8	101.2	101.2	101.3	101.6	101.5	101.5	101.7	102.0
	D9	0.14	28.20	100.3	100.5	100.9	101.0	101.0	101.3	101.4	101.4	101.5	101.7	101.7
	D10	0.15	28.20	100.4	100.6	100.9	101.0	101.0	101.0	101.2	101.2	101.3	101.5	101.9
	D11	0.14	28.18	100.6	100.7	100.9	101.4	101.0	101.4	101.5	101.5	101.4	101.7	101.9
	D12	0.14	28.27	100.5	100.8	101.1	101.2	101.3	101.4	101.3	101.5	101.6	101.6	101.8

This report is the property of Lumileds. All rights reserved.

Test Condition 1 55 °C 0.070 A

TABLE 2.2 - PHOTON FLUX, FAR RED MAINTENANCE RESULTS L150-40705030000S0

Test Condition 1 55 °C 0.070 A

Load board ID	Device number	Zero hour measurements		Photometric test drive current: 0.070 A											
		PF _{FR} (μmol/s)	VF (V)	Photometric test ambient temperature: 25 ± 2 °C											
				Failures observed: none											
				Photon Flux Far Red Maintenance, 700-800nm (%)											
				12000	13000	14000	15000	16000	17000						
24000010766031C	D1	0.14	28.13	101.8	101.8	101.9	101.9	101.9	101.5						
	D2	0.15	28.24	101.8	101.6	102.0	101.8	101.8	101.6						
	D3	0.14	28.16	102.1	102.0	101.9	101.9	101.8	101.9						
	D4	0.14	28.24	101.8	102.1	101.9	102.0	101.8	101.7						
	D5	0.15	28.15	101.4	101.8	101.7	101.6	101.4	101.5						
	D6	0.14	28.20	101.7	101.8	101.6	101.7	101.6	101.5						
	D7	0.14	28.14	101.6	101.4	101.7	101.5	101.5	101.2						
	D8	0.14	28.17	101.7	101.4	101.6	101.6	101.5	101.5						
	D9	0.14	28.18	101.8	101.6	101.9	102.0	101.8	101.8						
	D10	0.14	28.18	101.3	101.5	101.5	101.7	101.6	101.4						
	D11	0.14	28.17	101.4	101.5	101.2	101.4	101.3	101.3						
	D12	0.14	28.18	101.3	101.4	101.5	101.2	101.2	101.2						
2A0000107ECA031C	D1	0.14	28.16	101.8	102.0	101.8	101.6	102.0	101.8						
	D2	0.14	28.16	101.8	102.1	101.8	102.0	101.8	101.9						
	D3	0.14	28.27	101.8	102.1	101.9	101.9	101.8	101.9						
	D4	0.14	28.19	101.5	101.6	101.6	101.3	101.6	101.3						
	D5	0.14	28.18	101.7	102.0	101.7	101.8	101.8	101.9						
	D6	0.14	28.25	101.9	102.1	102.0	101.9	101.9	101.9						
	D7	0.14	28.18	101.7	102.1	102.2	101.8	102.0	102.0						
	D8	0.14	28.22	101.8	102.1	101.9	101.8	102.0	101.8						
	D9	0.14	28.20	101.9	101.9	102.0	101.9	101.9	101.7						
	D10	0.15	28.20	101.8	101.8	101.7	101.5	101.6	101.8						
	D11	0.14	28.18	101.8	101.9	101.8	101.6	101.9	101.9						
	D12	0.14	28.27	101.6	101.9	101.8	101.7	101.6	101.8						

This report is the property of Lumileds Sp. z o.o.

Test Condition 1 55 °C 0.070 A

TABLE 2.3 - CHROMATICITY SHIFT RESULTS L150-40705030000S0

Test Condition 1 55 °C 0.070 A

Load board ID	Device number	Zero hour measurements			Photometric test drive current: 0.070 A Photometric test ambient temperature: 25 ± 2 °C Failures observed: none													
		u'	v'		Chromaticity shift ($\Delta u'v'$)													
					1000	2000	3000	4000	5000	6000	7000	8000	9000	10000	11000			
24000010766031C	D1	0.2247	0.5050		0.0005	0.0006	0.0006	0.0006	0.0006	0.0006	0.0006	0.0006	0.0006	0.0006	0.0006	0.0006	0.0006	0.0006
	D2	0.2249	0.5058		0.0005	0.0006	0.0005	0.0006	0.0006	0.0005	0.0005	0.0005	0.0006	0.0006	0.0006	0.0006	0.0006	0.0006
	D3	0.2247	0.5042		0.0005	0.0005	0.0005	0.0005	0.0005	0.0006	0.0005	0.0005	0.0006	0.0006	0.0006	0.0006	0.0006	0.0006
	D4	0.2243	0.5051		0.0005	0.0005	0.0006	0.0005	0.0005	0.0005	0.0005	0.0005	0.0006	0.0006	0.0006	0.0006	0.0006	0.0006
	D5	0.2246	0.5054		0.0005	0.0005	0.0006	0.0005	0.0006	0.0006	0.0006	0.0006	0.0006	0.0006	0.0006	0.0006	0.0006	0.0006
	D6	0.2248	0.5053		0.0005	0.0005	0.0006	0.0005	0.0005	0.0005	0.0005	0.0005	0.0006	0.0006	0.0006	0.0006	0.0006	0.0005
	D7	0.2247	0.5051		0.0005	0.0005	0.0005	0.0005	0.0005	0.0005	0.0005	0.0005	0.0005	0.0005	0.0005	0.0005	0.0005	0.0005
	D8	0.2243	0.5054		0.0005	0.0005	0.0005	0.0005	0.0005	0.0005	0.0005	0.0005	0.0005	0.0006	0.0005	0.0005	0.0005	0.0005
	D9	0.2245	0.5059		0.0005	0.0005	0.0005	0.0005	0.0005	0.0005	0.0005	0.0005	0.0005	0.0006	0.0006	0.0006	0.0006	0.0005
	D10	0.2249	0.5051		0.0005	0.0005	0.0005	0.0005	0.0005	0.0005	0.0005	0.0005	0.0005	0.0006	0.0005	0.0006	0.0005	0.0005
	D11	0.2247	0.5051		0.0005	0.0005	0.0005	0.0005	0.0006	0.0006	0.0005	0.0006	0.0006	0.0006	0.0005	0.0005	0.0005	0.0005
	D12	0.2244	0.5057		0.0005	0.0005	0.0005	0.0005	0.0006	0.0006	0.0005	0.0006	0.0006	0.0006	0.0006	0.0006	0.0006	0.0006
2A0000107ECA031C	D1	0.2245	0.5058		0.0005	0.0005	0.0005	0.0006	0.0005	0.0005	0.0006	0.0006	0.0006	0.0006	0.0006	0.0006	0.0005	
	D2	0.2241	0.5060		0.0005	0.0005	0.0005	0.0005	0.0005	0.0005	0.0006	0.0006	0.0006	0.0006	0.0006	0.0006	0.0006	
	D3	0.2248	0.5049		0.0004	0.0005	0.0005	0.0005	0.0005	0.0005	0.0005	0.0005	0.0006	0.0006	0.0006	0.0006	0.0005	
	D4	0.2246	0.5054		0.0004	0.0005	0.0006	0.0006	0.0005	0.0006	0.0006	0.0006	0.0006	0.0006	0.0006	0.0006	0.0006	0.0006
	D5	0.2246	0.5050		0.0005	0.0005	0.0006	0.0005	0.0005	0.0006	0.0005	0.0005	0.0005	0.0005	0.0006	0.0006	0.0005	
	D6	0.2242	0.5059		0.0005	0.0005	0.0005	0.0006	0.0005	0.0005	0.0006	0.0005	0.0006	0.0006	0.0006	0.0006	0.0006	
	D7	0.2247	0.5049		0.0005	0.0005	0.0005	0.0005	0.0005	0.0005	0.0006	0.0005	0.0005	0.0005	0.0006	0.0006	0.0005	
	D8	0.2243	0.5055		0.0005	0.0005	0.0006	0.0006	0.0005	0.0006	0.0005	0.0005	0.0005	0.0005	0.0006	0.0006	0.0005	
	D9	0.2249	0.5057		0.0005	0.0006	0.0006	0.0006	0.0006	0.0006	0.0005	0.0006	0.0005	0.0006	0.0006	0.0006	0.0006	
	D10	0.2247	0.5056		0.0005	0.0005	0.0005	0.0006	0.0005	0.0006	0.0006	0.0006	0.0005	0.0006	0.0006	0.0006	0.0006	
	D11	0.2251	0.5050		0.0004	0.0005	0.0005	0.0005	0.0005	0.0005	0.0005	0.0005	0.0005	0.0005	0.0006	0.0005	0.0005	
	D12	0.2245	0.5044		0.0004	0.0005	0.0005	0.0005	0.0005	0.0005	0.0005	0.0005	0.0005	0.0005	0.0005	0.0005	0.0005	

This report is UNCLASSIFIED

Test Condition 1 55 °C 0.070 A

TABLE 2.3 - CHROMATICITY SHIFT RESULTS L150-40705030000S0

Test Condition 1 55 °C 0.070 A

Load board ID	Device number	Zero hour measurements			Photometric test drive current: 0.070 A Photometric test ambient temperature: 25 ± 2 °C Failures observed: none													
		u'	v'		Chromaticity shift ($\Delta u'v'$)													
					12000	13000	14000	15000	16000	17000								
24000010766031C	D1	0.2247	0.5050		0.0006	0.0006	0.0006	0.0007	0.0007	0.0007								
	D2	0.2249	0.5058		0.0006	0.0005	0.0006	0.0007	0.0007	0.0007								
	D3	0.2247	0.5042		0.0006	0.0006	0.0006	0.0007	0.0007	0.0006								
	D4	0.2243	0.5051		0.0006	0.0006	0.0006	0.0006	0.0007	0.0007								
	D5	0.2246	0.5054		0.0006	0.0006	0.0007	0.0007	0.0007	0.0007								
	D6	0.2248	0.5053		0.0006	0.0006	0.0006	0.0006	0.0007	0.0006								
	D7	0.2247	0.5051		0.0006	0.0005	0.0006	0.0006	0.0006	0.0006	0.0006							
	D8	0.2243	0.5054		0.0006	0.0006	0.0006	0.0006	0.0006	0.0006	0.0006							
	D9	0.2245	0.5059		0.0006	0.0006	0.0006	0.0006	0.0006	0.0006	0.0007							
	D10	0.2249	0.5051		0.0006	0.0006	0.0006	0.0006	0.0006	0.0006	0.0006							
	D11	0.2247	0.5051		0.0006	0.0006	0.0006	0.0006	0.0006	0.0006	0.0006							
	D12	0.2244	0.5057		0.0006	0.0006	0.0006	0.0007	0.0007	0.0007								
2A0000107ECA031C	D1	0.2245	0.5058		0.0006	0.0006	0.0006	0.0006	0.0006	0.0006								
	D2	0.2241	0.5060		0.0006	0.0006	0.0006	0.0006	0.0006	0.0006								
	D3	0.2248	0.5049		0.0006	0.0006	0.0006	0.0006	0.0006	0.0006								
	D4	0.2246	0.5054		0.0006	0.0006	0.0006	0.0007	0.0007	0.0007								
	D5	0.2246	0.5050		0.0006	0.0006	0.0006	0.0006	0.0006	0.0006								
	D6	0.2242	0.5059		0.0006	0.0006	0.0006	0.0006	0.0006	0.0007	0.0007							
	D7	0.2247	0.5049		0.0006	0.0005	0.0006	0.0006	0.0006	0.0007	0.0006							
	D8	0.2243	0.5055		0.0006	0.0006	0.0006	0.0007	0.0006	0.0006	0.0007							
	D9	0.2249	0.5057		0.0006	0.0006	0.0006	0.0006	0.0006	0.0007	0.0006							
	D10	0.2247	0.5056		0.0006	0.0006	0.0006	0.0006	0.0006	0.0007	0.0007							
	D11	0.2251	0.5050		0.0006	0.0005	0.0006	0.0006	0.0006	0.0006	0.0006							
	D12	0.2245	0.5044		0.0005	0.0005	0.0005	0.0006	0.0006	0.0006	0.0006							

This report is UNCLASSIFIED

Test Condition 1 55 °C 0.070 A

TABLE 2.4 - FORWARD VOLTAGE MAINTENANCE RESULTS **L150-40705030000S0**

Test Condition 1 55 °C 0.070 A

Load board ID	Device number	Zero hour measurements	Vf (V)	Photometric test drive current: 0.070 A										
				Photometric test ambient temperature: 25 ± 2 °C										
				Failures observed: none										
				Forward Voltage Maintenance (%)										
				1000	2000	3000	4000	5000	6000	7000	8000	9000	10000	11000
24000010766031C	D1	28.13	100.01	100.03	100.04	100.06	100.06	100.07	100.07	100.07	100.07	100.07	100.08	100.08
	D2	28.24	99.99	100.00	100.01	100.03	100.03	100.04	100.04	100.04	100.04	100.05	100.05	100.05
	D3	28.16	100.01	100.03	100.04	100.05	100.06	100.06	100.07	100.07	100.07	100.07	100.08	100.08
	D4	28.24	100.00	100.02	100.04	100.04	100.05	100.06	100.06	100.07	100.07	100.07	100.07	100.07
	D5	28.15	100.00	100.02	100.03	100.04	100.04	100.05	100.05	100.05	100.05	100.06	100.06	100.06
	D6	28.20	99.98	100.00	100.01	100.02	100.03	100.04	100.04	100.04	100.04	100.05	100.05	100.05
	D7	28.14	100.01	100.03	100.04	100.05	100.05	100.06	100.06	100.07	100.07	100.07	100.07	100.08
	D8	28.17	100.01	100.03	100.04	100.05	100.06	100.07	100.07	100.07	100.07	100.07	100.08	100.08
	D9	28.18	100.01	100.03	100.04	100.05	100.06	100.07	100.07	100.07	100.07	100.07	100.08	100.08
	D10	28.18	100.00	100.02	100.03	100.04	100.05	100.05	100.06	100.06	100.06	100.06	100.07	100.07
	D11	28.17	99.99	100.01	100.02	100.04	100.04	100.05	100.05	100.06	100.06	100.06	100.06	100.07
	D12	28.18	100.00	100.01	100.03	100.04	100.05	100.05	100.05	100.06	100.06	100.06	100.06	100.07
2A0000107ECA031C	D1	28.16	99.98	100.00	100.01	100.02	100.02	100.03	100.03	100.04	100.04	100.05	100.04	
	D2	28.16	100.01	100.02	100.04	100.05	100.05	100.06	100.07	100.07	100.07	100.08	100.08	
	D3	28.27	100.00	100.01	100.02	100.04	100.04	100.05	100.05	100.06	100.06	100.07	100.07	
	D4	28.19	99.99	100.00	100.02	100.03	100.03	100.04	100.04	100.05	100.05	100.06	100.06	
	D5	28.18	100.01	100.03	100.04	100.05	100.05	100.06	100.06	100.07	100.07	100.07	100.08	
	D6	28.25	99.99	100.02	100.02	100.04	100.04	100.05	100.05	100.06	100.06	100.06	100.06	
	D7	28.18	100.01	100.03	100.04	100.05	100.05	100.06	100.07	100.07	100.07	100.08	100.08	
	D8	28.22	100.00	100.02	100.04	100.05	100.05	100.06	100.06	100.07	100.07	100.08	100.08	
	D9	28.20	99.97	99.99	100.00	100.01	100.02	100.03	100.03	100.04	100.04	100.04	100.04	
	D10	28.20	99.98	100.00	100.01	100.02	100.02	100.03	100.03	100.04	100.04	100.04	100.04	
	D11	28.18	99.99	100.01	100.02	100.04	100.04	100.05	100.05	100.06	100.06	100.06	100.06	
	D12	28.27	99.97	99.99	99.99	100.01	100.01	100.02	100.02	100.03	100.03	100.03	100.03	

This report is UNCLASSIFIED

Test Condition 1 55 °C 0.070 A

TABLE 2.4 - FORWARD VOLTAGE MAINTENANCE RESULTS L150-40705030000S0

Test Condition 1 55 °C 0.070 A

Load board ID	Device number	Zero hour measurements		Photometric test drive current: 0.070 A												
		Vf (V)		Photometric test ambient temperature: 25 ± 2 °C												
				Failures observed: none												
		Forward Voltage Maintenance (%)														
				12000	13000	14000	15000	16000	17000							
24000010766031C	D1	28.13	100.08	100.08	100.09	100.10	100.09	100.10								
	D2	28.24	100.05	100.05	100.06	100.07	100.06	100.07								
	D3	28.16	100.08	100.08	100.09	100.10	100.09	100.10								
	D4	28.24	100.07	100.08	100.08	100.09	100.08	100.09								
	D5	28.15	100.06	100.07	100.07	100.08	100.07	100.08								
	D6	28.20	100.05	100.06	100.06	100.07	100.06	100.07								
	D7	28.14	100.07	100.08	100.08	100.09	100.08	100.09								
	D8	28.17	100.08	100.08	100.09	100.09	100.09	100.10								
	D9	28.18	100.08	100.08	100.09	100.09	100.09	100.10								
	D10	28.18	100.07	100.07	100.08	100.08	100.08	100.08								
	D11	28.17	100.07	100.07	100.08	100.08	100.07	100.08								
	D12	28.18	100.08	100.07	100.08	100.08	100.07	100.08								
2A0000107ECA031C	D1	28.16	100.04	100.05	100.05	100.06	100.05	100.06								
	D2	28.16	100.07	100.08	100.08	100.09	100.09	100.09								
	D3	28.27	100.06	100.07	100.07	100.08	100.08	100.08								
	D4	28.19	100.05	100.06	100.06	100.07	100.07	100.07								
	D5	28.18	100.07	100.08	100.08	100.09	100.08	100.09								
	D6	28.25	100.07	100.07	100.07	100.08	100.08	100.08								
	D7	28.18	100.08	100.08	100.09	100.09	100.09	100.09								
	D8	28.22	100.08	100.08	100.09	100.10	100.09	100.10								
	D9	28.20	100.04	100.04	100.05	100.06	99.98	100.06								
	D10	28.20	100.04	100.04	100.05	100.05	100.02	100.06								
	D11	28.18	100.06	100.07	100.07	100.08	100.08	100.08								
	D12	28.27	100.04	100.04	100.04	100.05	100.06	100.05								

This report is the property of Lumileds Sp. z o.o.

Test Condition 2 85 °C 0.070 A

TABLE 3.0 - LUMEN MAINTENANCE RESULTS **L150-40705030000S0**

Test Condition 2 85 °C 0.070 A

Load board ID	Device number	Zero hour measurements		Photometric test drive current: 0.070 A Photometric test ambient temperature: 25 ± 2 °C Failures observed: none											
		Flux (lm)	Vf (V)	Lumen Maintenance (%)											
				1000	2000	3000	4000	5000	6000	7000	8000	9000	10000	11000	
		710000108415031C	D1	376.39	28.17	100.6	100.7	100.6	100.6	100.5	100.3	100.3	100.3	100.3	100.3
D2	375.42		28.18	100.4	100.4	100.4	100.4	100.2	100.1	100.0	100.0	99.9	99.9	99.8	99.8
D3	374.92		28.23	100.8	100.8	100.7	100.7	100.6	100.5	100.4	100.4	100.4	100.4	100.3	100.3
D4	368.57		28.20	100.6	100.6	100.6	100.6	100.5	100.4	100.3	100.3	100.3	100.3	100.2	100.2
D5	376.31		28.19	100.5	100.5	100.5	100.4	100.3	100.2	100.1	100.1	100.1	100.0	100.0	99.9
D6	374.73		28.17	100.6	100.7	100.6	100.6	100.5	100.4	100.4	100.4	100.3	100.3	100.3	100.2
D7	374.02		28.15	100.8	100.8	100.7	100.7	100.6	100.5	100.4	100.4	100.4	100.4	100.3	100.3
D8	372.14		28.17	100.8	100.8	100.7	100.7	100.6	100.5	100.4	100.4	100.4	100.4	100.3	100.3
D9	374.71		28.22	100.7	100.7	100.7	100.6	100.5	100.4	100.3	100.3	100.3	100.3	100.2	100.2
D10	375.09		28.18	100.8	100.7	100.7	100.7	100.5	100.5	100.4	100.4	100.4	100.4	100.3	100.3
D11	374.75		28.16	100.5	100.5	100.5	100.4	100.3	100.2	100.1	100.1	100.1	100.1	100.1	100.0
D12	375.76		28.29	100.7	100.7	100.7	100.6	100.5	100.4	100.3	100.4	100.3	100.3	100.3	100.2
E000001078AF031C	D1	370.42	28.18	100.8	100.8	100.8	100.7	100.6	100.5	100.5	100.5	100.5	100.5	100.5	100.2
	D2	373.94	28.17	100.7	100.8	100.7	100.6	100.6	100.5	100.4	100.5	100.4	100.4	100.3	
	D3	374.31	28.21	100.8	100.8	100.7	100.6	100.5	100.5	100.4	100.4	100.3	100.3	100.2	
	D4	371.14	28.21	100.8	100.8	100.8	100.8	100.6	100.5	100.4	100.5	100.5	100.4	100.4	
	D5	374.92	28.25	100.6	100.6	100.6	100.5	100.4	100.3	100.2	100.2	100.1	100.1	100.0	
	D6	373.16	28.28	100.8	100.8	100.8	100.7	100.6	100.6	100.5	100.5	100.4	100.5	100.4	
	D7	372.21	28.18	100.9	100.9	100.8	100.7	100.6	100.5	100.4	100.4	100.4	100.4	100.4	100.4
	D8	372.69	28.30	100.8	100.8	100.8	100.7	100.6	100.5	100.5	100.5	100.5	100.5	100.5	100.4
	D9	373.48	28.26	100.7	100.7	100.7	100.6	100.5	100.5	100.4	100.4	100.3	100.3	100.3	100.3
	D10	374.77	28.25	100.8	100.8	100.8	100.7	100.7	100.6	100.5	100.6	100.5	100.5	100.5	100.4
	D11	376.33	28.13	100.7	100.7	100.7	100.6	100.4	100.4	100.3	100.3	100.2	100.2	100.2	100.2
	D12	374.70	28.20	100.8	100.9	100.8	100.7	100.6	100.5	100.5	100.5	100.4	100.5	100.5	100.4

This report is the property of Lumileds. All rights reserved.

Test Condition 2 85 °C 0.070 A

TABLE 3.0 - LUMEN MAINTENANCE RESULTS L150-40705030000S0

Test Condition 2 85 °C 0.070 A

Load board ID	Device number	Zero hour measurements		Photometric test drive current: 0.070 A Photometric test ambient temperature: 25 ± 2 °C Failures observed: none																
		Flux (lm)	Vf (V)	Lumen Maintenance (%)																
				12000	13000	14000	15000	16000	17000											
710000108415031C	D1	376.39	28.17	100.1	100.1	100.1	100.0	99.8	99.9											
	D2	375.42	28.18	99.7	99.7	99.7	99.6	99.6	99.5											
	D3	374.92	28.23	100.2	100.1	100.1	100.0	100.0	99.9											
	D4	368.57	28.20	100.1	100.0	100.0	100.0	99.9	99.8											
	D5	376.31	28.19	99.8	99.8	99.8	99.7	99.7	99.6											
	D6	374.73	28.17	100.1	100.1	100.1	100.1	100.1	100.0											
	D7	374.02	28.15	100.2	100.2	100.2	100.2	100.2	100.1											
	D8	372.14	28.17	100.2	100.2	100.2	100.2	100.1	100.1											
	D9	374.71	28.22	100.1	100.0	100.1	100.1	100.1	100.0											
	D10	375.09	28.18	100.2	100.2	100.2	100.2	100.2	100.1											
	D11	374.75	28.16	99.9	99.9	99.9	99.9	99.8	99.7											
	D12	375.76	28.29	100.1	100.1	100.1	100.0	100.0	99.9											
E000001078AF031C	D1	370.42	28.18	100.4	100.4	100.4	100.4	100.3	100.2											
	D2	373.94	28.17	100.3	100.2	100.2	100.2	100.2	100.0											
	D3	374.31	28.21	100.2	100.0	100.1	100.1	100.0	99.8											
	D4	371.14	28.21	100.3	100.3	100.2	100.3	100.2	100.1											
	D5	374.92	28.25	100.0	99.9	99.9	99.9	99.9	99.7											
	D6	373.16	28.28	100.4	100.3	100.3	100.3	100.3	100.2											
	D7	372.21	28.18	100.3	100.2	100.2	100.3	100.2	100.1											
	D8	372.69	28.30	100.4	100.3	100.3	100.3	100.3	100.2											
	D9	373.48	28.26	100.2	100.2	100.2	100.2	100.1	100.0											
	D10	374.77	28.25	100.4	100.3	100.4	100.4	100.3	100.2											
	D11	376.33	28.13	100.1	100.0	100.1	100.0	100.0	99.8											
	D12	374.70	28.20	100.4	100.3	100.3	100.3	100.2	100.2											

This report is the property of Lumileds Sp. z o.o.

Test Condition 2 85 °C 0.070 A														
TABLE 3.1 - PHOTOSYNTHETIC PHOTON FLUX MAINTENANCE RESULTS													L150-40705030000S0	
Test Condition 2 85 °C 0.070 A														
Load board ID	Device number	Zero hour measurements		Photometric test drive current: 0.070 A Photometric test ambient temperature: 25 ± 2 °C Failures observed: none										
		PPF (µmol/s)	VF (V)	Photosynthetic Photon Flux Maintenance (%)										
				1000	2000	3000	4000	5000	6000	7000	8000	9000	10000	11000
710000108415031C	D1	4.92	28.17	100.6	100.6	100.6	100.6	100.5	100.4	100.4	100.4	100.4	100.4	100.3
	D2	4.91	28.18	100.4	100.5	100.4	100.4	100.3	100.2	100.2	100.2	100.1	100.1	100.0
	D3	4.91	28.23	100.7	100.8	100.7	100.7	100.6	100.5	100.5	100.5	100.5	100.4	100.4
	D4	4.84	28.20	100.6	100.6	100.6	100.6	100.5	100.4	100.4	100.5	100.4	100.4	100.3
	D5	4.92	28.19	100.5	100.5	100.5	100.5	100.4	100.3	100.2	100.3	100.2	100.2	100.1
	D6	4.90	28.17	100.6	100.7	100.6	100.6	100.5	100.5	100.5	100.5	100.4	100.4	100.4
	D7	4.89	28.15	100.7	100.7	100.7	100.7	100.6	100.6	100.5	100.6	100.5	100.5	100.5
	D8	4.89	28.17	100.8	100.8	100.7	100.8	100.6	100.6	100.5	100.6	100.5	100.5	100.5
	D9	4.89	28.22	100.7	100.7	100.7	100.6	100.5	100.5	100.4	100.5	100.4	100.4	100.3
	D10	4.90	28.18	100.7	100.7	100.7	100.7	100.6	100.5	100.5	100.5	100.5	100.5	100.4
	D11	4.90	28.16	100.5	100.5	100.5	100.5	100.4	100.3	100.2	100.3	100.3	100.2	100.2
	D12	4.92	28.29	100.7	100.7	100.7	100.7	100.6	100.5	100.5	100.5	100.4	100.4	100.4
E000001078AF031C	D1	4.86	28.18	100.7	100.7	100.8	100.7	100.7	100.6	100.6	100.6	100.6	100.6	100.4
	D2	4.89	28.17	100.7	100.7	100.7	100.7	100.6	100.6	100.5	100.6	100.5	100.5	100.5
	D3	4.90	28.21	100.8	100.8	100.7	100.7	100.6	100.5	100.5	100.5	100.4	100.4	100.3
	D4	4.86	28.21	100.8	100.8	100.8	100.8	100.7	100.6	100.6	100.6	100.6	100.6	100.5
	D5	4.90	28.25	100.6	100.6	100.6	100.5	100.4	100.4	100.3	100.3	100.3	100.3	100.2
	D6	4.89	28.28	100.8	100.8	100.8	100.8	100.7	100.6	100.6	100.6	100.6	100.6	100.6
	D7	4.87	28.18	100.8	100.8	100.8	100.7	100.6	100.6	100.5	100.5	100.5	100.5	100.5
	D8	4.89	28.30	100.8	100.8	100.8	100.8	100.7	100.6	100.6	100.6	100.6	100.6	100.6
	D9	4.89	28.26	100.7	100.7	100.7	100.7	100.6	100.6	100.5	100.5	100.5	100.5	100.5
	D10	4.91	28.25	100.8	100.8	100.8	100.8	100.7	100.7	100.6	100.7	100.6	100.6	100.6
	D11	4.92	28.13	100.7	100.6	100.7	100.6	100.5	100.5	100.4	100.5	100.4	100.4	100.4
	D12	4.90	28.20	100.8	100.8	100.8	100.8	100.7	100.6	100.6	100.6	100.6	100.6	100.6

This report is the property of Lumileds Lighting Company

Test Condition 2 85 °C 0.070 A

TABLE 3.1 - PHOTOSYNTHETIC PHOTON FLUX MAINTENANCE RESULTS **L150-40705030000S0**

Test Condition 2 85 °C 0.070 A

Load board ID	Device number	Zero hour measurements		Photometric test drive current: 0.070 A Photometric test ambient temperature: 25 ± 2 °C Failures observed: none																
		PPF (µmol/s)	VF (V)	Photosynthetic Photon Flux Maintenance (%)																
				12000	13000	14000	15000	16000	17000											
710000108415031C	D1	4.92	28.17	100.3	100.3	100.3	100.2	100.0	100.1											
	D2	4.91	28.18	99.9	99.9	100.0	99.9	99.8	99.8											
	D3	4.91	28.23	100.3	100.3	100.3	100.2	100.2	100.1											
	D4	4.84	28.20	100.3	100.2	100.2	100.2	100.2	100.1											
	D5	4.92	28.19	100.0	100.0	100.0	100.0	99.9	99.9											
	D6	4.90	28.17	100.3	100.3	100.3	100.3	100.3	100.2											
	D7	4.89	28.15	100.4	100.4	100.4	100.4	100.4	100.3											
	D8	4.89	28.17	100.4	100.4	100.4	100.4	100.3	100.3											
	D9	4.89	28.22	100.3	100.2	100.3	100.3	100.3	100.2											
	D10	4.90	28.18	100.4	100.4	100.4	100.4	100.4	100.3											
	D11	4.90	28.16	100.1	100.1	100.1	100.1	100.1	100.0											
	D12	4.92	28.29	100.3	100.3	100.3	100.2	100.3	100.2											
E000001078AF031C	D1	4.86	28.18	100.5	100.5	100.6	100.5	100.5	100.4											
	D2	4.89	28.17	100.5	100.4	100.4	100.4	100.4	100.2											
	D3	4.90	28.21	100.3	100.2	100.2	100.2	100.1	100.0											
	D4	4.86	28.21	100.5	100.4	100.4	100.4	100.4	100.3											
	D5	4.90	28.25	100.2	100.2	100.2	100.1	100.1	100.0											
	D6	4.89	28.28	100.5	100.6	100.5	100.5	100.5	100.4											
	D7	4.87	28.18	100.4	100.4	100.4	100.4	100.4	100.3											
	D8	4.89	28.30	100.5	100.5	100.5	100.5	100.5	100.4											
	D9	4.89	28.26	100.4	100.4	100.4	100.4	100.3	100.2											
	D10	4.91	28.25	100.5	100.5	100.5	100.5	100.5	100.4											
	D11	4.92	28.13	100.3	100.3	100.3	100.2	100.2	100.1											
	D12	4.90	28.20	100.5	100.5	100.5	100.5	100.5	100.4											

This report is the property of Lumileds Sp. z o.o.

Test Condition 2 85 °C 0.070 A

TABLE 3.2 - PHOTON FLUX, FAR RED MAINTENANCE RESULTS **L150-40705030000S0**

Test Condition 2 85 °C 0.070 A

Load board ID	Device number	Zero hour measurements		Photometric test drive current: 0.070 A Photometric test ambient temperature: 25 ± 2 °C Failures observed: none										
		PF _{FR} (μmol/s)	VF (V)	Photon Flux Far Red Maintenance, 700-800nm (%)										
				1000	2000	3000	4000	5000	6000	7000	8000	9000	10000	11000
		710000108415031C	D1	0.15	28.17	101.7	102.3	102.5	102.7	102.9	103.2	103.4	103.6	103.4
D2	0.14		28.18	101.6	101.9	102.3	102.6	102.6	103.0	102.9	103.1	102.9	103.3	103.4
D3	0.14		28.23	101.9	102.2	102.7	103.0	103.1	103.4	103.2	103.6	103.4	103.4	103.7
D4	0.14		28.20	101.7	102.0	102.3	102.7	102.8	103.2	103.2	103.5	103.4	103.4	103.6
D5	0.14		28.19	101.7	102.0	102.2	102.6	103.0	102.8	103.0	103.1	103.1	103.1	103.4
D6	0.14		28.17	101.9	102.1	102.5	102.9	103.1	103.4	103.3	103.9	103.5	103.6	103.8
D7	0.14		28.15	101.5	102.0	102.5	102.7	102.9	103.1	103.1	103.2	103.2	103.5	103.8
D8	0.14		28.17	101.7	102.1	102.4	102.8	102.9	103.3	103.4	103.2	103.3	103.5	103.6
D9	0.14		28.22	101.9	102.4	102.6	102.8	102.9	103.1	103.2	103.5	103.4	103.4	103.6
D10	0.14		28.18	101.8	102.3	102.5	103.0	102.9	103.1	103.2	103.6	103.7	103.6	103.9
D11	0.14		28.16	101.5	101.8	102.4	102.6	102.7	102.9	102.9	103.1	103.3	103.3	103.6
D12	0.14		28.29	101.9	102.2	102.5	102.8	103.0	103.2	103.4	103.6	103.4	103.6	103.8
E000001078AF031C	D1	0.14	28.18	101.8	102.4	102.7	102.9	103.0	103.2	103.4	103.6	103.4	103.6	103.9
	D2	0.14	28.17	102.0	102.0	102.7	102.8	103.2	103.1	103.5	103.6	103.6	103.6	104.1
	D3	0.14	28.21	102.3	102.5	103.0	103.0	103.1	103.4	103.5	103.5	103.6	103.7	103.8
	D4	0.14	28.21	101.9	102.3	102.8	103.0	103.1	103.3	103.3	103.8	103.6	103.6	104.0
	D5	0.14	28.25	102.0	101.9	102.8	102.8	102.8	102.9	102.9	103.4	103.2	103.4	103.4
	D6	0.14	28.28	101.9	102.3	102.7	102.8	103.2	103.3	103.5	103.5	103.6	103.6	103.8
	D7	0.14	28.18	101.8	102.3	102.8	102.9	103.2	103.2	103.4	103.4	103.5	103.5	103.8
	D8	0.14	28.30	101.9	102.4	103.0	103.1	103.4	103.3	103.6	103.8	103.7	103.8	104.1
	D9	0.14	28.26	101.8	102.4	102.5	102.8	103.1	103.0	103.1	103.4	103.5	103.6	103.7
	D10	0.14	28.25	101.8	102.3	102.8	102.9	103.2	102.9	103.5	103.5	103.5	103.7	103.9
	D11	0.14	28.13	102.0	102.3	102.5	103.1	103.1	103.2	103.4	103.4	103.3	103.5	103.7
	D12	0.14	28.20	101.8	102.1	102.4	102.8	103.0	102.9	103.0	103.2	103.2	103.3	103.5

This report is UNCLASSIFIED

Test Condition 2 85 °C 0.070 A

TABLE 3.2 - PHOTON FLUX, FAR RED MAINTENANCE RESULTS L150-40705030000S0

Test Condition 2 85 °C 0.070 A

Load board ID	Device number	Zero hour measurements		Photometric test drive current: 0.070 A									
		PF _{FR} (μmol/s)	VF (V)	Photometric test ambient temperature: 25 ± 2 °C									
				Failures observed: none									
		Photon Flux Far Red Maintenance, 700-800nm (%)											
				12000	13000	14000	15000	16000	17000				
710000108415031C	D1	0.15	28.17	103.7	104.0	103.9	104.0	104.1	103.9				
	D2	0.14	28.18	103.4	103.4	103.5	103.4	103.4	103.4				
	D3	0.14	28.23	103.7	103.7	103.9	103.9	103.7	103.7				
	D4	0.14	28.20	103.7	103.8	103.8	103.9	103.7	103.8				
	D5	0.14	28.19	103.3	103.4	103.4	103.6	103.8	103.5				
	D6	0.14	28.17	104.0	104.1	104.2	104.2	104.1	104.1				
	D7	0.14	28.15	103.6	103.8	103.7	103.8	103.8	103.9				
	D8	0.14	28.17	103.7	103.7	103.7	103.9	103.9	104.0				
	D9	0.14	28.22	103.8	103.6	103.8	104.0	103.9	103.9				
	D10	0.14	28.18	103.8	104.1	103.8	103.9	104.1	103.8				
	D11	0.14	28.16	103.5	103.7	103.7	103.8	103.7	103.8				
	D12	0.14	28.29	103.8	103.7	103.8	103.8	103.9	103.8				
E000001078AF031C	D1	0.14	28.18	104.1	104.0	104.0	104.2	104.1	103.9				
	D2	0.14	28.17	104.1	104.3	104.0	104.0	104.0	104.2				
	D3	0.14	28.21	103.7	104.0	104.2	104.0	104.2	104.0				
	D4	0.14	28.21	104.2	104.1	104.1	104.1	104.2	104.2				
	D5	0.14	28.25	103.6	103.5	103.7	103.6	103.7	103.7				
	D6	0.14	28.28	103.8	104.1	104.1	103.9	104.0	104.1				
	D7	0.14	28.18	104.1	104.3	104.0	103.9	104.2	104.0				
	D8	0.14	28.30	104.1	104.5	104.2	104.3	104.3	104.3				
	D9	0.14	28.26	103.7	103.8	103.9	103.9	104.0	103.8				
	D10	0.14	28.25	104.0	103.9	104.1	104.0	104.2	104.1				
	D11	0.14	28.13	103.7	103.8	103.9	104.1	103.9	104.1				
	D12	0.14	28.20	103.6	103.6	103.6	103.7	103.9	103.9				

This report is UNCLASSIFIED

Test Condition 2 85 °C 0.070 A

TABLE 3.3 - CHROMATICITY SHIFT RESULTS L150-40705030000S0

Test Condition 2 85 °C 0.070 A

Load board ID	Device number	Zero hour measurements			Photometric test drive current: 0.070 A Photometric test ambient temperature: 25 ± 2 °C Failures observed: none										
		u'	v'		Chromaticity shift ($\Delta u'v'$)										
					1000	2000	3000	4000	5000	6000	7000	8000	9000	10000	11000
710000108415031C	D1	0.2248	0.5066		0.0007	0.0008	0.0008	0.0009	0.0010	0.0010	0.0011	0.0011	0.0012	0.0013	0.0013
	D2	0.2242	0.5057		0.0007	0.0008	0.0009	0.0009	0.0010	0.0011	0.0011	0.0012	0.0013	0.0014	0.0014
	D3	0.2246	0.5051		0.0006	0.0007	0.0008	0.0009	0.0009	0.0009	0.0010	0.0011	0.0012	0.0012	0.0012
	D4	0.2250	0.5050		0.0006	0.0008	0.0008	0.0008	0.0009	0.0009	0.0010	0.0010	0.0011	0.0012	0.0012
	D5	0.2248	0.5062		0.0007	0.0008	0.0009	0.0009	0.0010	0.0011	0.0011	0.0012	0.0013	0.0014	0.0014
	D6	0.2241	0.5055		0.0006	0.0008	0.0008	0.0009	0.0010	0.0010	0.0011	0.0011	0.0012	0.0013	0.0013
	D7	0.2242	0.5062		0.0006	0.0008	0.0008	0.0009	0.0010	0.0011	0.0011	0.0012	0.0013	0.0014	0.0014
	D8	0.2247	0.5046		0.0006	0.0008	0.0008	0.0009	0.0010	0.0010	0.0011	0.0012	0.0012	0.0013	0.0013
	D9	0.2248	0.5065		0.0007	0.0008	0.0009	0.0009	0.0010	0.0010	0.0011	0.0012	0.0013	0.0013	0.0014
	D10	0.2240	0.5057		0.0006	0.0007	0.0008	0.0009	0.0009	0.0010	0.0010	0.0011	0.0012	0.0012	0.0013
	D11	0.2246	0.5061		0.0007	0.0008	0.0009	0.0010	0.0010	0.0011	0.0011	0.0012	0.0013	0.0013	0.0014
	D12	0.2246	0.5056		0.0006	0.0008	0.0008	0.0009	0.0009	0.0011	0.0011	0.0012	0.0013	0.0013	0.0014
E000001078AF031C	D1	0.2246	0.5045		0.0006	0.0007	0.0008	0.0008	0.0009	0.0010	0.0010	0.0011	0.0012	0.0012	0.0013
	D2	0.2243	0.5057		0.0006	0.0007	0.0008	0.0009	0.0009	0.0010	0.0011	0.0012	0.0012	0.0012	0.0013
	D3	0.2244	0.5054		0.0006	0.0007	0.0008	0.0008	0.0009	0.0010	0.0011	0.0011	0.0011	0.0012	0.0013
	D4	0.2248	0.5055		0.0006	0.0008	0.0008	0.0009	0.0009	0.0010	0.0011	0.0011	0.0011	0.0012	0.0012
	D5	0.2248	0.5061		0.0007	0.0008	0.0009	0.0010	0.0011	0.0012	0.0013	0.0013	0.0014	0.0015	0.0015
	D6	0.2243	0.5048		0.0006	0.0007	0.0008	0.0009	0.0010	0.0010	0.0011	0.0011	0.0012	0.0013	0.0013
	D7	0.2241	0.5054		0.0007	0.0008	0.0009	0.0009	0.0010	0.0011	0.0011	0.0011	0.0012	0.0013	0.0013
	D8	0.2247	0.5048		0.0006	0.0007	0.0008	0.0008	0.0009	0.0010	0.0010	0.0011	0.0012	0.0012	0.0012
	D9	0.2246	0.5057		0.0007	0.0008	0.0008	0.0009	0.0010	0.0011	0.0011	0.0012	0.0012	0.0013	0.0013
	D10	0.2247	0.5053		0.0007	0.0008	0.0008	0.0009	0.0010	0.0010	0.0011	0.0011	0.0012	0.0012	0.0013
	D11	0.2249	0.5061		0.0007	0.0008	0.0009	0.0009	0.0011	0.0011	0.0011	0.0012	0.0013	0.0013	0.0014
	D12	0.2243	0.5055		0.0007	0.0008	0.0009	0.0009	0.0010	0.0011	0.0012	0.0012	0.0013	0.0014	0.0014

This report is UNCLASSIFIED

Test Condition 2 85 °C 0.070 A

TABLE 3.3 - CHROMATICITY SHIFT RESULTS L150-40705030000S0

Test Condition 2 85 °C 0.070 A

Load board ID	Device number	Zero hour measurements			Photometric test drive current: 0.070 A Photometric test ambient temperature: 25 ± 2 °C Failures observed: none													
		u'	v'		Chromaticity shift ($\Delta u'v'$)													
					12000	13000	14000	15000	16000	17000								
710000108415031C	D1	0.2248	0.5066		0.0014	0.0014	0.0015	0.0015	0.0016	0.0017								
	D2	0.2242	0.5057		0.0015	0.0015	0.0016	0.0017	0.0017	0.0018								
	D3	0.2246	0.5051		0.0013	0.0014	0.0015	0.0015	0.0016	0.0017								
	D4	0.2250	0.5050		0.0012	0.0013	0.0014	0.0015	0.0015	0.0016								
	D5	0.2248	0.5062		0.0015	0.0015	0.0016	0.0017	0.0017	0.0018								
	D6	0.2241	0.5055		0.0014	0.0014	0.0015	0.0015	0.0016	0.0017								
	D7	0.2242	0.5062		0.0014	0.0015	0.0016	0.0017	0.0017	0.0018								
	D8	0.2247	0.5046		0.0014	0.0015	0.0015	0.0016	0.0016	0.0017								
	D9	0.2248	0.5065		0.0014	0.0015	0.0016	0.0016	0.0017	0.0017								
	D10	0.2240	0.5057		0.0013	0.0014	0.0015	0.0015	0.0016	0.0016								
	D11	0.2246	0.5061		0.0014	0.0015	0.0016	0.0016	0.0016	0.0018								
	D12	0.2246	0.5056		0.0014	0.0015	0.0016	0.0017	0.0017	0.0018								
E000001078AF031C	D1	0.2246	0.5045		0.0013	0.0013	0.0014	0.0015	0.0015	0.0016								
	D2	0.2243	0.5057		0.0013	0.0014	0.0014	0.0015	0.0016	0.0016								
	D3	0.2244	0.5054		0.0014	0.0014	0.0015	0.0015	0.0016	0.0016								
	D4	0.2248	0.5055		0.0013	0.0014	0.0014	0.0015	0.0015	0.0016								
	D5	0.2248	0.5061		0.0016	0.0016	0.0017	0.0018	0.0019	0.0019								
	D6	0.2243	0.5048		0.0014	0.0015	0.0015	0.0016	0.0016	0.0017								
	D7	0.2241	0.5054		0.0014	0.0014	0.0015	0.0016	0.0016	0.0017								
	D8	0.2247	0.5048		0.0013	0.0014	0.0014	0.0015	0.0015	0.0016								
	D9	0.2246	0.5057		0.0014	0.0015	0.0015	0.0016	0.0017	0.0017								
	D10	0.2247	0.5053		0.0013	0.0014	0.0015	0.0015	0.0015	0.0016								
	D11	0.2249	0.5061		0.0015	0.0016	0.0016	0.0017	0.0017	0.0018								
	D12	0.2243	0.5055		0.0015	0.0015	0.0016	0.0017	0.0017	0.0018								

This report is UNCLASSIFIED

Test Condition 2 85 °C 0.070 A													
TABLE 3.4 - FORWARD VOLTAGE MAINTENANCE RESULTS												L150-40705030000S0	
Test Condition 2 85 °C 0.070 A													
Load board ID	Device number	Zero hour measurements		Photometric test drive current: 0.070 A Photometric test ambient temperature: 25 ± 2 °C Failures observed: none									
		Vf (V)	Forward Voltage Maintenance (%)										
			1000	2000	3000	4000	5000	6000	7000	8000	9000	10000	11000
710000108415031C	D1	28.17	99.99	100.01	100.02	100.03	100.03	100.04	100.04	100.04	100.04	100.05	100.05
	D2	28.18	100.00	100.03	100.04	100.05	100.05	100.06	100.06	100.06	100.07	100.07	100.07
	D3	28.23	99.99	100.01	100.02	100.03	100.04	100.04	100.05	100.05	100.05	100.05	100.05
	D4	28.20	99.99	100.01	100.02	100.03	100.04	100.04	100.05	100.05	100.05	100.05	100.05
	D5	28.19	100.00	100.02	100.03	100.04	100.05	100.05	100.06	100.06	100.06	100.07	100.07
	D6	28.17	100.02	100.04	100.05	100.06	100.07	100.07	100.08	100.08	100.08	100.08	100.09
	D7	28.15	100.01	100.03	100.03	100.04	100.05	100.05	100.06	100.06	100.06	100.07	100.07
	D8	28.17	100.01	100.03	100.04	100.05	100.05	100.07	100.06	100.06	100.07	100.07	100.07
	D9	28.22	99.99	100.01	100.02	100.03	100.03	100.04	100.05	100.05	100.05	100.05	100.06
	D10	28.18	100.01	100.03	100.04	100.06	100.06	100.07	100.07	100.08	100.08	100.08	100.08
	D11	28.16	100.00	100.02	100.03	100.04	100.04	100.05	100.05	100.06	100.06	100.06	100.06
	D12	28.29	99.98	100.00	100.01	100.02	100.02	100.03	100.03	100.04	100.04	100.04	100.05
E000001078AF031C	D1	28.18	100.02	100.05	100.06	100.07	100.08	100.08	100.09	100.09	100.09	100.10	100.08
	D2	28.17	100.02	100.04	100.05	100.06	100.07	100.07	100.08	100.08	100.08	100.09	100.06
	D3	28.21	99.99	100.01	100.02	100.03	100.04	100.04	100.04	100.05	100.05	100.05	100.04
	D4	28.21	100.02	100.04	100.05	100.06	100.07	100.07	100.08	100.08	100.09	100.09	100.10
	D5	28.25	99.98	100.00	100.01	100.02	100.03	100.03	100.03	100.04	100.04	100.04	100.05
	D6	28.28	99.97	99.99	99.99	100.00	100.01	100.02	100.02	100.02	100.03	100.03	100.04
	D7	28.18	100.01	100.03	100.05	100.05	100.06	100.07	100.07	100.08	100.08	100.08	100.08
	D8	28.30	99.96	99.98	99.99	99.99	100.00	100.01	100.01	100.02	100.02	100.02	100.02
	D9	28.26	99.98	100.00	100.00	100.01	100.02	100.03	100.03	100.03	100.04	100.04	100.04
	D10	28.25	99.97	99.99	100.00	100.01	100.02	100.02	100.03	100.03	100.03	100.04	100.04
	D11	28.13	100.00	100.02	100.03	100.04	100.05	100.05	100.06	100.06	100.06	100.06	100.06
	D12	28.20	99.99	100.01	100.02	100.03	100.04	100.05	100.05	100.05	100.05	100.06	100.06

This report is strictly confidential

Test Condition 2 85 °C 0.070 A

TABLE 3.4 - FORWARD VOLTAGE MAINTENANCE RESULTS L150-40705030000S0

Test Condition 2 85 °C 0.070 A

Load board ID	Device number	Zero hour measurements	Vf (V)	Photometric test drive current: 0.070 A											
				Photometric test ambient temperature: 25 ± 2 °C											
				Failures observed: none											
				Forward Voltage Maintenance (%)											
				12000	13000	14000	15000	16000	17000						
710000108415031C	D1		28.17	100.04	100.05	100.06	100.07	100.05	100.07						
	D2		28.18	100.07	100.08	100.08	100.08	100.08	100.09						
	D3		28.23	100.05	100.06	100.07	100.07	100.08	100.08						
	D4		28.20	100.05	100.06	100.07	100.07	100.09	100.07						
	D5		28.19	100.07	100.07	100.08	100.09	100.10	100.09						
	D6		28.17	100.09	100.09	100.10	100.10	100.11	100.11						
	D7		28.15	100.07	100.07	100.08	100.08	100.08	100.09						
	D8		28.17	100.07	100.08	100.08	100.09	100.08	100.09						
	D9		28.22	100.05	100.06	100.07	100.07	100.07	100.08						
	D10		28.18	100.08	100.09	100.10	100.10	100.10	100.11						
	D11		28.16	100.06	100.07	100.08	100.08	100.07	100.08						
	D12		28.29	100.04	100.05	100.06	100.07	100.06	100.07						
E000001078AF031C	D1		28.18	100.10	100.11	100.12	100.12	100.12	100.13						
	D2		28.17	100.09	100.10	100.10	100.11	100.10	100.11						
	D3		28.21	100.05	100.06	100.07	100.07	100.06	100.07						
	D4		28.21	100.09	100.10	100.11	100.11	100.11	100.11						
	D5		28.25	100.04	100.05	100.05	100.06	100.05	100.06						
	D6		28.28	100.03	100.04	100.04	100.05	100.05	100.05						
	D7		28.18	100.08	100.09	100.09	100.10	100.10	100.10						
	D8		28.30	100.03	100.03	100.04	100.04	100.04	100.05						
	D9		28.26	100.04	100.04	100.05	100.06	100.05	100.06						
	D10		28.25	100.04	100.05	100.05	100.06	100.05	100.06						
	D11		28.13	100.06	100.07	100.07	100.08	100.07	100.08						
	D12		28.20	100.06	100.07	100.07	100.07	100.07	100.08						

This report is UNCLASSIFIED

Test Condition 3 105 °C 0.070 A

TABLE 4.0 - LUMEN MAINTENANCE RESULTS **L150-40705030000S0**

Test Condition 3 105 °C 0.070 A

Load board ID	Device number	Zero hour measurements		Photometric test drive current: 0.070 A Photometric test ambient temperature: 25 ± 2 °C Failures observed: none										
		Flux (lm)	Vf (V)	Lumen Maintenance (%)										
				1000	2000	3000	4000	5000	6000	7000	8000	9000	10000	11000
		020000107325031C	D1	373.05	28.18	100.3	100.1	99.9	99.7	99.7	99.5	99.4	99.3	99.3
D2	370.11		28.19	100.5	100.3	100.1	99.9	99.9	99.6	99.5	99.4	99.3	99.5	99.5
D3	370.39		28.20	100.4	100.3	100.1	100.0	99.9	99.7	99.6	99.6	99.5	99.7	99.6
D4	373.03		28.20	100.4	100.3	100.0	99.9	99.9	99.6	99.5	99.5	99.4	99.5	99.4
D5	373.04		28.19	100.7	100.6	100.4	100.2	100.2	99.9	99.8	99.8	99.7	99.7	99.6
D6	370.88		28.17	100.4	100.2	100.0	99.9	99.9	99.6	99.6	99.6	99.5	99.7	99.7
D7	369.71		28.19	100.6	100.3	100.1	100.0	100.0	99.9	99.8	99.8	99.7	99.7	99.7
D8	374.65		28.18	100.2	100.0	99.8	99.7	99.6	99.3	99.1	99.0	98.9	98.9	98.8
D9	376.18		28.28	100.4	100.3	100.1	100.0	99.9	99.7	99.6	99.5	99.4	99.5	99.4
D10	372.16		28.29	100.5	100.4	100.3	100.1	100.2	99.9	99.8	99.8	99.7	99.8	99.7
D11	376.11		28.27	100.4	100.2	100.0	99.8	99.8	99.4	99.4	99.3	99.1	99.2	99.1
D12	377.56		28.19	100.1	99.9	99.7	99.6	99.5	99.2	99.1	99.0	98.9	99.0	98.9
C400001082AC031C	D1	369.84	28.15	100.3	100.2	99.9	99.8	99.6	99.5	99.4	99.3	99.2	99.3	99.1
	D2	371.61	28.19	100.3	100.1	99.9	99.9	99.7	99.5	99.4	99.4	99.3	99.3	99.1
	D3	373.95	28.18	100.5	100.4	100.2	100.1	99.9	99.7	99.6	99.5	99.4	99.3	99.1
	D4	372.81	28.23	100.4	100.3	100.1	99.9	99.8	99.6	99.5	99.4	99.3	99.3	99.2
	D5	373.88	28.17	100.4	100.2	100.0	99.9	99.7	99.5	99.4	99.4	99.3	99.4	99.3
	D6	373.39	28.30	100.4	100.2	100.0	99.9	99.8	99.5	99.5	99.5	99.4	99.4	99.3
	D7	372.32	28.21	100.4	100.3	100.0	99.9	99.7	99.5	99.4	99.3	99.2	99.2	99.1
	D8	375.33	28.28	100.3	100.2	100.0	99.9	99.7	99.6	99.5	99.6	99.5	99.7	99.7
	D9	373.72	28.22	100.3	100.1	100.0	99.8	99.7	99.6	99.5	99.5	99.4	99.4	99.3
	D10	375.02	28.15	100.2	100.1	99.9	99.8	99.6	99.4	99.3	99.3	99.1	99.1	99.0
	D11	376.29	28.12	100.2	100.0	99.8	99.7	99.5	99.3	99.1	99.0	98.8	98.7	98.4
	D12	374.51	28.16	100.3	100.1	99.9	99.8	99.5	99.3	99.2	99.2	99.1	99.1	99.0

This report is the property of Lumileds Factory S.p.A.

Test Condition 3 105 °C 0.070 A

TABLE 4.0 - LUMEN MAINTENANCE RESULTS L150-40705030000S0

Test Condition 3 105 °C 0.070 A

Load board ID	Device number	Zero hour measurements		Photometric test drive current: 0.070 A Photometric test ambient temperature: 25 ± 2 °C Failures observed: none																
		Flux (lm)	Vf (V)	Lumen Maintenance (%)																
				12000	13000	14000	15000	16000	17000											
020000107325031C	D1	373.05	28.18	99.3	99.2	99.3	99.5	99.7	99.6											
	D2	370.11	28.19	99.4	99.3	99.2	99.3	99.4	99.2											
	D3	370.39	28.20	99.5	99.5	99.5	99.8	99.9	99.8											
	D4	373.03	28.20	99.3	99.2	99.2	99.5	99.5	99.3											
	D5	373.04	28.19	99.6	99.5	99.4	99.5	99.6	99.4											
	D6	370.88	28.17	99.6	99.7	99.7	100.0	100.1	99.9											
	D7	369.71	28.19	99.6	99.5	99.5	99.7	99.9	99.7											
	D8	374.65	28.18	98.6	98.5	98.4	98.5	98.5	98.3											
	D9	376.18	28.28	99.4	99.4	99.4	99.8	100.0	99.8											
	D10	372.16	28.29	99.7	99.6	99.7	99.9	100.2	100.0											
	D11	376.11	28.27	98.9	98.9	98.8	98.9	98.9	98.7											
	D12	377.56	28.19	98.8	98.8	98.9	99.2	99.3	99.2											
C400001082AC031C	D1	369.84	28.15	99.1	99.0	99.1	99.4	99.4	99.2											
	D2	371.61	28.19	99.0	98.9	98.9	99.1	99.0	98.8											
	D3	373.95	28.18	98.9	98.6	98.5	98.6	98.5	98.2											
	D4	372.81	28.23	99.1	99.1	99.1	99.2	99.2	99.1											
	D5	373.88	28.17	99.2	99.2	99.2	99.3	99.3	99.1											
	D6	373.39	28.30	99.2	99.2	99.1	99.4	99.4	99.2											
	D7	372.32	28.21	99.0	98.8	98.8	98.8	98.8	98.6											
	D8	375.33	28.28	99.6	99.5	99.7	100.4	100.4	100.1											
	D9	373.72	28.22	99.2	99.2	99.3	99.6	99.7	99.6											
	D10	375.02	28.15	98.8	98.6	98.5	98.6	98.5	98.3											
	D11	376.29	28.12	98.2	97.4	97.6	97.7	97.6	97.3											
	D12	374.51	28.16	99.0	98.9	98.8	99.2	99.2	99.0											

This report is issued by Lumileds Lighting Factory Sp. z o.o.

Test Condition 3 105 °C 0.070 A

TABLE 4.1 - PHOTOSYNTHETIC PHOTON FLUX MAINTENANCE RESULTS **L150-40705030000S0**

Test Condition 3 105 °C 0.070 A

Load board ID	Device number	Zero hour measurements		Photometric test drive current: 0.070 A Photometric test ambient temperature: 25 ± 2 °C Failures observed: none										
		PPF (µmol/s)	VF (V)	Photosynthetic Photon Flux Maintenance (%)										
				1000	2000	3000	4000	5000	6000	7000	8000	9000	10000	11000
020000107325031C	D1	4.88	28.18	100.3	100.2	100.1	100.0	100.0	99.8	99.7	99.7	99.6	99.7	99.7
	D2	4.86	28.19	100.6	100.4	100.3	100.2	100.2	99.9	99.9	99.8	99.7	99.9	99.9
	D3	4.85	28.20	100.5	100.4	100.3	100.2	100.2	100.0	99.9	99.9	99.9	100.0	100.0
	D4	4.89	28.20	100.4	100.4	100.2	100.1	100.2	99.9	99.9	99.9	99.8	99.9	99.8
	D5	4.89	28.19	100.8	100.6	100.5	100.5	100.5	100.2	100.1	100.1	100.0	100.1	100.0
	D6	4.87	28.17	100.4	100.3	100.2	100.2	100.2	99.9	99.9	100.0	99.9	100.1	100.1
	D7	4.85	28.19	100.6	100.4	100.3	100.2	100.3	100.2	100.1	100.1	100.0	100.1	100.1
	D8	4.91	28.18	100.3	100.2	100.0	100.0	99.9	99.6	99.5	99.4	99.3	99.3	99.2
	D9	4.91	28.28	100.5	100.4	100.3	100.2	100.2	100.0	99.9	99.9	99.8	99.9	99.9
	D10	4.89	28.29	100.6	100.5	100.4	100.4	100.4	100.2	100.1	100.2	100.1	100.2	100.1
	D11	4.93	28.27	100.4	100.3	100.2	100.1	100.1	99.8	99.7	99.6	99.5	99.6	99.5
	D12	4.93	28.19	100.2	100.1	99.9	99.8	99.8	99.5	99.4	99.4	99.3	99.4	99.3
C400001082AC031C	D1	4.85	28.15	100.4	100.3	100.1	100.0	99.9	99.8	99.7	99.7	99.6	99.6	99.5
	D2	4.87	28.19	100.3	100.2	100.1	100.1	99.9	99.8	99.7	99.7	99.6	99.6	99.6
	D3	4.88	28.18	100.6	100.5	100.3	100.2	100.1	100.0	99.9	99.8	99.7	99.7	99.5
	D4	4.89	28.23	100.5	100.4	100.2	100.2	100.0	99.9	99.8	99.8	99.7	99.7	99.6
	D5	4.91	28.17	100.4	100.3	100.2	100.1	100.0	99.8	99.8	99.7	99.7	99.8	99.7
	D6	4.89	28.30	100.5	100.4	100.2	100.1	100.0	99.9	99.8	99.8	99.8	99.8	99.8
	D7	4.88	28.21	100.5	100.4	100.2	100.1	100.0	99.8	99.7	99.7	99.6	99.7	99.6
	D8	4.92	28.28	100.4	100.3	100.2	100.1	100.0	99.9	99.9	99.9	99.9	100.1	100.1
	D9	4.89	28.22	100.3	100.2	100.2	100.1	100.0	99.9	99.8	99.8	99.8	99.8	99.8
	D10	4.91	28.15	100.3	100.2	100.1	100.0	99.9	99.7	99.7	99.6	99.5	99.5	99.4
	D11	4.91	28.12	100.3	100.1	100.0	99.9	99.7	99.6	99.4	99.4	99.2	99.1	98.9
	D12	4.91	28.16	100.4	100.3	100.1	100.0	99.8	99.7	99.6	99.6	99.5	99.6	99.5

This report is the property of Lumileds. It is confidential and its use is restricted to the intended recipient.

Test Condition 3 105 °C 0.070 A

TABLE 4.1 - PHOTOSYNTHETIC PHOTON FLUX MAINTENANCE RESULTS L150-40705030000S0

Test Condition 3 105 °C 0.070 A

Load board ID	Device number	Zero hour measurements		Photometric test drive current: 0.070 A																
		PPF (µmol/s)	VF (V)	Photometric test ambient temperature: 25 ± 2 °C																
				Failures observed: none																
				Photosynthetic Photon Flux Maintenance (%)																
12000	13000	14000	15000	16000	17000															
020000107325031C	D1	4.88	28.18	99.7	99.7	99.7	99.9	100.1	99.9											
	D2	4.86	28.19	99.8	99.7	99.7	99.7	99.9	99.6											
	D3	4.85	28.20	99.9	99.9	99.9	100.1	100.3	100.1											
	D4	4.89	28.20	99.7	99.7	99.7	99.9	99.9	99.8											
	D5	4.89	28.19	99.9	99.9	99.8	99.9	100.0	99.8											
	D6	4.87	28.17	100.0	100.1	100.2	100.4	100.4	100.3											
	D7	4.85	28.19	100.0	100.0	100.0	100.1	100.3	100.1											
	D8	4.91	28.18	99.1	99.0	98.9	98.9	99.0	98.8											
	D9	4.91	28.28	99.8	99.9	99.9	100.2	100.4	100.3											
	D10	4.89	28.29	100.1	100.1	100.1	100.3	100.5	100.4											
	D11	4.93	28.27	99.4	99.3	99.3	99.3	99.3	99.1											
	D12	4.93	28.19	99.3	99.3	99.3	99.6	99.7	99.6											
C400001082AC031C	D1	4.85	28.15	99.5	99.4	99.5	99.7	99.8	99.5											
	D2	4.87	28.19	99.4	99.3	99.3	99.5	99.4	99.1											
	D3	4.88	28.18	99.3	99.1	99.0	99.0	98.9	98.7											
	D4	4.89	28.23	99.6	99.5	99.5	99.7	99.7	99.6											
	D5	4.91	28.17	99.7	99.6	99.7	99.7	99.7	99.6											
	D6	4.89	28.30	99.6	99.6	99.6	99.8	99.8	99.6											
	D7	4.88	28.21	99.4	99.3	99.3	99.3	99.2	99.1											
	D8	4.92	28.28	100.0	100.0	100.1	100.8	100.8	100.6											
	D9	4.89	28.22	99.7	99.7	99.8	100.0	100.1	100.0											
	D10	4.91	28.15	99.2	99.1	99.0	99.0	99.0	98.8											
	D11	4.91	28.12	98.6	97.9	98.2	98.2	98.1	97.8											
	D12	4.91	28.16	99.4	99.4	99.3	99.6	99.7	99.5											

This report is supplied by Lumileds Lighting Factory Sp. z o.o.

Test Condition 3 105 °C 0.070 A

TABLE 4.2 - PHOTON FLUX, FAR RED MAINTENANCE RESULTS **L150-40705030000S0**

Test Condition 3 105 °C 0.070 A

Load board ID	Device number	Zero hour measurements		Photometric test drive current: 0.070 A Photometric test ambient temperature: 25 ± 2 °C Failures observed: none										
		PF _{FR} (μmol/s)	VF (V)	Photon Flux Far Red Maintenance, 700-800nm (%)										
				1000	2000	3000	4000	5000	6000	7000	8000	9000	10000	11000
020000107325031C	D1	0.14	28.18	103.2	103.8	104.5	104.7	105.2	105.4	105.4	105.7	106.0	106.0	106.1
	D2	0.14	28.19	103.6	104.3	104.8	105.2	105.7	105.8	106.0	106.0	106.0	106.3	106.4
	D3	0.14	28.20	103.4	103.9	104.8	105.0	105.4	105.5	105.7	106.0	106.0	106.5	106.7
	D4	0.14	28.20	103.4	104.0	104.7	105.0	105.4	105.7	105.7	105.9	106.2	106.2	106.5
	D5	0.14	28.19	103.2	103.9	104.5	105.0	105.1	105.4	105.7	105.7	105.8	105.9	106.3
	D6	0.14	28.17	103.3	104.2	104.6	105.2	105.5	105.9	105.8	106.3	106.4	106.7	106.7
	D7	0.14	28.19	103.5	104.0	104.8	104.9	105.7	105.5	106.1	106.1	106.4	106.5	106.8
	D8	0.15	28.18	103.2	103.7	104.2	104.7	105.0	104.9	105.2	105.2	105.5	105.5	105.5
	D9	0.14	28.28	103.2	104.0	104.5	104.9	105.1	105.4	105.7	105.7	106.1	106.1	106.1
	D10	0.14	28.29	103.4	104.1	104.8	105.3	105.4	105.7	105.8	105.9	106.2	106.4	106.4
	D11	0.15	28.27	103.2	103.8	104.5	105.0	105.2	105.4	105.4	105.6	105.7	105.8	105.8
	D12	0.14	28.19	103.0	103.7	104.1	104.5	105.0	104.9	105.1	105.6	105.4	105.7	105.7
C400001082AC031C	D1	0.14	28.15	103.5	104.3	104.9	105.2	105.3	105.3	105.8	105.9	106.2	106.1	106.5
	D2	0.14	28.19	103.6	104.2	104.8	105.2	105.4	105.5	105.7	105.9	106.2	106.0	106.5
	D3	0.14	28.18	103.4	104.3	104.8	105.2	105.2	105.5	105.5	105.7	105.9	106.1	106.1
	D4	0.14	28.23	103.6	104.4	104.9	105.3	105.7	105.7	105.9	106.1	106.5	106.5	106.7
	D5	0.14	28.17	103.6	104.4	104.9	105.4	105.5	105.5	106.0	105.9	106.2	106.3	106.9
	D6	0.14	28.30	103.3	104.3	105.0	105.5	105.5	105.6	105.9	106.5	106.4	106.5	106.9
	D7	0.14	28.21	103.4	104.2	104.7	105.1	105.2	105.5	105.6	105.9	105.9	106.2	106.3
	D8	0.14	28.28	103.5	104.3	104.8	105.3	105.4	105.5	105.8	106.2	106.1	106.6	107.0
	D9	0.14	28.22	103.4	104.4	104.9	105.3	105.3	105.6	105.8	106.1	106.3	106.3	106.8
	D10	0.14	28.15	103.0	103.9	104.5	105.2	105.3	105.5	105.6	105.9	105.9	106.0	106.2
	D11	0.14	28.12	103.3	104.2	104.8	105.3	105.3	105.3	105.7	105.6	105.7	105.8	105.8
	D12	0.14	28.16	103.4	104.2	104.8	105.1	105.1	105.3	105.4	105.7	105.7	106.2	106.4

This report is the property of Lumileds. All rights reserved.

Test Condition 3 105 °C 0.070 A

TABLE 4.2 - PHOTON FLUX, FAR RED MAINTENANCE RESULTS L150-40705030000S0

Test Condition 3 105 °C 0.070 A

Load board ID	Device number	Zero hour measurements		Photometric test drive current: 0.070 A Photometric test ambient temperature: 25 ± 2 °C Failures observed: none														
		PF _{FR} (μmol/s)	VF (V)	Photon Flux Far Red Maintenance, 700-800nm (%)														
				12000	13000	14000	15000	16000	17000									
020000107325031C	D1	0.14	28.18	106.4	106.6	106.7	106.8	107.2	107.1									
	D2	0.14	28.19	106.8	106.9	106.6	106.9	107.3	107.1									
	D3	0.14	28.20	106.9	106.8	106.9	107.7	108.0	107.6									
	D4	0.14	28.20	106.6	106.8	106.8	107.1	107.4	107.5									
	D5	0.14	28.19	106.5	106.7	106.5	106.8	106.9	107.1									
	D6	0.14	28.17	107.3	107.2	107.4	107.4	108.1	108.1									
	D7	0.14	28.19	107.0	107.0	107.0	107.2	107.7	107.8									
	D8	0.15	28.18	105.8	105.9	105.6	105.7	106.1	105.9									
	D9	0.14	28.28	106.5	106.9	106.7	107.1	107.8	107.9									
	D10	0.14	28.29	106.9	107.0	107.0	107.5	107.7	107.9									
	D11	0.15	28.27	106.0	106.0	106.1	106.3	106.5	106.4									
	D12	0.14	28.19	105.7	105.9	106.0	106.3	106.7	106.7									
C400001082AC031C	D1	0.14	28.15	106.3	106.6	106.7	107.3	107.4	107.3									
	D2	0.14	28.19	106.3	106.5	106.6	106.7	106.9	106.8									
	D3	0.14	28.18	105.9	105.7	105.8	105.7	105.9	105.8									
	D4	0.14	28.23	106.7	107.1	106.9	107.2	107.3	107.3									
	D5	0.14	28.17	106.9	106.7	106.9	107.1	107.3	107.4									
	D6	0.14	28.30	106.7	107.1	106.9	107.3	107.7	107.6									
	D7	0.14	28.21	106.4	106.6	106.4	106.5	106.6	106.7									
	D8	0.14	28.28	107.0	107.1	107.1	108.0	108.3	108.4									
	D9	0.14	28.22	106.8	107.1	107.0	107.5	107.8	108.1									
	D10	0.14	28.15	106.1	106.1	106.0	106.0	106.1	106.3									
	D11	0.14	28.12	105.6	104.9	105.0	105.0	105.3	105.2									
	D12	0.14	28.16	106.3	106.5	106.4	106.8	107.1	107.2									

This report is the property of Lumileds Sp. z o.o.

Test Condition 3 105 °C 0.070 A

TABLE 4.3 - CHROMATICITY SHIFT RESULTS L150-40705030000S0

Test Condition 3 105 °C 0.070 A

Load board ID	Device number	Zero hour measurements			Photometric test drive current: 0.070 A Photometric test ambient temperature: 25 ± 2 °C Failures observed: none										
		u'	v'		Chromaticity shift ($\Delta u'v'$)										
					1000	2000	3000	4000	5000	6000	7000	8000	9000	10000	11000
020000107325031C	D1	0.2243	0.5056		0.0010	0.0012	0.0014	0.0016	0.0018	0.0020	0.0021	0.0022	0.0023	0.0024	0.0025
	D2	0.2246	0.5046		0.0009	0.0012	0.0014	0.0016	0.0018	0.0020	0.0021	0.0022	0.0023	0.0023	0.0024
	D3	0.2243	0.5049		0.0009	0.0012	0.0014	0.0016	0.0017	0.0019	0.0020	0.0021	0.0023	0.0023	0.0024
	D4	0.2246	0.5052		0.0009	0.0012	0.0014	0.0016	0.0018	0.0019	0.0020	0.0022	0.0023	0.0023	0.0024
	D5	0.2243	0.5051		0.0008	0.0011	0.0012	0.0014	0.0016	0.0018	0.0019	0.0020	0.0021	0.0022	0.0023
	D6	0.2248	0.5048		0.0010	0.0012	0.0014	0.0016	0.0017	0.0019	0.0020	0.0021	0.0023	0.0022	0.0024
	D7	0.2250	0.5048		0.0009	0.0011	0.0013	0.0015	0.0016	0.0018	0.0019	0.0020	0.0022	0.0023	0.0023
	D8	0.2252	0.5057		0.0010	0.0012	0.0014	0.0016	0.0018	0.0020	0.0021	0.0022	0.0024	0.0025	0.0026
	D9	0.2246	0.5062		0.0010	0.0012	0.0014	0.0016	0.0018	0.0020	0.0021	0.0022	0.0023	0.0024	0.0025
	D10	0.2244	0.5037		0.0009	0.0012	0.0014	0.0016	0.0017	0.0019	0.0020	0.0021	0.0023	0.0023	0.0025
	D11	0.2252	0.5056		0.0009	0.0012	0.0014	0.0015	0.0017	0.0019	0.0020	0.0021	0.0023	0.0024	0.0025
	D12	0.2245	0.5063		0.0009	0.0012	0.0014	0.0015	0.0018	0.0019	0.0021	0.0022	0.0023	0.0024	0.0025
C400001082AC031C	D1	0.2250	0.5049		0.0009	0.0011	0.0013	0.0014	0.0016	0.0018	0.0019	0.0020	0.0022	0.0022	0.0023
	D2	0.2248	0.5051		0.0009	0.0011	0.0013	0.0015	0.0016	0.0018	0.0019	0.0020	0.0022	0.0023	0.0024
	D3	0.2244	0.5067		0.0009	0.0011	0.0012	0.0014	0.0016	0.0017	0.0019	0.0020	0.0021	0.0023	0.0024
	D4	0.2247	0.5050		0.0008	0.0010	0.0012	0.0014	0.0016	0.0017	0.0019	0.0020	0.0022	0.0022	0.0024
	D5	0.2247	0.5050		0.0009	0.0011	0.0014	0.0015	0.0018	0.0019	0.0020	0.0021	0.0023	0.0024	0.0025
	D6	0.2248	0.5054		0.0009	0.0011	0.0013	0.0015	0.0017	0.0018	0.0019	0.0020	0.0022	0.0023	0.0024
	D7	0.2248	0.5051		0.0009	0.0011	0.0013	0.0016	0.0017	0.0019	0.0020	0.0021	0.0023	0.0024	0.0025
	D8	0.2243	0.5045		0.0010	0.0012	0.0014	0.0017	0.0019	0.0020	0.0022	0.0022	0.0023	0.0024	0.0025
	D9	0.2248	0.5056		0.0009	0.0012	0.0014	0.0016	0.0017	0.0019	0.0020	0.0021	0.0022	0.0023	0.0024
	D10	0.2246	0.5052		0.0009	0.0011	0.0013	0.0015	0.0016	0.0018	0.0019	0.0020	0.0022	0.0023	0.0024
	D11	0.2241	0.5063		0.0009	0.0011	0.0014	0.0015	0.0017	0.0019	0.0021	0.0022	0.0024	0.0025	0.0027
	D12	0.2243	0.5045		0.0009	0.0011	0.0013	0.0015	0.0017	0.0019	0.0021	0.0022	0.0023	0.0024	0.0026

This report is UNCLASSIFIED

Test Condition 3 105 °C 0.070 A

TABLE 4.3 - CHROMATICITY SHIFT RESULTS L150-40705030000S0

Test Condition 3 105 °C 0.070 A

Load board ID	Device number	Zero hour measurements			Photometric test drive current: 0.070 A Photometric test ambient temperature: 25 ± 2 °C Failures observed: none													
		u'	v'		Chromaticity shift ($\Delta u'v'$)													
					12000	13000	14000	15000	16000	17000								
020000107325031C	D1	0.2243	0.5056		0.0026	0.0027	0.0028	0.0028	0.0028	0.0027								
	D2	0.2246	0.5046		0.0026	0.0027	0.0028	0.0028	0.0027	0.0027								
	D3	0.2243	0.5049		0.0025	0.0025	0.0026	0.0024	0.0024	0.0023								
	D4	0.2246	0.5052		0.0025	0.0027	0.0027	0.0026	0.0026	0.0026								
	D5	0.2243	0.5051		0.0024	0.0026	0.0026	0.0026	0.0026	0.0025								
	D6	0.2248	0.5048		0.0025	0.0025	0.0026	0.0026	0.0027	0.0027								
	D7	0.2250	0.5048		0.0025	0.0025	0.0027	0.0027	0.0026	0.0026								
	D8	0.2252	0.5057		0.0028	0.0029	0.0030	0.0031	0.0031	0.0031								
	D9	0.2246	0.5062		0.0026	0.0026	0.0027	0.0026	0.0025	0.0026								
	D10	0.2244	0.5037		0.0025	0.0026	0.0027	0.0027	0.0027	0.0027								
	D11	0.2252	0.5056		0.0027	0.0028	0.0029	0.0028	0.0028	0.0028								
	D12	0.2245	0.5063		0.0026	0.0027	0.0028	0.0027	0.0028	0.0028								
C400001082AC031C	D1	0.2250	0.5049		0.0024	0.0025	0.0026	0.0025	0.0025	0.0024								
	D2	0.2248	0.5051		0.0025	0.0026	0.0027	0.0026	0.0026	0.0025								
	D3	0.2244	0.5067		0.0025	0.0027	0.0029	0.0028	0.0029	0.0029								
	D4	0.2247	0.5050		0.0025	0.0025	0.0027	0.0026	0.0027	0.0027								
	D5	0.2247	0.5050		0.0025	0.0026	0.0028	0.0027	0.0028	0.0028								
	D6	0.2248	0.5054		0.0025	0.0025	0.0027	0.0026	0.0026	0.0026								
	D7	0.2248	0.5051		0.0026	0.0027	0.0029	0.0028	0.0028	0.0027								
	D8	0.2243	0.5045		0.0026	0.0027	0.0028	0.0025	0.0026	0.0027								
	D9	0.2248	0.5056		0.0025	0.0026	0.0027	0.0026	0.0025	0.0025								
	D10	0.2246	0.5052		0.0025	0.0027	0.0028	0.0028	0.0028	0.0028								
	D11	0.2241	0.5063		0.0028	0.0030	0.0032	0.0032	0.0032	0.0032								
	D12	0.2243	0.5045		0.0026	0.0027	0.0029	0.0028	0.0028	0.0027								

This report is UNCLASSIFIED

Test Condition 3 105 °C 0.070 A

TABLE 4.4 - FORWARD VOLTAGE MAINTENANCE RESULTS L150-40705030000S0

Test Condition 3 105 °C 0.070 A

Load board ID	Device number	Zero hour measurements		Photometric test drive current: 0.070 A Photometric test ambient temperature: 25 ± 2 °C Failures observed: none										
		Vf (V)		Forward Voltage Maintenance (%)										
				1000	2000	3000	4000	5000	6000	7000	8000	9000	10000	11000
020000107325031C	D1	28.18	100.02	100.05	100.06	100.07	100.09	100.09	100.10	100.10	100.10	100.10	100.11	100.11
	D2	28.19	100.01	100.03	100.05	100.06	100.07	100.08	100.10	100.09	100.09	100.09	100.10	100.10
	D3	28.20	100.00	100.02	100.04	100.05	100.06	100.06	100.08	100.08	100.08	100.08	100.08	100.08
	D4	28.20	100.00	100.03	100.04	100.05	100.07	100.07	100.08	100.08	100.08	100.08	100.09	100.09
	D5	28.19	100.01	100.03	100.04	100.05	100.07	100.06	100.07	100.07	100.07	100.08	100.08	100.08
	D6	28.17	100.02	100.04	100.05	100.07	100.09	100.08	100.09	100.09	100.09	100.10	100.10	100.10
	D7	28.19	100.01	100.03	100.04	100.05	100.06	100.07	100.07	100.07	100.07	100.08	100.08	100.09
	D8	28.18	100.01	100.03	100.04	100.05	100.05	100.07	100.06	100.07	100.07	100.07	100.08	100.08
	D9	28.28	99.99	100.01	100.03	100.04	100.05	100.06	100.07	100.08	100.08	100.08	100.08	100.09
	D10	28.29	99.98	100.00	100.01	100.03	100.04	100.05	100.05	100.07	100.07	100.07	100.07	100.07
	D11	28.27	99.98	100.00	100.01	100.03	100.04	100.04	100.04	100.04	100.05	100.05	100.05	100.06
	D12	28.19	100.00	100.02	100.03	100.05	100.06	100.06	100.06	100.07	100.07	100.07	100.07	100.08
C400001082AC031C	D1	28.15	100.02	100.04	100.04	100.06	100.07	100.07	100.10	100.11	100.09	100.10	100.11	
	D2	28.19	100.00	100.03	100.02	100.05	100.06	100.06	100.07	100.08	100.08	100.08	100.08	
	D3	28.18	99.99	100.02	100.01	100.04	100.05	100.05	100.06	100.06	100.07	100.07	100.07	
	D4	28.23	99.99	100.01	100.01	100.04	100.05	100.06	100.06	100.07	100.08	100.08	100.08	
	D5	28.17	100.01	100.03	100.04	100.06	100.07	100.08	100.09	100.08	100.08	100.09	100.09	
	D6	28.30	99.98	100.01	100.02	100.04	100.06	100.07	100.07	100.07	100.08	100.09	100.09	
	D7	28.21	100.00	100.03	100.04	100.05	100.06	100.07	100.08	100.09	100.09	100.09	100.10	
	D8	28.28	99.98	100.01	100.02	100.03	100.04	100.06	100.07	100.07	100.07	100.07	100.09	100.08
	D9	28.22	100.01	100.03	100.04	100.06	100.07	100.07	100.08	100.09	100.09	100.09	100.12	100.10
	D10	28.15	100.01	100.03	100.03	100.05	100.06	100.06	100.07	100.07	100.07	100.08	100.08	100.08
	D11	28.12	100.01	100.03	100.03	100.05	100.06	100.06	100.07	100.07	100.08	100.08	100.08	100.08
	D12	28.16	100.02	100.04	100.05	100.06	100.07	100.08	100.09	100.09	100.09	100.10	100.10	100.10

This report is LUMILEDS CONFIDENTIAL

Test Condition 3 105 °C 0.070 A



TABLE 4.4 - FORWARD VOLTAGE MAINTENANCE RESULTS L150-40705030000S0

Test Condition 3 105 °C 0.070 A

Load board ID	Device number	Zero hour measurements	Vf (V)	Photometric test drive current: 0.070 A												
				Photometric test ambient temperature: 25 ± 2 °C												
				Failures observed: none												
				Forward Voltage Maintenance (%)												
				12000	13000	14000	15000	16000	17000							
020000107325031C	D1	28.18	100.11	100.14	100.14	100.14	100.15	100.16								
	D2	28.19	100.10	100.12	100.13	100.13	100.14	100.14								
	D3	28.20	100.08	100.10	100.10	100.11	100.11	100.13								
	D4	28.20	100.09	100.10	100.11	100.11	100.12	100.13								
	D5	28.19	100.08	100.10	100.10	100.11	100.11	100.12								
	D6	28.17	100.10	100.12	100.12	100.13	100.14	100.15								
	D7	28.19	100.09	100.10	100.11	100.11	100.11	100.12								
	D8	28.18	100.08	100.09	100.10	100.10	100.10	100.11								
	D9	28.28	100.09	100.11	100.12	100.13	100.14	100.15								
	D10	28.29	100.07	100.09	100.10	100.11	100.12	100.12								
	D11	28.27	100.06	100.07	100.09	100.09	100.08	100.10								
	D12	28.19	100.08	100.08	100.10	100.10	100.10	100.11								
C400001082AC031C	D1	28.15	100.10	100.12	100.12	100.15	100.15	100.14								
	D2	28.19	100.09	100.10	100.11	100.13	100.12	100.12								
	D3	28.18	100.07	100.09	100.09	100.10	100.10	100.10								
	D4	28.23	100.08	100.13	100.11	100.13	100.13	100.13								
	D5	28.17	100.09	100.11	100.12	100.12	100.13	100.13								
	D6	28.30	100.09	100.11	100.12	100.14	100.14	100.14								
	D7	28.21	100.12	100.12	100.12	100.13	100.14	100.14								
	D8	28.28	100.10	100.10	100.11	100.11	100.12	100.12								
	D9	28.22	100.10	100.11	100.14	100.14	100.15	100.14								
	D10	28.15	100.08	100.09	100.11	100.11	100.11	100.11								
	D11	28.12	100.08	100.09	100.10	100.11	100.11	100.12								
	D12	28.16	100.10	100.12	100.12	100.13	100.13	100.14								

This report is the property of Lumileds Sp. z o.o.

5.0 Charts:

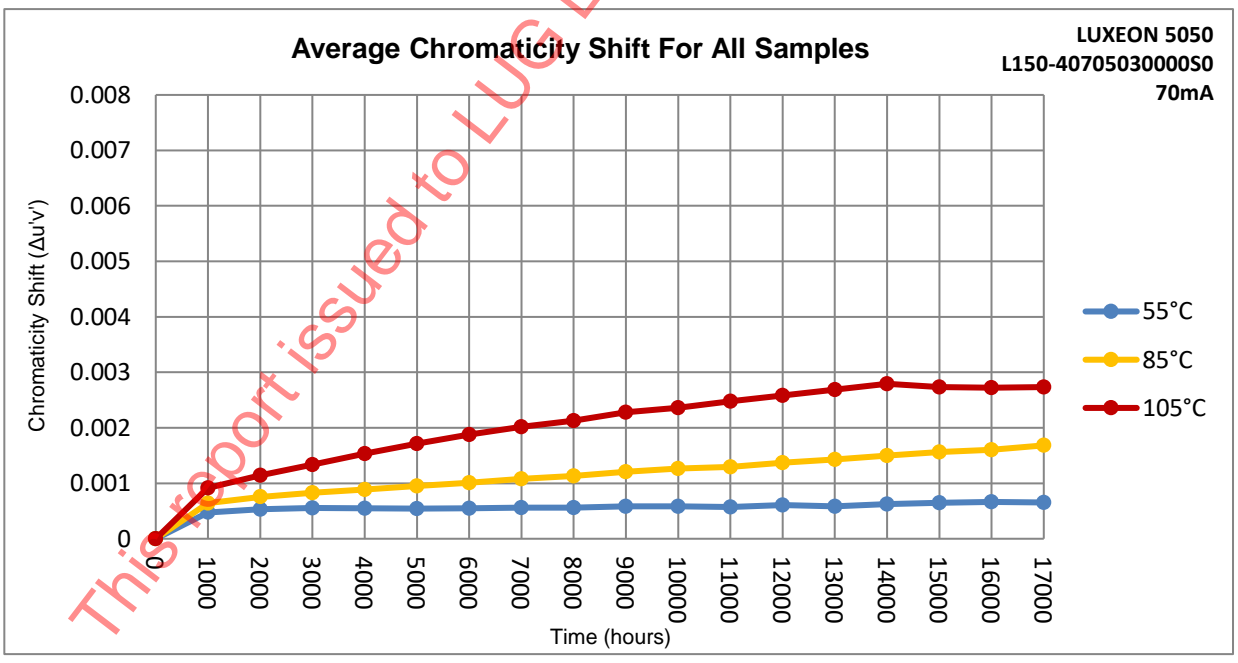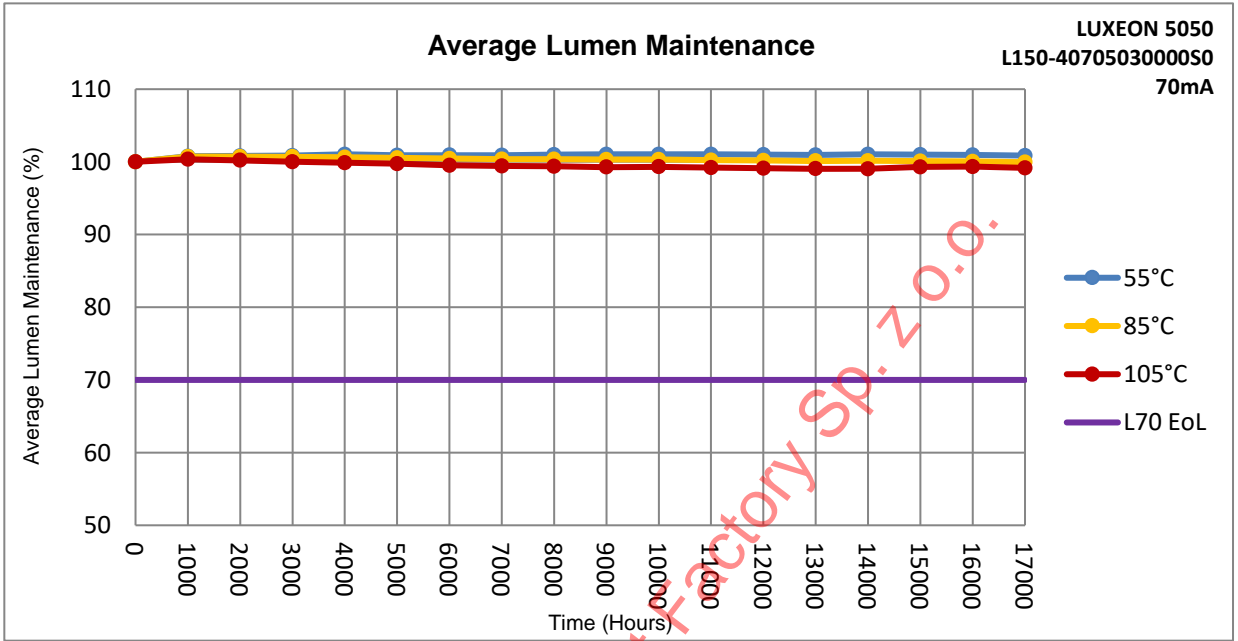

6.0 Additional Information

6.1 Auxiliary Equipment

Lifestest thermal chamber:	Orb Optronix Thermal Platform - resistive heating, liquid cooling, no forced air flow
Lifestest current source:	Orb Optronix 12-Channel Driver
Photometric test current source:	Keithley 2425
Photometric test thermal control:	Orb Optronix TEC-100
Spectrometer:	Instrument Systems, CAS 140CT
Integrating Sphere:	Gamma Scientific 20"
Photometric reference standards:	LabSphere SCL-50

6.2 Additional Test Information

6.3 Photographs



Fig. 1 LUMI012, LUXEON 5050 L150-40705030000S0 load board example.

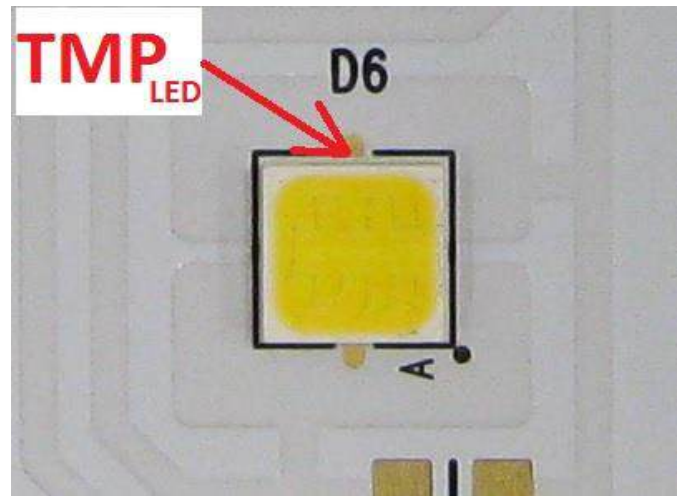


Fig. 2 LUXEON 5050 L150-40705030000S0 model LED and temperature measurement point.

6.4 Dimensional Drawing*

* all dimension in millimeters

This report issued to LUG Light Factory Sp. z o.o.

This report alone may not be used to claim product certification, approval or endorsement by NVLAP, NIST, or any agency of the Federal Government.

- END OF REPORT -