


· Für HF- und RF-Generatoren geeignet
Applicable for HF- and RF-generators

· Hochwertige Isolation
Valuable insulation

· Europäischer Flachstecker / Führungsstift
European flat plug / guiding pin

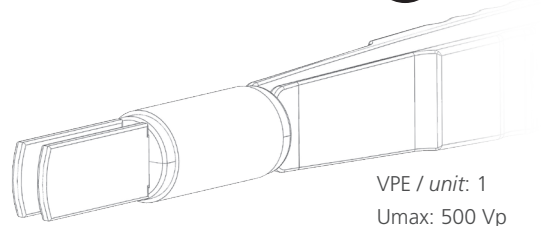

VPE / unit: 1
Umax: 500 Vp

Spitzenlänge / Tip length = L2



Gesamtlänge / Total length = L1

Spitzenbreite tip width	Nadel / Needle	0.5 mm	1.0 mm	2.0 mm	2.0 mm Karo
Artikel-Nr. item code	-	-	95038	-	-
L1	-	-	145 mm	-	-
L2	-	-	8 mm	-	-
Artikel-Nr. item code	95011	95170	95039	95027	-
L1	165 mm	165 mm	165 mm	165 mm	-
L2	6 mm	8 mm	8 mm	8 mm	-
Artikel-Nr. item code	95181	95171	95180	95178	-
L1	180 mm	180 mm	180 mm	180 mm	-
L2	6 mm	8 mm	8 mm	8 mm	-
Artikel-Nr. item code	95112	95037	95040	95029	95057
L1	195 mm	195 mm	195 mm	195 mm	195 mm
L2	8 mm	8 mm	8 mm	8 mm	8 mm
Artikel-Nr. item code	95113	95172	95041	95030	-
L1	225 mm	225 mm	225 mm	225 mm	-
L2	8 mm	8 mm	8 mm	8 mm	-
Artikel-Nr. item code	-	-	-	95207	-
L1	-	-	-	260 mm	-
L2	-	-	-	8 mm	-