

CERTIFICAT
privind lipsa sau existența restanțelor față de bugetul public național

Nr.
№ A1910739

din
от 12.03.2019

1. Destinatar / Получатель

ACHIZITII PUBLICE

2. Date despre contribuabil / Информация о налогоплательщике

Denumirea Наименование	Codul fiscal / Numărul de identificare Фискальный код / Идентификационный номер
AV-MACROCOM S.R.L.	1003600030375
Adresa sediului de bază (strada, numărul) Адрес основного месторасположения (улица, номер)	Codul - Denumirea localității Код - Наименование населенного пункта
Dacia bd. nr.30 bl.1 of.2	0110-SEC.BOTANICA

3. Atestarea lipsei sau existenței restanțelor conform datelor Sistemului Informațional Automatizat /
Подтверждение отсутствия или наличия недоимки согласно данных Автоматизированной Информационной Системы

La data emiterii prezentului certificat restanța la bugetul public național constituie/ На дату выдачи данной справки недоимка перед национальным публичным бюджетом составляет:
0,00 lei/лей.

4. Valabil pînă la / Действителен до 27.03.2019

5. Autentificarea organului fiscal / Подтверждение налогового органа



Scrisătură/Подпись

A. PROHNITCHI
Numele și prenumele/Фамилия и имя



Certificate of Registration

This certifies that the Quality Management System of

Super Micro Computer, Inc

980 Rock Avenue
San Jose, California, 95131, United States

has been assessed by NSF-ISR and found to be in conformance to the following standard(s):

ISO 9001:2008

Scope of Registration:

Design, Development, Production, Distribution and Service of computing solutions and data storage equipment/systems for commercial and industrial applications



Certificate Number: C0246067-IS4
Certificate Issue Date: 24-SEP-2015
Registration Date: 24-AUG-2015
Expiration Date *: 23-AUG-2018

NSF International Strategic Registrations

789 North Dixboro Road, Ann Arbor, Michigan 48105 | (888) NSF-9000 | www.nsf-isr.org


Carl Blazik,
Director, Technical
Operations & Business Units,
NSF-ISR, Ltd.

Authorized Registration and/or Accreditation Marks. This certificate is property of NSF-ISR and must be returned upon request.
* Company is audited for conformance at regular intervals. To verify registrations call (888) NSF-9000 or visit our web site at www.nsf-isr.org





Certificate of Registration

This certifies that the Quality Management System of

Super Micro Computer, Inc

980 Rock Avenue
San Jose, California, 95131, United States

has been assessed by NSF-ISR and found to be in conformance to the following standard(s):

ISO 13485:2003

Scope of Registration:

Design, Development, Production, Distribution and Service of computing solutions and data storage equipment/systems for the medical industry.

Certificate Number: C0246067-MD4
Certificate Issue Date: 24-SEP-2015
Registration Date: 24-AUG-2015
Expiration Date *: 23-AUG-2018



NSF International Strategic Registrations

789 North Dixboro Road, Ann Arbor, Michigan 48105 | (888) NSF-9000 | www.nsf-isr.org


Carl Blazik,
Director, Technical
Operations & Business Units,
NSF-ISR, Ltd.





Certificate of Registration

This certifies that the Environmental Management System of

Super Micro Computer, Inc

980 Rock Avenue
San Jose, California, 95131, United States

has been assessed by NSF-ISR and found to be in conformance to the following standard(s):

ISO 14001:2015

Scope of Registration:

Research, Development, Production, Sales, Logistics, Service and Support of Application Optimized Server Building Block Solutions®, Rackmount Servers, Blade Server Systems, Storage and Networking Products, Workstations, IOT and Embedded, Server Management Software, Rack Systems Integration and Related Components for Information Technology Solutions.

Certificate Number: C0246067-EM9
Certificate Issue Date: 05-JUL-2017
Registration Date: 22-MAR-2017
Expiration Date *: 21-MAR-2020


Carl Blazik,
Director, Technical
Operations & Business Units,
NSF-ISR, Ltd.



NSF International Strategic Registrations

789 North Dixboro Road, Ann Arbor, Michigan 48105 | (888) NSF-9000 | www.nsf-isr.org





Contact Us :: Search :: MySupermicro ::

Search

About Us

Products

Solutions

Support

Newsroom

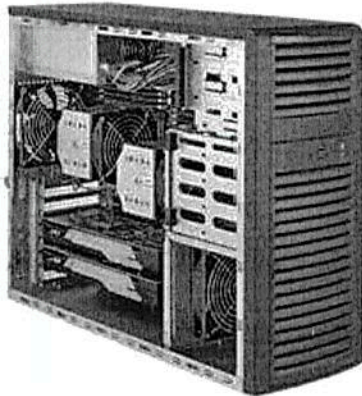
Where To Buy

English

Support Downloads Online Support Onsite Services Manual QRG RMA Warranty

Super Workstation 7039A-i

Products ▶ Systems ▶ Mid-Tower ▶ [7039A-i]

Views: | [Angled View](#) | [Side View](#) |
| [Front View](#) | [Rear View](#) |

▶ [Drivers & Utilities](#) ▶ [BIOS](#) ▶ [IPMI](#) ▶ [Tested Memory](#)
▶ [Tested M.2 List](#) ▶ [NVMe Options](#) ▶ [Manuals](#) ▶ [OS Certification Matrix](#)
▶ [Compatible GPU List](#) ▶ [Quick-References Guide](#) ▶ [Drive Options](#)

Key Features

• Whisper Quiet Workstation

1. Dual Socket P (LGA 3647) support Intel® Xeon® Scalable Processors
2. Up to 2TB 3DS ECC LRDIMM, up to DDR4-2666MHz; 16 DIMM slots
3. 4 PCI-E 3.0 x16, 2 PCI-E 3.0 x8 slots, **M.2 Interface:** PCI-E 3.0 x4
M.2 Form Factor: 2260, 2280, 22110
M.2 Key: M-Key, 2 PCI-E 3.0 NVMe x4 Internal Port(s)
4. 2x 1GbE LAN ports
5. 7.1 HD Audio
6. 4 Internal fixed 3.5" drive bays, 2 5.25" peripheral drive bays
7. 1 M.2 slot, 2 NVMe support with optional cables
8. 1200W High-efficiency Power Supply **Platinum Level Certified**

Note: Image above may show a varied configuration or optional parts. Please refer to parts list for standard parts included.

Specifications

Product SKUs

SuperWorkstation ■ SYS-7039A-i (Black)

Motherboard

Super X11DAi-N

Processor/Cache

CPU	■ Dual Socket P (LGA 3647)
	■ Intel® Xeon® Scalable Processors , Dual UPI up to 10.4GT/s
	■ Support CPU TDP 70-205W
Cores	■ Up to 28 Cores with Intel® HT Technology
GPU Support	■ Please refer to: Compatible GPU list

System Memory

Memory Capacity	■ 16 DIMM slots
	■ Up to 2TB 3DS ECC L/RDIMM, up to DDR4-2666MHz
Memory Type	■ 2666/2400/2133MHz ECC DDR4 RDIMM/LRDIMM
DIMM Sizes	■ RDIMM: 64GB
	■ LRDIMM: 64GB
	■ 3DS LRDIMM: 128GB
Memory Voltage	■ 1.2V
Error Detection	■ Corrects single-bit errors
	■ Detects double-bit errors (using ECC memory)

On-Board Devices

Chipset Intel® C621 chipset

Chassis

Form Factor	■ Mid-Tower
Model	■ CSE-732D3-1200B

Dimensions and Weight

Height	■ 16.7" (424mm)
Width	■ 7.6" (193mm)
Depth	■ 20.68" (525.3mm)
Gross Weight	■ 40 lbs (18.1 kg)
Available Colors	■ Black

Front Panel

Buttons	■ Power On/Off button
	■ Power LED
LEDs	■ Hard drive activity LED
	■ Network activity LED
	■ System Information LED
Ports	■ 2 front USB 3.0 Ports
	■ 2 front HD/AC97 Audio Ports

Expansion Slots

PCI-Express	■ 4 PCI-E 3.0 x16 slots
	■ 2 PCI-E 3.0 x8 slots
M.2	■ M.2 Interface: PCI-E 3.0 x4
	■ Form Factor: 2260, 2280, 22110
	■ Key: M-Key

Drive Bays

Internal	■ 4 Fixed 3.5" drive bays
----------	---------------------------



Controllers	
IPMI	■ ASPEED AST2500
Audio	■ RealTek ALC888 7.1 High Definition Audio with S/PDIF header
Input / Output	
SATA	■ 10 SATA3 (6Gbps) ports
NVMe	■ 2 NVMe support with optional cables
LAN	■ 2 RJ45 Gigabit Ethernet LAN ports
USB	■ 6 USB 3.0 ports (4 rear, 2 front) ■ 2 USB 3.1 ports (rear)
Audio	■ 7.1 HD Audio with optical S/PDIF
Video	■ 1 VGA port
Serial Port / Header	■ 1 COM port (header)
DOM	■ 2 SuperDOM (Disk on Module) ports
TPM	■ 1 TPM 2.0 Header
System BIOS	
BIOS Type	■ UEFI 128M
Management	
Software	■ Intel® Node Manager
	■ IPMI 2.0
	■ SSM, SPM, SUM
	■ SuperDoctor® 5
	■ Watchdog
PC Health Monitoring	
CPU	■ Monitors for CPU Cores, Chipset Voltages, Memory. ■ 4+1 Phase-switching voltage regulator
FAN	■ Fans with tachometer monitoring ■ Status monitor for speed control ■ Pulse Width Modulated (PWM) fan connectors
Temperature	■ Monitoring for CPU and chassis environment ■ Thermal Control for fan connectors

Bay	■ 4x 2.5" fixed drive bays (optional)
System Cooling	
Fans	■ 1x 12cm rear exhaust fan ■ 1x 12cm front cooling fan ■ Optimized cooling technology for Whisper-Quiet Operation
Power Supply	
1200W high-efficiency power supply w/ PMBus	
AC Input	■ 1000W: 100-114.9 V, 50-60 Hz, 12 Amp ■ 1200W: 114.9-240 V, 50-60 Hz, 12-8 Amp
DC Output	■ +3.3V / +5V / +12V / -12V / +5VSB
1000W max	■ 20A / 20A / 83A / 0.3A / 3A
1200W max	■ 20A / 20A / 99A / 0.3A / 3A
Note:	■ Max. continuous combined load on +3.3V and +5V output shall not exceed 120W.
Certification	  Platinum Certified
Operating Environment / Compliance	
RoHS	■ RoHS Compliant
Environmental Spec.	■ Operating Temperature: 10°C to 35°C (50°F to 95°F)
	■ Non-operating Temperature: -40°C to 70°C (-40°F to 158°F)
	■ Operating Relative Humidity: 8% to 90% (non-condensing)
	■ Non-operating Relative Humidity: 5% to 95% (non-condensing)

Parts List

[See Parts List](#)

Terms & Conditions | Privacy | Investor Relations | Jobs | Site Map
 SuperServer® | Motherboard | Chassis | Rack Cabinet | SuperBlade® | Embedded | Networking | Storage | Accessories | AMD Solution | Power Supplies

Information in this document is subject to change without notice.

Other products and companies referred to herein are trademarks or registered trademarks of their respective companies.

Copyright © 2019 Supernano Computer Corp.

