



27005AA

HOPKINS® Straight Forward Telescope 0°, enlarged view, diameter 4 mm, length 30 cm, **autoclavable**, fiber optic light transmission incorporated, color code: green




27005FA

HOPKINS® Telescope 12°, enlarged view, diameter 4 mm, length 30 cm, **autoclavable**, fiber optic light transmission incorporated, color code: black




27005BA

HOPKINS® Forward-Oblique Telescope 30°, enlarged view, diameter 4 mm, length 30 cm, **autoclavable**, fiber optic light transmission incorporated, color code: red



27005CA

HOPKINS® Lateral Telescope 70°, enlarged view, diameter 4 mm, length 30 cm, **autoclavable**, fiber optic light transmission incorporated, color code: yellow




27005EA

HOPKINS® Retrospective Telescope 120°, enlarged view, diameter 4 mm, length 30 cm, **autoclavable**, fiber optic light transmission incorporated, color code: white

Working Elements, unipolar


for one-stem electrodes with stabilizers

For use with HOPKINS® Forward-Oblique Telescopes
27005BA, 27005BIA, 27005FA and 27005FIA



Cutting by means of a spring. Movable thumb ring

In rest position the electrode is inside the sheath

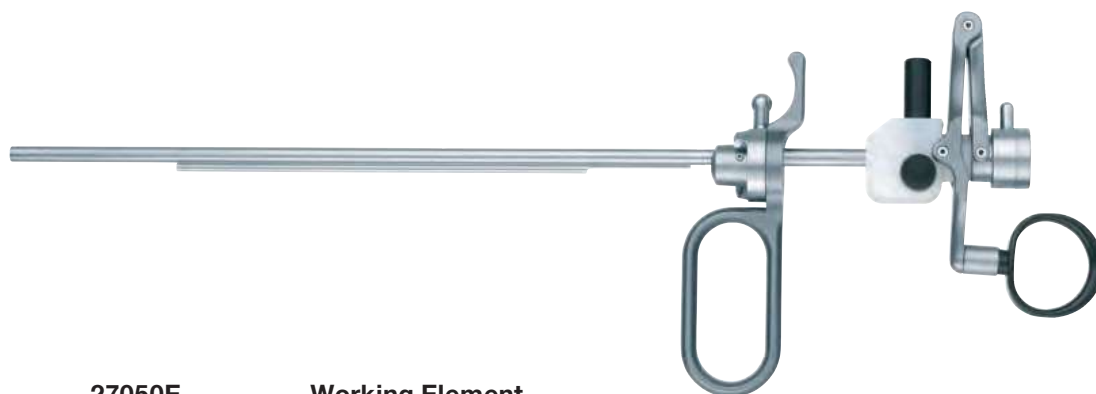


27050E

Working Element
(also for use with optical
urethrotomes)

Cutting by means of a finger grip. Movable thumb ring

In rest position the electrode is outside the sheath.

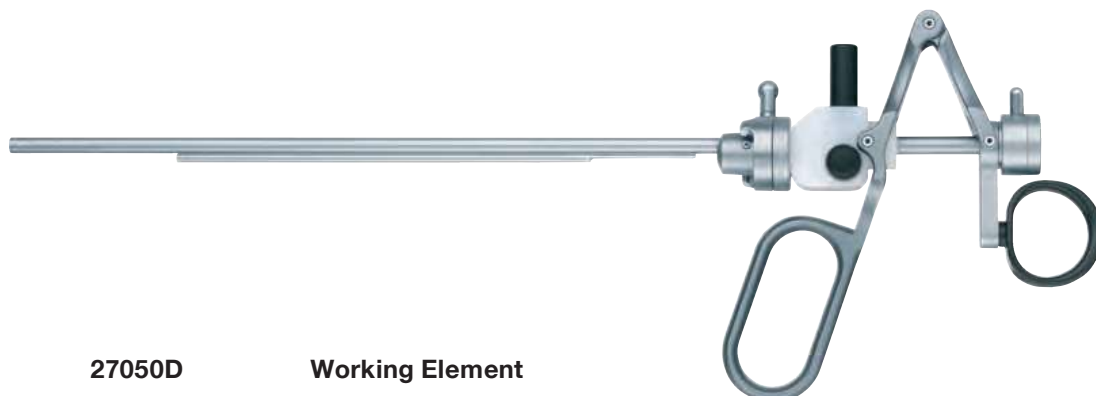

27050D

Working Element

Fiber Optic Light Cables

for Cold Light Fountains



Fiber Optic Light Cable with Straight Connector

495 NE	Fiber Optic Light Cable , diameter 4.8 mm, length 300 cm
495 NCS	Fiber Optic Light Cable , extremely heat-resistant, diameter 4.8 mm, length 250 cm
NEW 495 NCSC	Fiber Optic Light Cable , extremely heat-resistant, with safety locking device, diameter 4.8 mm, length 250 cm
495 NB	Fiber Optic Light Cable , diameter 4.8 mm, length 180 cm
495 ND	Fiber Optic Light Cable , diameter 3.5 mm, length 300 cm
495 NA	Fiber Optic Light Cable , diameter 3.5 mm, length 230 cm
NEW 495 NAC	Fiber Optic Light Cable , with safety locking device, diameter 3.5 mm, length 230 cm
495 NL	Fiber Optic Light Cable , diameter 3.5 mm, length 180 cm
495 NTA	Fiber Optic Light Cable , diameter 2.5 mm, length 230 cm
495 NT	Fiber Optic Light Cable , diameter 2.5 mm, length 180 cm
NEW 495 TIP	Fiber Optic Light Cable , highly heat resistant, diameter 4.8 mm, length 300 cm, optimized for 3D TIPCAM®1 and TIPCAM®



Fiber Optic Light Cable with 90° Deflection to the Light Source

495 NWL	Fiber Optic Light Cable , with 90° deflection to the cold light fountain on the fountain side, diameter 3.5 mm, length 300 cm
495 NWM	Fiber Optic Light Cable , with 90° deflection to the cold light fountain on the fountain side, diameter 3.5 mm, length 230 cm
495 NW	Fiber Optic Light Cable , with 90° deflection to the cold light fountain on the fountain side, diameter 3.5 mm, length 180 cm
495 NTX	Fiber Optic Light Cable , with 90° deflection to the cold light fountain on the fountain side, diameter 2.5 mm, length 230 cm
495 NTW	Fiber Optic Light Cable , with 90° deflection to the cold light fountain on the fountain side, diameter 2.5 mm, length 180 cm



495 NVC



495 NV/NVL/NVB

Fiber Optic Light Cable with 90° Deflection to the Instrument

NEW 495 NVC	Fiber Optic Light Cable , with 90° deflection to the instrument, very narrow radius of curvature, diameter 4.8 mm, length 300 cm
495 NVB	Fiber Optic Light Cable , with 90° deflection to the instrument, diameter 4.8 mm, length 300 cm
495 NVL	Fiber Optic Light Cable , with 90° deflection to the instrument, diameter 3.5 mm, length 300 cm
495 NV	Fiber Optic Light Cable , with 90° deflection to the instrument, diameter 3.5 mm, length 230 cm




Light Adaptor, angled 90°

495 EW	Light Adaptor , angled 90°, diameter 4.8 mm, free rotatable, to connect with standard telescopes
--------	---


Adaptor for connecting KARL STORZ fiber optic light cables with endoscopes and light sources from other manufacturers, see page TP 132

Standard Instruments for Enucleation

HOPKINS® Telescopes



- 27005 BA **HOPKINS® Forward-Oblique Telescope 30°**, enlarged view, diameter 4 mm, length 30 cm, **autoclavable**, fiber optic light transmission incorporated, color code: red



- 27005 FA **HOPKINS® Telescope 12°**, enlarged view, diameter 4 mm, length 30 cm, **autoclavable**, fiber optic light transmission incorporated, color code: black

Resectoscope Sheaths



- 27050 SCK **Resectoscope Sheath**, quick-release lock, including connecting tube for in- and outflow, 26 Fr., oblique beak, rotating inner sheath with ceramic insulation, color code: yellow

- 27050 SLK **Resectoscope Sheath**, including connecting tube for in- and outflow, 26 Fr., oblique beak, rotating inner sheath with ceramic insulation, color code: yellow

Obturator




- 27040 OC **Standard Obturator**, for 24/26 Fr. sheaths


- 27050 BK SCHMIEDT **Visual Obturator**, for 24/26 Fr. sheaths, 27040 BK/BO/SD/SL, 27240 BO, 27241 BK/BO, 27042 B, 27242 BZ, 27050 SL

Standard Instruments for Enucleation

HOPKINS® Telescopes



- 27005BA **HOPKINS® Forward-Oblique Telescope 30°**, enlarged view, diameter 4 mm, length 30 cm, **autoclavable**, fiber optic light transmission incorporated, color code: red



- 27005FA **HOPKINS® Telescope 12°**, enlarged view, diameter 4 mm, length 30 cm, **autoclavable**, fiber optic light transmission incorporated, color code: black

Resectoscope Sheaths



- 27050SCK **Resectoscope Sheath**, quick-release lock, including connecting tube for in- and outflow, 26 Fr., oblique beak, rotating inner sheath with ceramic insulation, color code: yellow
- 27050SLK **Resectoscope Sheath**, including connecting tube for in- and outflow, 26 Fr., oblique beak, rotating inner sheath with ceramic insulation, color code: yellow

Obturator



- 27040OC **Standard Obturator**, for 24/26 Fr. sheaths
- 27050BK SCHMIEDT **Visual Obturator**, for 24/26 Fr. sheaths, 27040BK/BO/SD/SL, 27240BO, 27241BK/BO, 27042B, 27242BZ, 27050SL

[Home page](#) › Online Catalog - Human Medicine



Item no: 26005M

Unipolar High Frequency Cord, 300 cm

Quantity:

–

1



+

On the offer list 

Technical details	Documents & Films	Product group / field of application
-------------------	-------------------	--------------------------------------

Number of poles	Unipolar
Connection on the unit side	KARL STORZ / Erbe plug, diameter 5 mm
Length	300 cm
RFID coding system	No
Connection on the instrument side	For CLICKLINE instruments LAP, diameter 4 mm

26050N

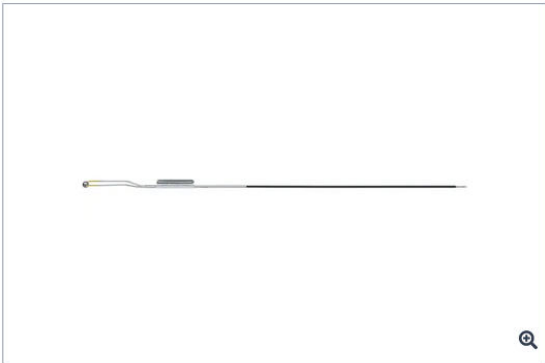

Item no: 26050NK

Coagulating Electrode, 26 Fr.

Quantity:

–

1

+

On the offer list


Technical details	Documents & Films	Product group / field of application
-------------------	-------------------	--------------------------------------

Number of poles	Unipolar
Diameter distal end	5.0 mm
Shape of distal end	Ball end
For telescope direction of view	12°
Type of usage	Reusable
Color code	Yellow
System size	26 Fr.
Packaging unit	6 pc.



Electrodes

One-Stem Electrodes with Stabilizers, for Working Elements 27050 C/D/E

For use with 24 – 28 Fr. resectoscope sheaths



The cutting loops are delivered with a wire diameter of 0.35 mm.

Distal Tip	24/26 Fr. color code: yellow	27/28 Fr. color code: brown	Instrument Description
	<u>27050 G</u>	27050 F	Cutting Loop , angled
	27050 GS	–	THOMAS Cutting Loop , angled, small
	27050 J	–	Cutting Loop , longitudinal
	<u>27050 L</u>	27050 K	Coagulation Electrode , pointed
	27050 S	–	Coagulation Electrode , conical
	27050 N	27050 M	Coagulation Electrode , ball-shaped, diameter 3 mm
	<u>27050 NK</u>	27050 MK	Coagulation Electrode , ball-shaped, diameter 5 mm
	27050 NX	–	Coagulation Electrode , barrel-shaped, diameter 3 mm
	27050 NW	27050 MW	Coagulation Electrode , barrel-shaped, diameter 5 mm
	27050 GR	–	LOZZI Needle Electrode

Note: Electrodes, in sterile packaging, are also available for single use. Please contact:



High Frequency Cords see page 73

High Frequency Surgical Units see chapter 15, UNITS