


PROTECT 800

SPECIFICATIONS



Designed for continuous air disinfection and odour control in medium indoor spaces, the Novaerus Protect 800 uses patented filter-free ultra-low energy plasma technology with a 2-speed fan.

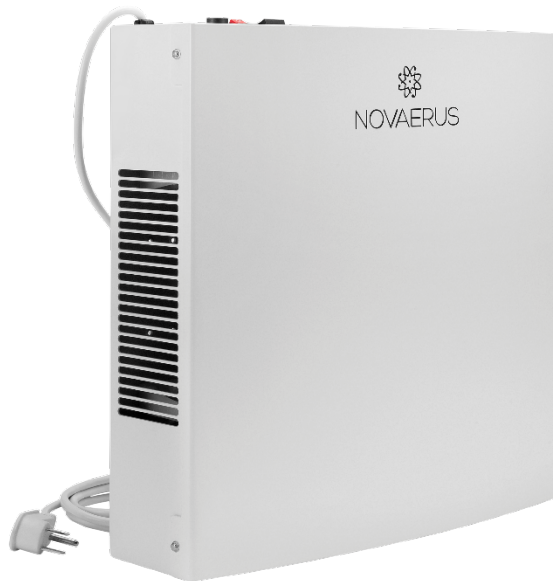

MODEL

NV800

Placed on a stand or wall mounted

Supplied with 2m power cord

ELECTRICAL RATING

230 VAC, 50 Hz, 20 W

Fuse Rated at 250 VAC, 3 Amps, Listed

POWER CONSUMPTION

20 W

CONSTRUCTION + COLOR

Precision-cut fabricated metal casing in a white anti-bacterial powder coat finish

DIMENSIONS + WEIGHT

36.5 cm(h) × 36.5 cm(w) × 11.5 cm(d)

4.5kg

ELECTRICAL CONNECTION

Switched and fused with a grounded, moulded power cord

FAN AIR FLOW VOLUME

Speed I = 220 m³/hr

Speed II = 260 m³/hr

NOISE LEVEL

Speed I = 40 dB

Speed II = 45 dB

OPERATING CONDITIONS

10-35°C, 10-75% Relative Humidity, 2000m

SHIPPING / STORAGE CONDITIONS

5°C-50°C, Maximum 95% Relative Humidity

QUALITY + SAFETY

Manufactured under ISO 9001, ISO 14001 & OHSAS 18001

Conforms to the Medical Device Directive