

# O'Pro +

WIDE RANGE WITH O'PRO PROTECTION TECHNOLOGY  
FOR +50% TANK LIFETIME



## + PRODUCT

### COMFORT

- Control knob on the bottom of the tank
- Flat chromed thermometer
- Wide range of capacities and models to fit all interior requirements

### QUALITY - DURABILITY

- Long tank lifetime thanks to O'Pro exclusive anti-corrosive system
- Magnesium anode for strengthened tank protection
- New generation diamond-quality enamel (glass-lined inner tank)
- Pressure relief valve
- Dielectric union
- Specific lip gasket to avoid corrosion around flange

### USER-FRIENDLINESS

- IP 24 - full compliance with European standards for electrical safety and user protection
- Plug\*
- Heating light indicator

### SAVINGS

- High-efficiency water inlet
- CFC-free high-density insulation for more energy savings

## ELECTRIC WATER HEATER

30 TO 120 L  
(VERTICAL WALL-MOUNTED)

50 TO 100 L  
(HORIZONTAL WALL-MOUNTED)



Model available\*\*




Bottom control knob



More hot water



Tank protection



Copper heating element

# O'Pro +




- 1 External thermometer
- 2 Diamond-quality enamel (glass-lined inner tank)
- 3 Optimised stainless outlet pipe
- 4 Magnesium anode
- 5 Sheathed immersion heating element
- 6 Inlet diffuser
- 7 Thermostat
- 8 High-density polyurethane foam 0% CFC
- 9 O'Pro anti-corrosive system
- 10 Bottom control knob
- 11 Dielectric union


O'Pro exclusive anti-corrosive system balances out the electrical potential of the tank and immersion heating element. Thus, the magnesium anode life is considerably increased and protection against corrosion is reinforced.

## INSTALLATION DIMENSIONS

Vertical wall-mounted

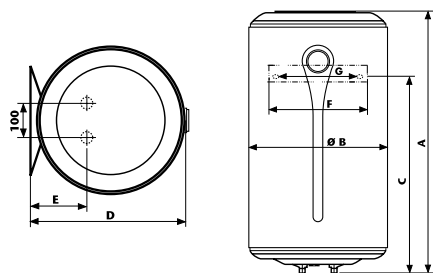

Horizontal wall-mounted

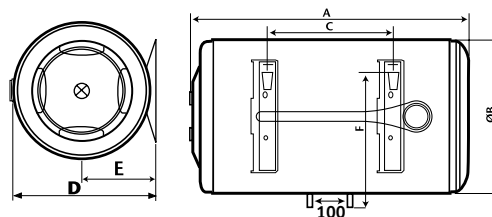

## TECHNICAL DATA

CAPACITY (L)	OUTPUT (W)	VOLTAGE (V)	ENERGY CONSUMPTION (kWh/24 h AT 65°C)	HEAT-UP TIME AT 60°C (ΔT=50°C)
<b>O'Pro+ Vertical wall-mounted</b>				
30	1200	230 (220/240)	0.63	1h19
50	2000 <sup>(1)</sup>	230 (220/240)	0.95	1h25
80	2000 <sup>(1)</sup>	230 (220/240)	1.40	2h34
100	2000 <sup>(1)</sup>	230 (220/240)	1.85	3h05
120	2000 <sup>(1)</sup>	230 (220/240)	2.15	3h54
<b>O'Pro+ Horizontal wall-mounted</b>				
50	1500	230 (220/240)	1.15	1h48
80	1500	230 (220/240)	1.55	2h53
100	1500	230 (220/240)	1.95	3h58

## DIMENSIONS

CAPACITY (L)	DIMENSIONS (mm)							FLANGE OPENING (Ø) mm	NET WEIGHT (kg)	ERP ENERGY CLASS	PROFILE
	A	B	C	D	E	F	G				
<b>O'Pro+ Vertical wall-mounted</b>											
30	448	433	248	451	158	300	239	72	11.5	C	S
50	612	433	382	451	158	300	239	72	15	C	M
80	859	433	592	451	158	300	239	72	21	C	L
100	1021	433	742	451	158	300	239	72	24	C	L
120	1184	433	917	451	158	300	239	72	29	C	L
<b>O'Pro+ Horizontal wall-mounted</b>											
50	596	433	198	451	228	346	-	72	15	C	M
80	843	433	349	451	228	346	-	72	21	C	M
100	1005	433	497	451	228	346	-	72	24	C	L

(1) Depending on models