

Navicross®

Support Catheter



Your first choice in peripheral support catheters

Navicross® is a support catheter for peripheral indications, accepting guidewire diameters up to 0.035" / 0.89 mm.

Navicross® is intended to guide and support a guidewire during access of the vasculature except within the cerebral vasculature and the coronary arteries to allow wire exchanges and provide a conduit for the delivery of physiological heparinized saline solution or radiopaque media.

Product Characteristics

Stainless Steel Double Braided Shaft:


- Provides excellent steerability and efficient push transition in complex lesions;
- Enhances torqueability and prevents kinking.

Minimal Crossing Profile and Tapered Tip:

- Guarantees a seamless transition between guidewire and catheter facilitating successful lesion access and crossing;
- Angulated tip can be used for selecting the true lumen and navigating through bifurcated vessels.

Unique Three Radiopaque Shaft-Markers:

- Feasibility of accurate intraluminal measurement (e.g. assessment of treatment dimensions/positions of balloons and stents), because embedded shaft markers are positioned 1 mm from distal tip - 40 mm and 60 mm from precedent marker band.

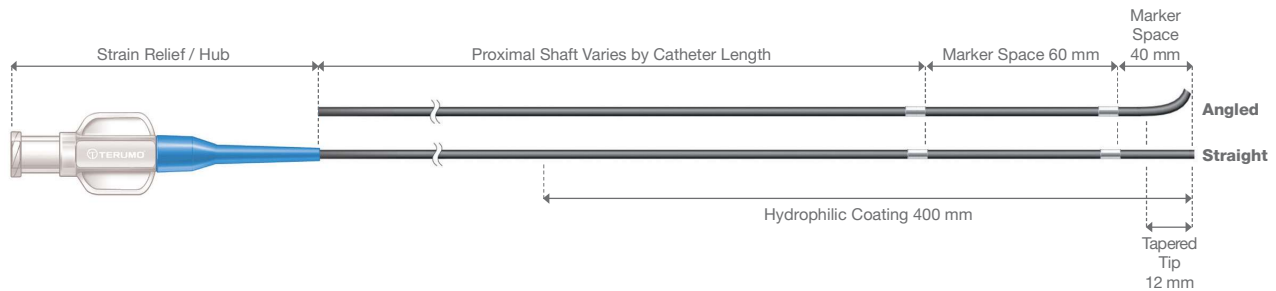

General Specifications

| | |
|----------------------|--|
| Shaft | Stainless steel, Double braided |
| Catheter length | 65, 90, 135 and 150 cm |
| Wire compatibility | 0.035" / 0.89 mm |
| Markers | 1 embedded and 2 swaged radiopaque markers |
| Tip configuration | Straight and 30° angled |
| Sheath compatibility | 4 Fr (1.39 mm) |

Item Specifications

| 0.035" / 0.89 mm Wire Compatibility | 65 cm | 90 cm | 135 cm | 150 cm |
|-------------------------------------|--------------|--------------|--------------|--------------|
| Straight Tip | WS*NS350G3HM | WS*NS35093HM | WS*NS350N3HM | WS*NS35153HM |
| 30° Angled Tip | WS*NA350G3HM | WS*NA35093HM | WS*NA350N3HM | WS*NA35153HM |

Please quote above item reference codes when placing an order