

VOLTANA EVO 1

5270

Optic	5270
Protector	Integrated lenses
Source	8 Osram OSOLON SQUARE GIANT
Matrix	481232



Characteristics

416	170	104	2.8	IP 66	IK 10	I EU, II EU	0.013
Length (mm)	Width (mm)	Height (mm)	Weight (kg)	Tightness level*	Impact resistance*	Electrical class*	CxS (m²)

* According to IEC-EN60598 and IEC-EN62262

Features

The compact, cost-effective LED solution for your urban spaces

- Cost-effective and efficient lighting solution for a fast return on investment
- Compact design
- ProFlex™ photometric engines offering high efficiency lighting, comfort and safety
- Adjustable inclination on-site
- Side-entry and post-top (with accessory) mounting

Types of application

- Square and park
- Car park
- Bike path
- Urban road

Information for 1000 lm matrix


Efficacy (%)	90.7	G Class (EN 13201-2)	G3	I 70-80-90-95 (cd)	963 - 83 - X - X
DLOR (%)	90.7	G* (EN 13201 2015)	G*3	CIE flux code N 1→5 (%)	35.7 - 70.2 - 97.2 - 100.0 - 90.7
ULOR (%)	0.0	Imax (cd)	1024	Gradient 90°	24cd
ULR (%)	0.0	Aperture 0-180°	69 - 69	Gradient 270°	13cd
Incl ULR 4%	-41/34°	Aperture 90-270°	X - X		


Photometrical characteristics

LED count	Colour code	Current (mA)	Luminaire power (W)	Source flux (lm)	Luminaire output flux (lm)	Luminaire efficacy (lm/W)	Peak (cd)	BUG Rating	Voltage (V)
			Ambient temp = 25°						
8	NW 740	200	6	930	843	141	952	B0 U0 G0	230
8	NW 740	350	10	1552	1408	141	1589	B0 U0 G0	230
8	NW 740	500	13	2128	1930	148	2178	B0 U0 G0	230
8	NW 740	700	18	2828	2565	143	2895	B1 U0 G1	230
8	NW 740	1050	28	3858	3500	125	3950	B1 U0 G1	230
8	NW 740	1250	36	4336	3934	109	4440	B1 U0 G1	230
8	NW 740	1400	40	4644	4213	105	4754	B1 U0 G1	230
8	WW 730	200	6	819	743	124	839	B0 U0 G0	230
8	WW 730	350	10	1368	1241	124	1401	B0 U0 G0	230
8	WW 730	500	13	1876	1702	131	1920	B0 U0 G0	230
8	WW 730	700	18	2492	2261	126	2552	B1 U0 G1	230
8	WW 730	1050	28	3401	3085	110	3482	B1 U0 G1	230
8	WW 730	1250	36	3822	3468	96	3913	B1 U0 G1	230
8	WW 730	1400	40	4093	3713	93	4191	B1 U0 G1	230


Tolerance on flux +- 7% - Tolerance on power +- 5%

Hypergon view

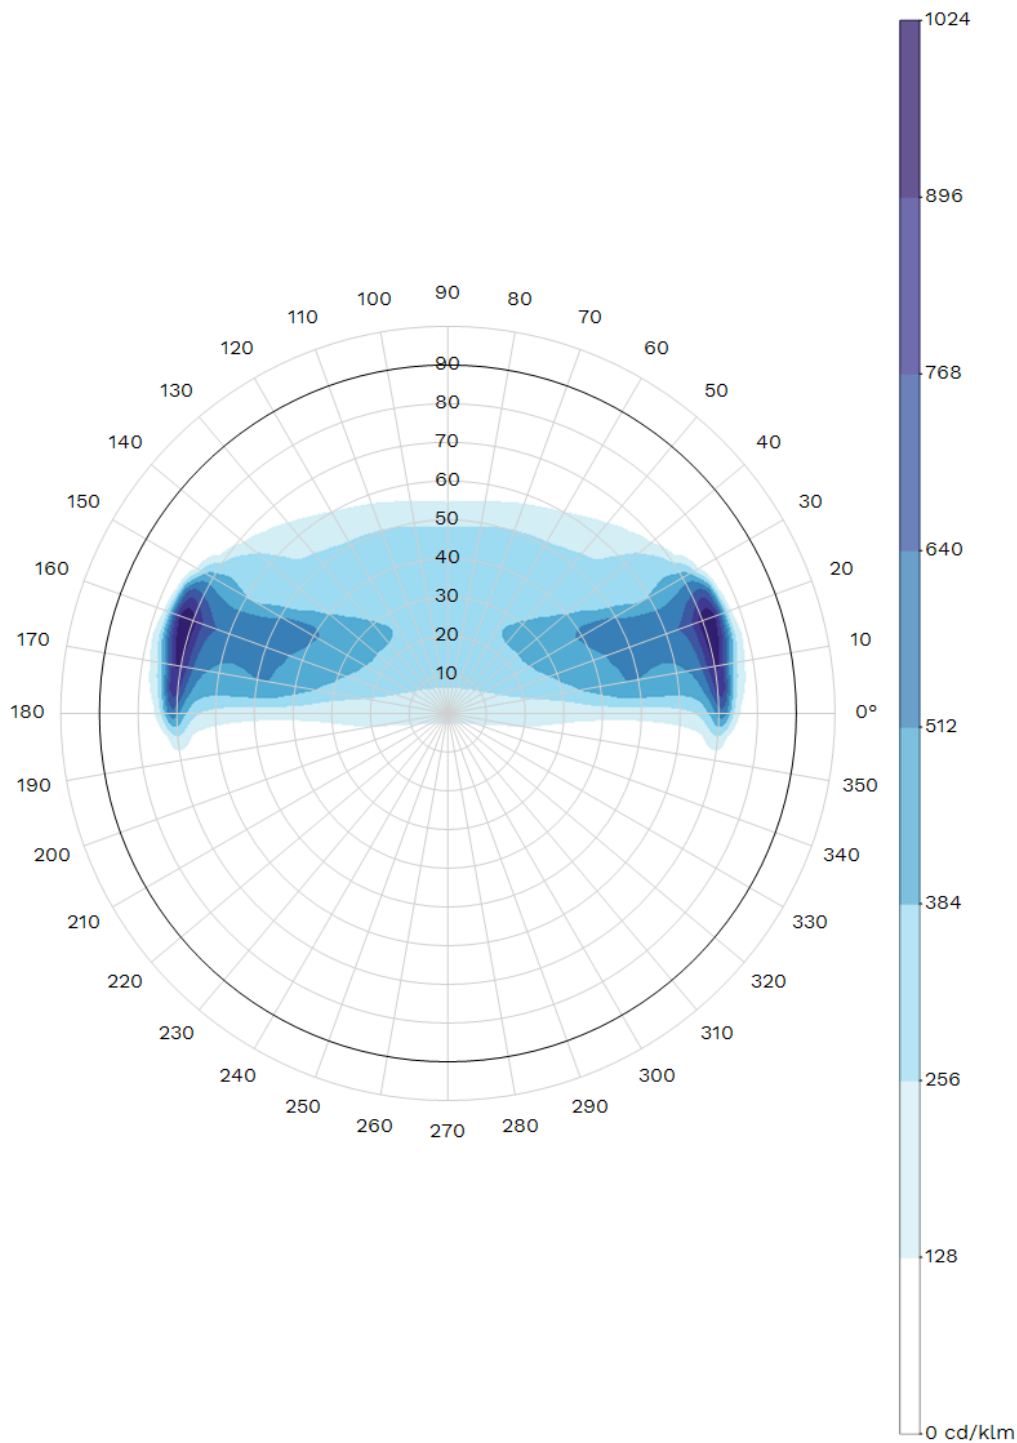


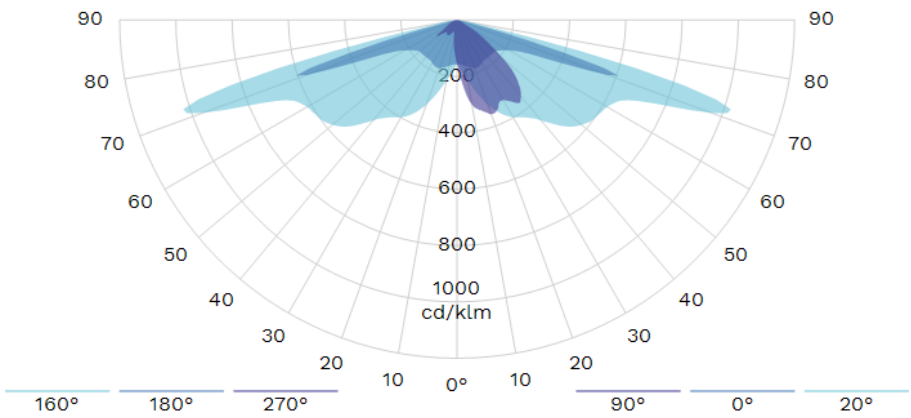


Isolux

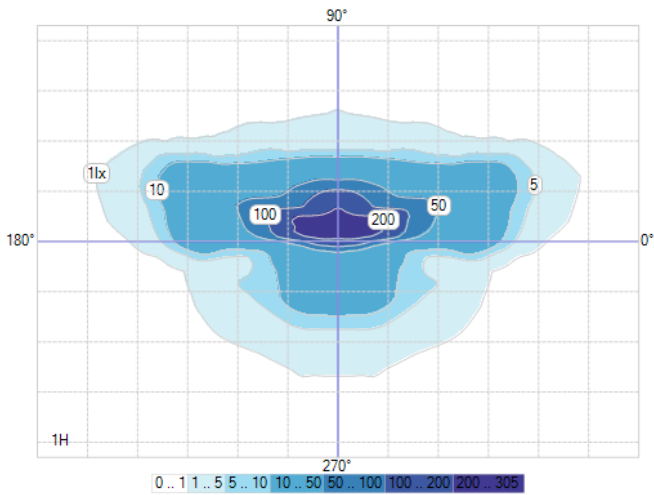

K-Curve

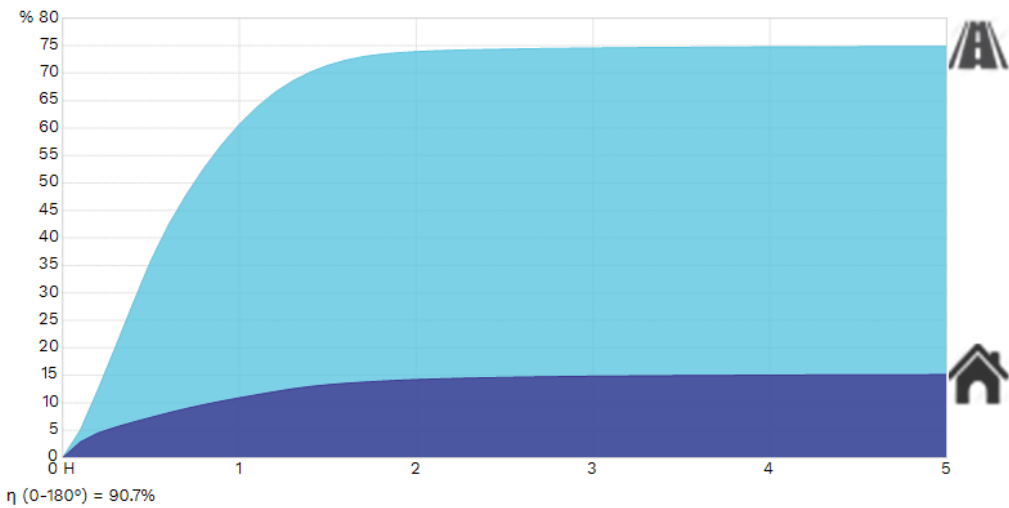


IES Roadway Classification / Nema Classification

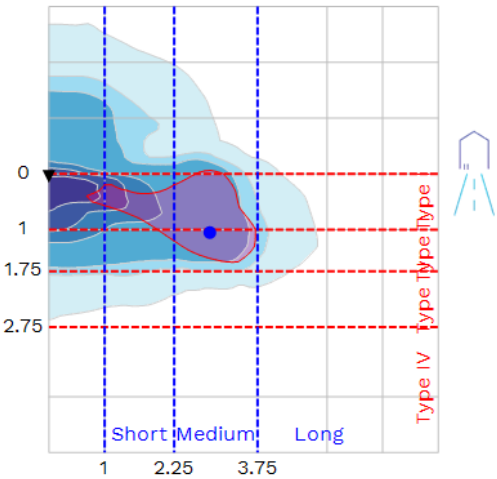


II - Medium

Luminaire classification system (LCS)

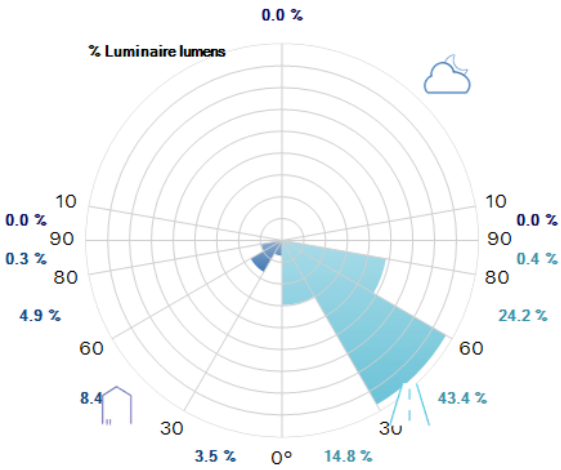

Intensity diagram in max Cone and in CPlane

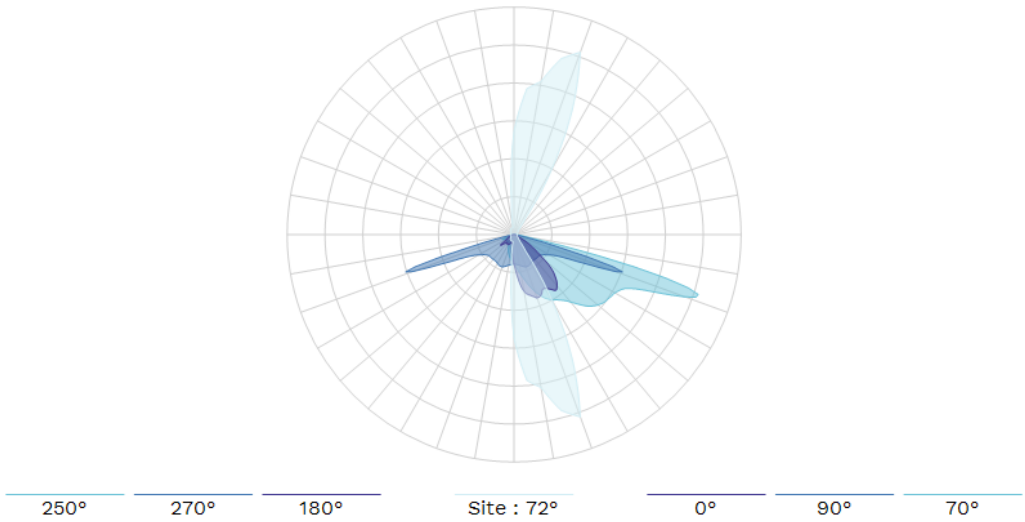

Copyright © 2022 Schröder SA. All rights reserved. Specifications are of an indicative nature and subject to change without notice.

<http://www.schreder.com>