

DECLARAȚIE
privind valabilitatea ofertei

Către_ Primăria com. Ecaterinovca

Stimați domni,

Ne angajăm să menținem oferta valabilă, **privind achiziționarea Sistem de supraveghere video IP la Primăria com. Ecaterinovca prin procedura de achiziție nr ocds-b3wdp1-MD-1644408120576** din 09 / 02 / 2022 pentru o durată de 60 zile (șaizeci zile), și ea va rămâne obligatorie pentru noi și poate fi acceptată oricând înainte de expirarea perioadei de valabilitate.

Data completării 15 02 2022

Cu stimă,

Administrator
"MEDIA SECURITY" SRL

Gaina V



IP S-SIGHT SERIES

Provision-ISR S-SIGHT series provides you with all that you need for a simple installation. S-Sight cameras guarantee a superior image quality, improved night performance and make an outstanding value for money solution.



DI-340IPS-28

20M IR 4MP FIXED LENS DOME/TURRET CAMERA

Equipped with a 2.8mm fixed lens, this 4MP Dome/Turret camera is designed for short distance surveillance (up to 20m) in both indoor and outdoor scenarios.

With its great performances, reliability and affordable price DI-340IPS-28 camera is the perfect solution for any basic installation.



4MP

Resolution



IP67

Protection
rating



3 Axis

**20m
IR**

IR View 0 Lux

**DC12V
POE**

Power supply



Audio IN



SD card



MAIN FEATURES

- 4MP
- 2592×1520 Resolution
- Wide field of view 110°
- 3D-DNR
- IP67
- Built in microphone

ANALYTICS

- General Analytics: Camera Tampering
- Standard Analytics: Line Crossing, Sterile Area




SPECIFICATIONS

Image Sensor	1/2.7" CMOS (16:9)
Effective Pixels	2560x1440
Electronic Shutter	1/25s ~ 1/1000000s
Frame Rate	1-25/30FPS
Day & Night	ICR
Min. Illumination	Day: 0.1lux / Night: 0.03lux (@F2.0, AGC On) 0lux with IR on
Audio compression	G.711A/G.711U
Communication	One-way Audio
Image Settings	AWB, AGC Adjustable, Exposure Mode (Auto) Sharpness, Saturation, Brightness & Contrast Adjustable
Image Enhancement	Digital WDR, BLC, HLC, ROI
Noise Reduction	3D-DNR
Image Orientation	Mirror/Flip
Privacy Zone	Yes
Motion Detection	Yes
Analytics	General Analytics: Camera Tampering Standard Analytics: Line Crossing, Sterile Area
Video Compression	H.265 / H.264 / MJPEG (Sub-Stream Only)
Resolution	4MP (2560x1440) / 3MP (2304x1296) / 2MP (1920x1080) / D1 / QVGA /CIF
Multi-Stream	Master Stream: 4MP (2560x1440) / 3MP (2304x1296) / 2MP (1~30fps) Sub-Stream: 1MP (1~12/15fps) /QVGA/D1/CIF (1~30fps) Third Stream: QVGA/D1/CIF (1~30fps)"
Bit rate	64Kbps ~ 5Mbps@H.265 / 64Kbps ~ 5Mbps@H.264
Encode Mode	VBR/CBR
Image Quality	Five levels under VBR; Free adjustment under CBR
IR Distance	20m (1 High Power IR LED)
Lens (Field of View)	2.8mm (110°)

SPECIFICATIONS

Iris	Fixed Iris
Lens Mount	M12 mount
Protection Rate	Water Proof: IP67
Bracket	3-Axis Bracket
Dimensions	Ø97mm×82.6mm
Weight (gross)	~450g
Network	RJ45 (+PoE)
Power	DC Socket
Analog Video Output	No
Audio Connectivity	Built-In Microphone
SD Card	Event/Schedule based Main/Sub-Stream recording (Up to 128Gb)
Hard Reset Button	Yes
Alarm	No
Remote Monitoring	IE Browsing, CMS Software, Provision Cam2 Mobile App
User Access	Supports simultaneous monitoring for up to 4 users with multi-stream real time transmission
Network Protocol	IPv4, IPv6, TCP, UDP, DHCP, NTP, DDNS, 802.1X, RTSP, Multicast, UPnP, Email, FTP, HTTPS, QoS
ONVIF	Yes
Ethernet	100Mbps
PoE	Yes
Power Supply	DC12V/~400mA / PoE/~5.2W
Work Environment	-30°C~60°C, 10%~90% Humidity
Junction Box	PR-JB12IP66 - PR-JB12IP64 - PR-WB-A


DIMENSIONS

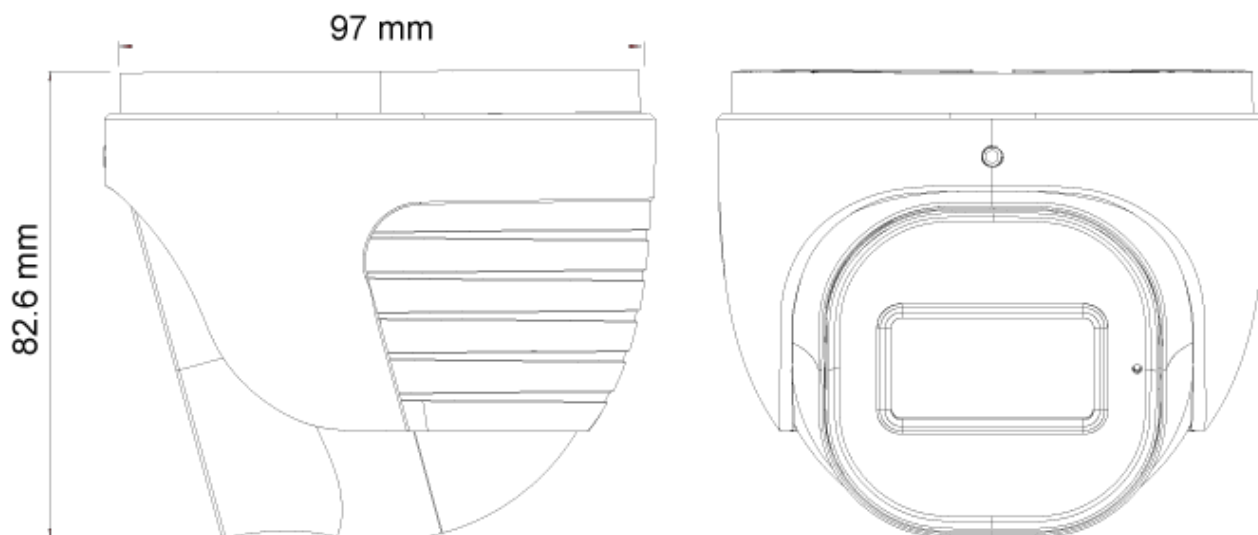

ACCESSORIES



PR-JB12IP66



PR-JB12IP64



PR-WB-A

IP RAINBOW SERIES

Provision-ISR's Rainbow cameras, equipped with CNV (Color Night Vision) technology, return sharp and superior quality colors even in poor light conditions, providing visual details that significantly contribute to the identification of people or objects.




DL-340IPERN-36

4MP DDA ANALYTICS 24/7 FULL-COLOR FIXED LENS DOME/TURRET CAMERA

Rainbow series cameras are equipped with super light sensitive sensors that allows the camera to provide a color image throughout the day. When the ambient light is insufficient, the camera will turn on its integral lighting that will allow it to continue to provide a full color image. The camera offers broad possibilities for Analytics, from Face Detection all the way to the outstanding DDA Analytics (Detect, Distinguish, Alert) which has the ability to perform object recognition and object counting. With a various of detection rules and triggers, DL-340IPERN-36 camera will help the user to put an end to false alarms.



DDA
VIDEO ANALYTICS



MAIN FEATURES

- 4MP
- RAINBOW
- EYE-SIGHT V2
- 2592×1520 Resolution
- 3D-DNR
- IP67
- DDA Analytics
- Audio in + Built in microphone

ANALYTICS

- General Analytics: Camera Tampering
- AI (Object Recognition): Humans, 2/4 wheels vehicles
DDA Sterile Area
DDA Line Crossing
DDA Object Counting
- AI (Face Detection): 10 Faces per frame




SPECIFICATIONS

Image Sensor	1/2.8" CMOS (16:9)
Effective Pixels	2592X1520
Electronic Shutter	1/25s ~ 1/1000000s
Frame Rate	1-25/30FPS
Day & Night	24/7 Full Color Day Mode
Min. Illumination	0 lux (LED On)
Audio compression	G.711A/G.711U
Communication	One-way Audio
Image Settings	AWB, AGC Adjustable, Exposure Mode (Auto) Sharpness, Saturation, Brightness & Contrast Adjustable
Image Enhancement	True WDR (120dB), BLC, HLC, ROI
Noise Reduction	3D-DNR
Image Orientation	Mirror/Flip
Privacy Zone	Yes
Motion Detection	Yes
Analytics	General Analytics: Camera Tampering AI (Object Recognition): DDA Sterile Area, DDA Line Crossing, DDA Object Counting AI (Face Detection): 10 Faces per frame
Video Compression	H.265/, H.265+/H.264/H.264+/MJPEG (Sub-Streams Only)
Resolution	4MP / 2K / 3MP / 2MP / 1MP / D1 / QVGA / CIF
Multi-Stream	Master Stream: 4MP(2592x1520) / 2K (2560x1440) / 3MP / 2MP / 1MP Sub-Stream: 1MP/QVGA/D1/CIF, Third Stream: QVGA/D1/CIF (1~30fps)
Bit rate	64Kbps ~ 7Mbps@H.265 / 64Kbps ~ 8Mbps@H.264
Encode Mode	VBR/CBR
Image Quality	Five levels under VBR; Free adjustment under CBR
IR Distance	25m (2 High Power IR LED)
Lens (Field of View)	3.6mm Fixed Lens (77.9°)

SPECIFICATIONS

Iris	Fixed Iris (F1.0)
Lens Mount	M12 mount
Protection Rate	Water Proof: IP67
Bracket	3-Axis Wall Bracket
Dimensions	Ø97mm×82.6mm
Weight (gross)	~450g
Network	RJ45 (+PoE)
Power	DC Socket
Analog Video Output	No
Audio Connectivity	Built-In Microphone + Audio Input
SD Card	Event/Schedule based Main/Sub-Stream recording (Up to 256Gb)
Hard Reset Button	Yes
Alarm	No
Remote Monitoring	IE Browsing, CMS Software, Provision Cam2 Mobile App
User Access	Supports simultaneous monitoring for up to 3 users with multi-stream real time transmission
Network Protocol	IPv4, IPv6, TCP, UDP, DHCP, NTP, DDNS, 802.1X, RTSP, Multicast, UPnP, Email, FTP, HTTPS, QoS
ONVIF	Yes
Ethernet	100Mbps
PoE	Yes
Power Supply	DC12V/~400mA / PoE/~5.2W
Work Environment	-30°C~60°C, 10%~90% Humidity
Junction Box	PR-JB12IP66 - PR-JB12IP64 - PR-WB-A


DIMENSIONS

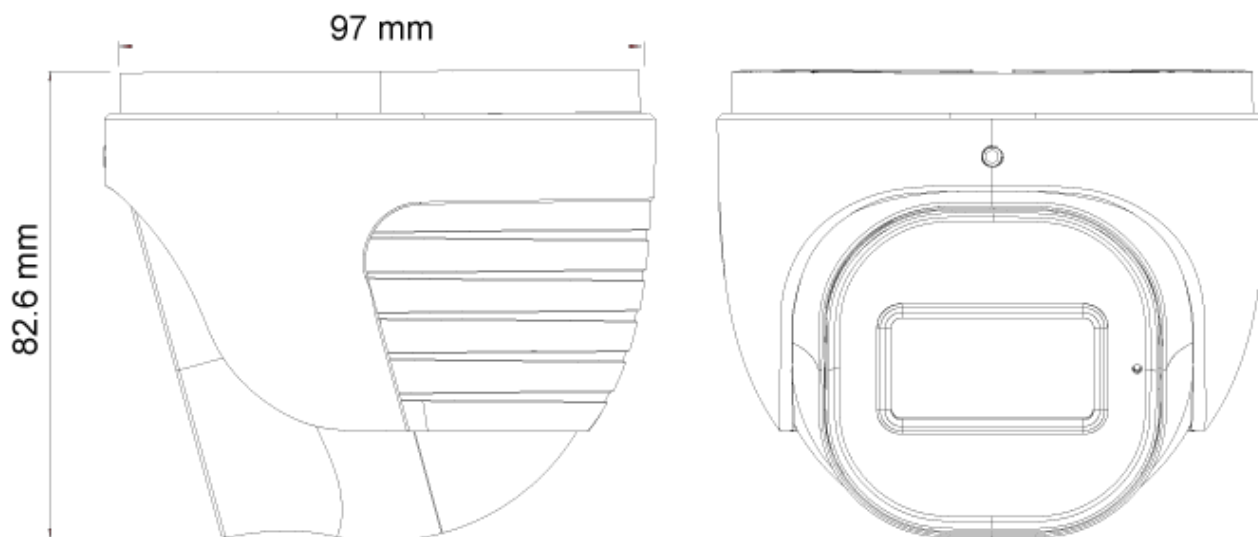

ACCESSORIES



PR-JB12IP66



PR-JB12IP64



PR-WB-A

Formularul ofertei (F3.1)

[Ofertantul va completa acest formular în conformitate cu instrucțiunile de mai jos. Nu se vor permite modificări în formatul formularului, precum și nu se vor accepta înlocuiri în textul acestuia.]

Data depunerii ofertei: **"15" februarie 2022**

Procedura de achiziție Nr ocds-b3wdp1-MD-1644408120576 din 09 / 02 / 2022

Anunț de participare Nr.: ocds-b3wdp1-MD-1644408120576 din 09 / 02 / 2022

Către: **Primăria com. Ecaterinovca** (**Sistem de supraveghere video la clădirea administrativă a primăriei**)

[numele deplin al autorității contractante]

Media Security SRL declară că:

[denumirea ofertantului]

- a) Au fost examinate și nu există rezervări față de documentele de atribuire, inclusiv modificările nr.
- b) **Media Security SRL** se angajează să
[denumirea ofertantului]
furnizeze în conformitate cu documentele de atribuire și condițiile stipulate în specificațiile tehnice și preț, următoarele bunuri
Sistem de supraveghere video IP
[introduceți o descriere succintă a bunurilor]
- c) Suma totală a ofertei fără TVA constituie:
29 640.35 (Douazeci si noua mii sase sute patruzeci lei, 35 bani)
[introduceți prețul pe loturi (unde e cazul) și totalul ofertei în cuvinte și cifre, indicând toate sumele și valutele respective]
- d) Suma totală a ofertei cu TVA constituie:
35 568.42 (Treizeci si cinci mii cinci sute saizeci si opt lei, 42 bani)
[introduceți prețul pe loturi (unde e cazul) și totalul ofertei în cuvinte și cifre, indicând toate sumele și valutele respective]
- e) Prezenta ofertă va rămâne valabilă pentru perioada de timp specificată în **FDA3.8.**, începînd cu data-limită pentru depunerea ofertei, în conformitate cu **FDA4.2.**, va rămîne obligatorie și va putea fi acceptată în orice moment pînă la expirarea acestei perioade;
- f) În cazul acceptării prezentei oferte, **Media Security SRL**
[denumirea ofertantului]
se angajează să obțină o Garanție de bună execuție în conformitate cu **FDA6**, pentru executarea corespunzătoare a contractului de achiziție publică.
- g) Nu sîntem în nici un conflict de interese, în conformitate cu art. 74 din Legea nr. 131 din 03.07.2015 privind achizițiile publice.
- h) Compania semnatară, afiliații sau sucursalele sale, inclusiv fiecare partener sau subcontractor ce fac parte din contract, nu au fost declarate neeligibile în baza prevederilor legislației în vigoare sau a regulamentelor cu incidență în domeniul achizițiilor publice.

Semnat: _____

[semnătura persoanei autorizate pentru semnarea ofertei]

Nume: **Gaina Victor**

În calitate de: **Administrator**

[funcția oficială a persoanei ce semnează formularul ofertei]

Ofertantul: **Media Security SRL**

Adresa: **str. Dmitrie Cantemir 5/4**



Data: **"15" februarie 2022**

Specificații tehnice (F4.1)

[Acest tabel va fi completat de către ofertant în coloanele 3, 4, 5, 7, iar de către autoritatea contractantă – în coloanele 1, 2, 6, 8]

Numărul procedurii de achiziție **ocds-b3wdp1-MD-1644408120576** din **09 / 02 / 2022**

Denumirea procedurii de achiziție: **Sistem de supraveghere video la clădirea administrativă a primăriei com. Ecaterinovca**

Cod CPV	Denumirea bunurilor	Modelul articolului	Țara de origine	Produ-cătorul	Specificarea tehnică deplină solicitată de către autoritatea contractantă	Specificarea tehnică deplină propusă de către ofertant	Standarde de referință
1	2	3	4	5	6	7	8
1	4MP IP Camera • S-Sight v2 Series • Real-Time • 1/2.7" CMOS • 2.8mm Fixed Lens	DI - 340IPS - 28	China	Provision ISR	Conform Caiet de sarcini	• 1/2.7" CMOS• Resolution: 2560x1440/25FPS (4MP)• Lens: 2.8mm Mega-Pixel Fixed• True Day & Night – ICR• IR Range: 20m (1 IR LED Array)• H.265/H.264 Compression• Basic Analytic Functions• D-WDR/BLC/HLC Support• PoE• SD Card Support (Up to 128GB)• Built-in Microphone• ONVIF• IP67• Weight: 490g• Power: DC 12V/~ 350mA /PoE/ 7.5W	
2	4MP DDA™ ANALYTICS 24/7 FULL-COLOR FIXED LENS DOME/TURRET CAMERA	DL-340IPERN-36	China	Provision ISR	Conform Caiet de sarcini	• 1/2.8" CMOS (16:9)• Resolution: 2592X1520 25/30FPS (4MP)• Lens: 3.6mm Fixed Lens (77.9°)• 24/7 Full Color Day Mode• IR Range: 25m (2 High Power IR LED)• H.265/, H.265+/H.264/H.264+/MJPEG (Sub-Streams Only)• General Analytics: Camera Tampering• AI (Object Recognition): DDA™ Sterile Area, DDA™ Line Crossing, DDA™ Object Counting • AI (Face Detection): 10 Faces per frame• True WDR (120dB), BLC, HLC, ROI Support• PoE• SD Card Support (Up to 256GB)• Built-in Microphone + Audio Input• ONVIF• IP67• Weight: ~450g• Power: DC 12V/~ 400mA /PoE/ ~5.2W	
3	4MP IP Camera • S-Sight v2 Series • Real-Time • 1/2.7" CMOS • 2.8mm Fixed Lens	I2 - 340IPS - 28	China	Provision ISR	Conform Caiet de sarcini	1/2.7" CMOS• Resolution: 2560x1440/25FPS (4MP)• Lens: 2.8mm Mega-Pixel Fixed• True Day & Night – ICR• IR Range: 20m (1 IR LED Array)• H.265/H.264 Compression• Basic Analytic Functions• D-WDR/BLC/HLC Support• PoE• SD Card Support (Up to 128GB)• ONVIF• IP67• Weight: 390g• Power: DC 12V/~ 420mA /PoE/ 5.4W	
4	8CH 5MP NVR	NVR5-8200PX+(MM)	China	Provision ISR	Conform Caiet de sarcini	Video: Input: 8 Channel PoE / Conventional Connection (8 x RJ-45 + 1 x RJ-45 Network) Support Output: HDMI: 1920x1080 (1080P), VGA: 1280x1024/1024x768 Bandwidth: Incoming: 40Mbps Outgoing: 40Mbps Decoding Support: H.265/H.264 Recording: Real-Time 8CH 5MP FPS: 200 (PAL) / 240 (NTSC) Resolution: 2592x1944 Playback: 8 Channels Simultaneously Analytics support: Camera Tampering, Line Crossing, Sterile Area, Object Monitoring Audio: Input: IP Camera inputs Alarm: Input: IP Camera inputs only Output: IP Camera outputs only Storage: 1 x SATA (Up to 6TB) USB Port: 2 x USB2.0 Network: RJ-45: 100Mbps	
5	HDD 1 Tb	3.5" HDD 1.0TB - SATA	China	Seagate	Conform Caiet de sarcini	3.5" HDD 2.0TB -SATA- 64MB Seagate "Video 3.5 (ST1000VM003)" Ref	

6	UPS 1000 V	UPS Ultra Power 1000VA/600W	China	Ultra Power	Conform Caiet de sarcini	UPS Ultra Power 1000VA/600W (3 steps of AVR, CPU controlled, USB) metal case, LCD display UPS1000MC 1000VA/600W Front Panel: LCD Display AVR: 3 steps of AVR, CPU controlled Input voltage range: 145~290Vac±5Vac Input frequency range: 50Hz / 60Hz (Auto sensing) Output voltage range: 200~255Vac Output frequency (DC mode): 50±0.5Hz / 60±0.5Hz Wave form: PWM (DC Mode) Transfer time: Typical 2~6ms, Max.10ms. 2 Germany Sockets Battery: 1 pcs*12V9Ah Charging period: 4~6 hours recover to 90% capacity PROTECTION: 1. Battery low voltage protection 2. Overload protection 3. Short circuit protection FUNCTION: 1. Auto re-starts when AC recovers 2. Silence setup 3. Automatic charging (offline charging) Unit dimension (mm): 350*120*188mm Net weight (kg): 9.6kg	
7	Monitor 21.5" SAMSUNG F22T350FHI, Black, IPS, 1920x1080, 75Hz,FreeSync, 5ms, 250cd, MegaDCR, D-Sub+HDMI	SAMSUNG F22T350FHI	China	Samsung	Conform Caiet de sarcini	21.5" SAMSUNG "F22T350FHI", Black (IPS 1920x1080, FreeSync 75Hz, 5ms, 250cd, D-Sub+HDMI), * 24" Full-HD Resolution and Bezel-less Design , * AMD Free Sync @75Hz Refresh Rate , * Game Mode , * Flicker Free	
8	Doza 100*100*50				Conform Caiet de sarcini	Conform Caiet de sarcini	
9	Cablu exterior FTP 5e ecranat				Conform Caiet de sarcini	Conform Caiet de sarcini	
10	Accesorii montare				Conform Caiet de sarcini	Conform Caiet de sarcini	

Semnat: _____ Numele, Prenumele: **Gaina Victor** În calitate de: **Administrator**
Ofertantul: **Media Security SRL** Adresa: **Colina Puschin 4 , sediul str. Dmitrie Cantemir 5/4**



Specificații de preț (F4.2)

[Acest tabel va fi completat de către ofertant în coloanele 5,6,7,8, iar de către autoritatea contractantă – în coloanele 1,2,3,4,9,10]

Numărul procedurii de achiziție ocde-b3wdp1-MD-1644408120576 din 09 / 02 / 2022

Denumirea procedurii de achiziție: Sistem de supraveghere video la clădirea administrativă a primăriei com. Ecaterinovca

Cod CPV	Denumirea bunurilor	Unitatea de măsură	Cantitatea	Preț unitar (fără TVA)	Suma (fara TVA)	Preț unitar (cu TVA)	Suma cu TVA	Termenul de livrare	Clasificație bugetară (IBAN)
1	2	3	4	5	6	7	8	9	10
	DI - 340IPS - 28	buc	2	1724,05	3448,10	2068,86	4137,72		
	DL-340IPERN-36	buc	2	1747,98	3495,95	2097,57	4195,14		
	I2 - 340IPS - 28	buc	2	1724,05	3448,10	2068,86	4137,72		
	NVR5-8200PX+(MM)	buc	1	3388,65	3388,65	4066,38	4066,38		
	HDD 1 Tb	buc	1	1305,00	1305,00	1566,00	1566,00		
	Doza 100*100*50	buc	6	58,00	348,00	69,60	417,60		
	UPS 1000 V	buc	1	2102,50	2102,50	2523,00	2523,00		
	Monitor 21.5" SAMSUNG F22T350FHI, Black, IPS, 1920x1080, 75Hz,FreeSync, 5ms, 250cd, MegaDCR, D-Sub+HDMI	buc	1	4306,50	4306,50	5167,80	5167,80		
	Cablu exterior FTP ecranat	m	305	11,31	3449,55	13,57	4139,46		
	Accesorii montare	buc	6	72,50	435,00	87,00	522,00		
	Lucrari de Montare si Punerea in Functiune	set	1	3913,00	3913,00	4695,60	4695,60		
	TOTAL				29640,35		35568,42		

Semnat: _____ Numele, Prenumele: **Gaina Victor** În calitate de: **Administrator**

Ofertantul: **Media Security SRL** Adresa: **Colina Puschin 4 , sediul str. Dmitrie Cantemir 5/4**



IP S-SIGHT SERIES

Provision-ISR S-SIGHT series provides you with all that you need for a simple installation. S-Sight cameras guarantee a superior image quality, improved night performance and make an outstanding value for money solution.



I2-340IPS-28

20M IR 4MP FIXED LENS BULLET CAMERA

Equipped with a 2.8mm fixed lens, this 4MP bullet camera is designed for short distance surveillance (up to 20m) in both indoor and outdoor scenarios.

With its great performances, reliability and affordable price I2-340IPS-28 camera is the perfect solution for any basic installation.



MAIN FEATURES

- 4MP
- 2592×1520 Resolution
- Wide field of view 110°
- 3D-DNR
- IP67

ANALYTICS

- General Analytics: Camera Tampering
- Standard Analytics: Line Crossing, Sterile Area




SPECIFICATIONS

Image Sensor	1/2.7" CMOS (16:9)
Effective Pixels	2592×1520
Electronic Shutter	1/25s ~ 1/100000s
Frame Rate	1-25/30FPS
Day & Night	ICR
Min. Illumination	Day: 0.1lux / Night: 0.03lux (@F2.0, AGC On) 0lux with IR on
Audio compression	N/A
Communication	N/A
Image Settings	AWB, AGC Adjustable, Exposure Mode (Auto) Sharpness, Saturation, Brightness & Contrast Adjustable
Image Enhancement	Digital WDR, BLC, HLC, ROI
Noise Reduction	3D-DNR
Image Orientation	Mirror/Flip
Privacy Zone	Yes
Motion Detection	Yes
Analytics	General Analytics: Camera Tampering Standard Analytics: Line Crossing, Sterile Area
Video Compression	H.265 / H.264 / MJPEG (Sub-Stream Only)
Resolution	4MP (2560x1440) / 3MP (2304x1296) / 2MP (1920x1080) / D1 / QVGA /CIF
Multi-Stream	Master Stream: 4MP (2560x1440) / 3MP (2304x1296) / 2MP (1~30fps) Sub-Stream: 1MP (1~12/15fps) /QVGA/D1/CIF (1~30fps) Third Stream: QVGA/D1/CIF (1~30fps)"
Bit rate	64Kbps ~ 5Mbps@H.265 / 64Kbps ~ 5Mbps@H.264
Encode Mode	VBR/CBR
Image Quality	Five levels under VBR; Free adjustment under CBR
IR Distance	20m (1 High Power IR LED)
Lens (Field of View)	2.8mm (110°)

SPECIFICATIONS

Iris	Fixed Iris
Lens Mount	M12 mount
Protection Rate	Water Proof: IP67
Bracket	3-Axis Bracket
Dimensions	172.2x73.4x74.5mm
Weight (gross)	~390g
Network	RJ45 (+PoE)
Power	DC Socket
Analog Video Output	No
Audio Connectivity	No
SD Card	Event/Schedule based Main/Sub-Stream recording (Up to 128Gb)
Hard Reset Button	Yes
Alarm	No
Remote Monitoring	IE Browsing, CMS Software, Provision Cam2 Mobile App
User Access	Supports simultaneous monitoring for up to 4 users with multi-stream real time transmission
Network Protocol	IPv4, IPv6, TCP, UDP, DHCP, NTP, DDNS, 802.1X, RTSP, Multicast, UPnP, Email, FTP, HTTPS, QoS
ONVIF	Yes
Ethernet	100Mbps
PoE	Yes
Power Supply	DC12V/~420mA / PoE/~5.4W
Work Environment	-30°C~60°C, 10%~90% Humidity
Junction Box	PR-JB12IP66 - PR-JB12IP64


DIMENSIONS

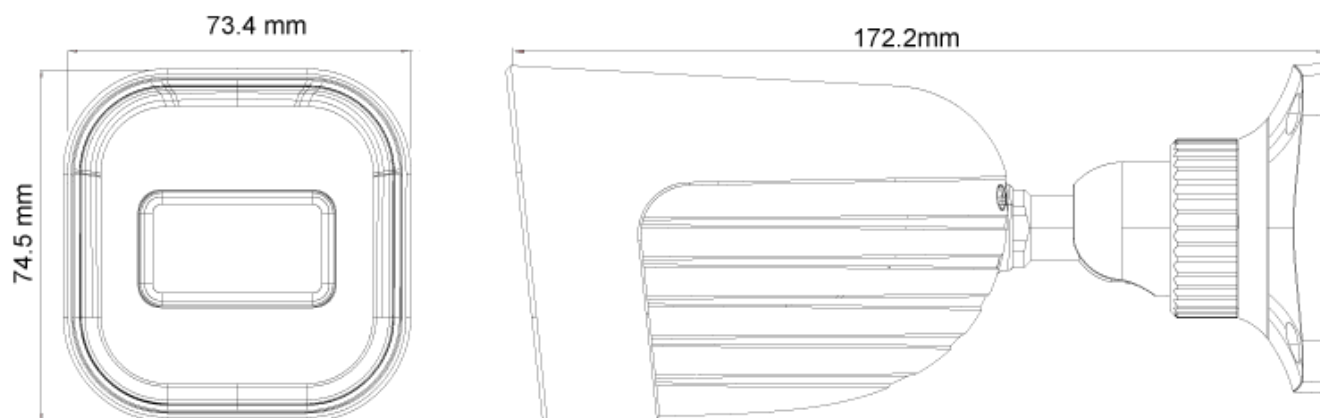

ACCESSORIES



PR-JB12IP66



PR-JB12IP64

NVR SERIES

Provision-ISR PoE NVRs feature built-in PoE switch meant for use with PoE based IP cameras.

Having a built-in switch allows for easy connection and configuration of IP cameras in a NVR system.

Simply run one CAT5e/6 cable from the camera to the NVR, and it will provide power to the camera while streaming video/audio/data all over one single cable.



NVR5-8200PX+(MM)

8CH 5MP POE NVR

Provision-ISR NVR5-8200PX+(MM) is a high performance network video recorder with integrated 8 channel PoE switch for high-definition surveillance.

This easy-to-install solution, available in the elegant mini metal case, is suitable for small-sized installations (up to 8 channels) and provides you with everything you need for a trouble-free CCTV project.



MAIN FEATURES

- Channels: 8 over Network / PoE
- Video output: HDMI / VGA (1080P, 1280x1024, 1024x768)
- Max. Recording: 4CH 5MP Real Time
- HDD: 1 SATA (6 TB Max)
- Alarms: IPC Inputs/Outputs only
- Audio: IPC Inputs/Outputs only
- Video Analytics: Yes (Must be supported by IPC)
- DDA and LPR support



SPECIFICATIONS

Video	Input	8Ch Over Network / PoE Direct Connection
	Output	HDMI / VGA (1080P, 1280x1024, 1024x768)
	View Mode	Mirrored
	Decoding Format	H.265 / H.265+ / H.265S / H.264
	Decoding Capabilities	1Ch - 5MP ; 4/8Ch - D1
Audio	Input	Based on IPC Only
	Output	Based on IPC Only
	Compression	G.711A/G.711U
	Two Way Audio	No
Analytics	Analytics Channels	8Ch (Requires supporting IPC)
	Supported Analytics	Camera Tampering, Line Crossing (DDA / Pixel Based), Sterile Area (DDA / Pixel Based), Object Monitoring, Object Counting (DDA), Crowd Gathering, People Intrusion, Smart Search, LPR *DDA/LPR Analytics Live Snapshots are not supported
	Face Recognition Rate	N/A
Bandwidth	Incoming	40Mbps
	Outgoing	40Mbps
Record / Remote App Record/ Main Stream	Real-Time Recording	8CH 5MP Real-Time
	Record Type	Video / Video + Audio
	8MP	N/A
	5MP and lower	240FPS (NTSC)/200FPS (PAL)
	Master stream over network	Up to 8CH@Recording Resolution

SPECIFICATIONS

Record / Remote App	Sub Stream	Resolution	Depends on IPC
		Sub-Streams over Network	Up to Outgoing Bandwidth Capacity
	General	Recording Modes	Schedule, Manual, Motion, Sensor, Analytics, POS and all of its combinations
		User Access	5 Users Online with Professional Authority Management
	Remote Applications	Mobile App	Provision Cam2 for iOS/Android
		PC/Mac Software	Ossia VMS Standard / Enterprise
		Plug-in free Web-Browser	Chrome, FireFox, Safari, Edge, Opera.(All Limited to 4Ch Live View / Playback)
		Plug-in based Web-Browser	Internet Explorer
	Playback	Local Playback	8Ch
		Remote Playback (Web, App, VMS)	8Ch
		Search Mode	DDA Object, Smart Search, LPR, Time-Slice, Time, Event, POS
	Backup	USB	2 USB 2.0 Port
		Backup Format	AVI (Unencrypted) / Private Format (Encrypted / Unencrypted)
	Alarm	Input	Based on IPC Only
		Output	Based on IPC Only
	Storage	HDD	1
		E-SATA	None
		Max Capacity	Up to 6TB
		RAID	N/A

SPECIFICATIONS

PTZ	Connection	Via Network
	Supported Controls	Pan, Tilt, Zoom, Preset, Cruise, Scan, Iris, Focus
	RS-485	N/A
Network	Ethernet	10/100Mbps self-adaptive Ethernet interface
	Protocols	TCP/IPv4/IPv6, DHCP, DDNS, NTP, SMTP, SSL/TLS, UPnP, P2P, RTSP, FTP, HTTPS, 820.1X, SNMP, Auto Report (Ossia VMS)
	ONVIF	Full Device Support (Profile T/G, ONVIF Version 20.12)
	Ports	8xRJ45
	Speed	10/100Mbps (10Mbps Under CCTV Mode)
PoE	Standard	PoE (IEEE802.3AF)
	CCTV Mode	Yes (Up to 200m and 10Mbps bandwidth)
	Total Power	120W (Average 12.5W per Channel)
	Max. Power Output (Per Ch.)	~14W*
	Power Supply	DC48V/2.5A
Others	Power consumption (No HDD)	5W
	Dimension	W255xD220xH45mm
	Operation Temperature	0-50C

*Max power output will be reduced depending on cable quality and distance.



I.P. "AGENȚIA SERVICII PUBLICE"

Departamentul înregistrare și licențiere a unităților de drept

EXTRAS
din Registrul de stat al persoanelor juridice

nr. 5353 din 18.03.2021

Denumirea completă: **Societatea cu Răspundere Limitată «MEDIA SECURITY».**

Denumirea prescurtată: **«MEDIA SECURITY» S.R.L.**

Forma juridică de organizare: **Societate cu Răspundere Limitată.**

Numărul de identificare de stat și codul fiscal: **1006600023985.**

Data înregistrării de stat: **22.05.2006.**

Sediul: **MD-2005, str. Colina Pușkin, 4, mun. Chișinău, Republica Moldova.**

Modul de constituire: **nou creată.**

Obiectul principal de activitate:

1 Activitatea în domeniul televiziunii și radiodifuziunii;

2 Publicitate;

3 Tipărirea altor publicații (cărți, broșuri etc);

4 Alte activități de servicii prestate întreprinderilor, neincluse în alte categorii;

5 Tipărirea ziarelor;

6 Montarea și (sau) reglarea, asistența tehnică a sistemelor automate de semnalizare și de stingere a incendiilor, precum și de protecție a clădirilor împotriva fumului și de înștiințare în caz de incendiu;

7 Activitatea particulară de detectiv sau de pază.

Capitalul social: **5400 lei.**

Administrator: GAINA VICTOR, IDNP 0961107011088,

Asociați:

1. GAINA VICTOR, IDNP 0961107011088

cota 5400.00 lei, ce constituie 100 %.

Prezentul extras este eliberat în temeiul art. 34 al Legii nr. 220-XVI din 19 octombrie 2007 privind înregistrarea de stat a persoanelor juridice și a întreprinzătorilor individuali și confirmă datele din Registrul de stat la data de: 18.03.2021.

Specialist coordonator
tel. 022-207-840



Lazari Aliona



EB 0352429