


REVISIONS			
REV	DESCRIPTION	DATE	APPROVAL
A	Initial release	05-07-14	EC07767
B	Add drawers	3-16-15	EC08624

caping to the way YOU do business!

Large Aluminum Base (LAB):

(K2 Part # LAB-4002-CZMI)

- 14.7 lbs (6.7 kg)
- High Pressure Aluminum Die Cast Construction.
- CZMI Bases painted RAL 7016 with a linen finish.

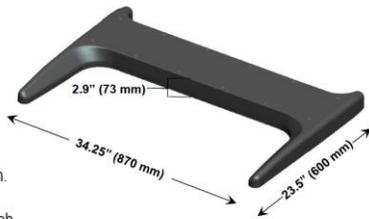

- 2.5" (63mm), M10 threaded stem, locking wheels. Each caster is rated at 145 lbs (65 Kg) load capacity.



- When using the casters provided, the table is not intended to be moved outside the room in which the table is to be operated.
- M10 carpet glides ship installed.
- Auxiliary Cords ship with this part.

Approximate Weight:
40 kg



PROPRIETARY NOTICE

This is an original unpublished work and may not be copied, disclosed, or used in whole or in part, without the consent of Carl Zeiss Meditec.

All designs, drawings, technical and engineering data, and all unpublished information are the sole and exclusive property of Carl Zeiss Meditec.

Title:


**TABLE 25X36 LAB
120V UNAS**



5160 Hacienda Drive, Dublin, CA 94568

ENGR/DSGNR	S.Voves	DATE	SIZE	PART NUMBER	REV
DRAWN	S. Voves	See ECO	A	2660021155109	B
CHECKED	See ECO	See ECO			
APPROVED	See ECO	See ECO			
SHEET			1	OF	3

REVISIONS			
REV	DESCRIPTION	DATE	APPROVAL
--	See sheet 1	--	--

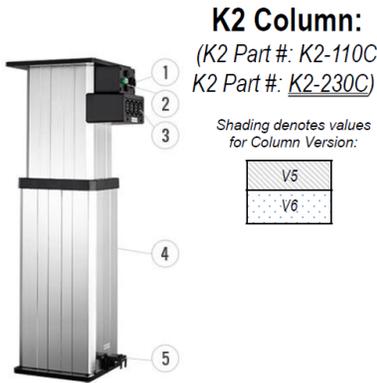

K2 Column:
 (K2 Part #: K2-110C
 K2 Part #: K2-230C)

Shading denotes values for Column Version:

V5
V6

1. Connection for Large Buttoned Directional Switch
2. Fuses or Circuit Breakers
3. Auxiliary Box: 4 outlets / sum 9A
Cords and Power Supply: IEC-320-14 Auxiliary Cords provided for use with medical devices (ship with LAB). Devices that do not meet this qualification must be plugged into an Isolation Transformer.
4. Extruded Aluminum Construction
5. Line Cord Protector

Compatibility	This electrically powered, actuator-driven lift column is compatible with two different table bases and a variety of table tops. The table's intended use is to serve as a component of a platform adaptable for medical and scientific instrumentation.			
Input / Output Voltage	100-120 VAC		230 VAC	
Input Current	10 A	11.4 A	10 A	10.6 A
Input Frequency	50/60 Hz			
Column Power (Max)	100 VA	116 VA	100 VA	130 VA
Output Current	9 A	10 A	9 A	10 A
Overload Cut Off	Fuses: T10AL, 250V		Fuses: T10AL, 250V	
	Circuit Breakers: 10A, 250V		Circuit Breakers: 10A, 250V	
Actuator load limit	125 Kg (275 lbs)			
Duty	Max 2 min ON, 20 min OFF			
Mode of Operation	Momentary			
Classification	Class 1 Type B ⚡			
Temperature Limits	Transit/Storage +14° F to + 158° F -10° C to + 70° C		Operating +41° F to + 104° F +5° C to + 40° C	
Relative Humidity Limits	Transit/Storage 10% to 90%		Operating 30% to 70% Non-Condensing	
Atmospheric Limits	14.8 inHg to 31.3 inHg, 500 hPa to 1060 hPa			
Min/Max Height	21" / 535 mm		29.5" / 750 mm	
Stroke Length	215 mm			
Lift Speed	8.0 to 18.0 mm/sec			
Weight	29.9 lbs (13.6 Kg)			
Degree of protection against ingress of water	Ordinary			
Certifications	With respect to electrical hazards only in accordance with: CE MDD, IEC 60601-1, EMC IEC 60601-1-2, 2007, AAMI STD. ES60601-1-2005(R2013), CAN/CSA STD. -C22.2 No. 60601-1.08.			
Expected Lifetime	8 years in ophthalmic operating environment.			
Equipment is not suitable for use in the presence of flammable anesthetic mixtures with air, oxygen or nitrous oxide.				
No user serviceable parts.				

25" x 36" Top:
 (K2 Part #: 2536SCP5-CZMI)

Base Specified	LAB, P5
Carrier Plate	625mm x 266mm x 14mm ; 4.0 Kg (Ships assembled to top)
K2 Spacer	80mm height (Ships assembled to carrier plate, P5)
Grommet Hole	40mm – 60mm
Grommet Color	White
Core Material	MDF CARB 2 Compliant
Density	720-740 KG/Cubic M
Thickness	28mm – 31mm
Top and Sides Covering	PVC Coating Color NCS S1002 B with fine texture
Protective Molding	PVC Color Pantone Cool Grey 3
Underside Covering	Black Melamine
Attachment Site	Metal Threaded Inserts
Additional Specifications	Contains Assembly Instructions. Contains Storage Drawer (Page 10). Counter bore for instrument feet and two through holes for instrument attachment (Page 11). (2) M4x40 Socket Head Cap Screws with Flat Washer, located in storage drawer (page 10).

PROPRIETARY NOTICE

This is an original unpublished work and may not be copied, disclosed, or used in whole or in part, without the consent of Carl Zeiss Meditec.

All designs, drawings, technical and engineering data, and all unpublished information are the sole and exclusive property of Carl Zeiss Meditec.

Title:

**TABLE 25X36 LAB
120V UNAS**




CARL ZEISS MEDITEC

5160 Hacienda Drive, Dublin, CA 94568

ENGR/DSGNR	See sheet 1	DATE	SIZE	PART NUMBER	REV
DRAWN	See sheet 1	--	A	2660021155109	B
CHECKED	See sheet 1	--			
APPROVED	See sheet 1	--	SHEET 2	OF 3	


REVISIONS			
REV	DESCRIPTION	DATE	APPROVAL
--	See sheet 1	--	--

Storage Drawer:
(K2 Part #: DRWR-SCTP)

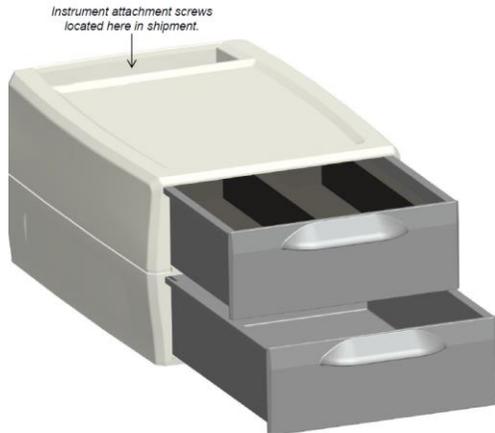

Intended Use	Storage for ARCM and MARCM, alcohol wipes, and eye patch.
Color	Drawer Housing = NCS S1002B Drawers = RAL U713
Materials	ABS Plastic EVA Foam insert in top drawer
Approximate Weight	1 kg
Exterior Dimensions	269mm x 179mm x 121mm
Inside Drawer Dimensions	194mm x 139mm x 50mm
Ships	Drawer Mount pre-attached to the top; Drawer Housing as a complete unit in top box (attached to top in assembly).

Pattern/Depth of Counter Bores and Through Holes:

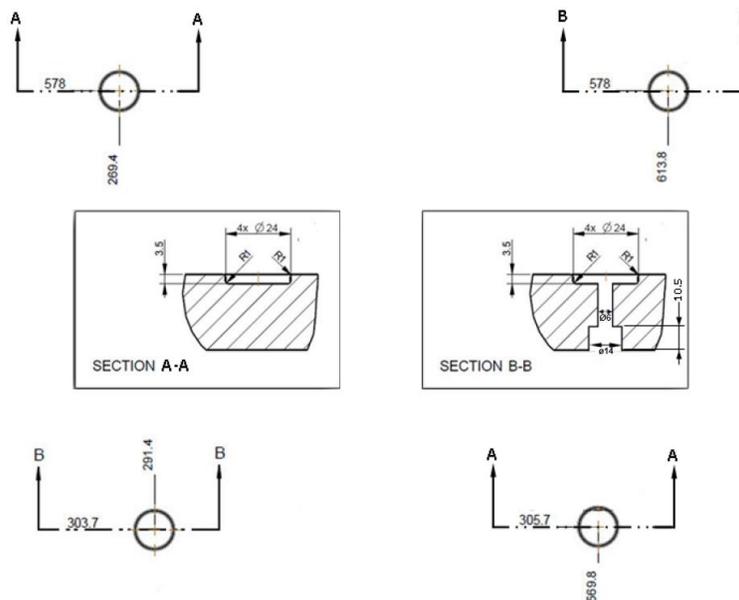

PROPRIETARY NOTICE

This is an original unpublished work and may not be copied, disclosed, or used in whole or in part, without the consent of Carl Zeiss Meditec.

All designs, drawings, technical and engineering data, and all unpublished information are the sole and exclusive property of Carl Zeiss Meditec.

Title:

**TABLE 25X36 LAB
120V UNAS**



CARL ZEISS MEDITEC

5160 Hacienda Drive, Dublin, CA 94568

ENGR/DSGNER	See sheet 1	DATE	SIZE	PART NUMBER	REV
DRAWN	See sheet 1	--	A	2660021155109	B
CHECKED	See sheet 1	--			
APPROVED	See sheet 1	--	SHEET 3	OF	3