


Specifications

UC1218-4K PRO

UC1218-4KS

Connections	<ul style="list-style-type: none"> 1xHDMI 2.0 in 1xHDMI 2.0 loop-out 1xType C (USB 3.1 Gen2, 10Gbps) 	<ul style="list-style-type: none"> 1xHDMI 2.0 in 1xHDMI 2.0 loop-out 1xType C (USB 3.0, 5Gbps)
Video Interface	<ul style="list-style-type: none"> 1x3.5mm stereo audio(Line in) 1x3.5mm stereo audio(Mic in) 1x3.5mm stereo audio out 	
Format	<ul style="list-style-type: none"> Up to 4K60Hz, 2K144Hz, 1080p240Hz UVC (USB video class) standard UAC (USB audio class) standard 2-channel, 16 bit PCM, 44, 1kHz, 1411kbps 	
Audio Codec	<ul style="list-style-type: none"> RGB24: Up to 2560x1440 p60 P010: Up to 3840x2160 p60 YUY2: Up to 3840x2160 p50 NV12: Up to 3840x2160 p60 I420: Up to 3840x2160 p60 MJPEG: Up to 3840x2160 p60 	<ul style="list-style-type: none"> RGB24: Up to 2560x1440 p30 P010: Up to 3840x2160 p60 YUY2: Up to 2560x1440 p60 NV12: Up to 3840x2160 p30 I420: Up to 3840x2160 p30 MJPEG: Up to 3840x2160 p60
OS and Software Compatibility	<ul style="list-style-type: none"> Windows 7/8/10/11 , Linux (Kernel version 2.6.38 and above), macOS (10.8 and above) 	
Supports OS	<ul style="list-style-type: none"> OBS studio, Skype, ZOOM, Teams, Google Meet, Youtube Live, QuickTime Player, Face time, etc. 	
Software Compatibility	<ul style="list-style-type: none"> DirectShow(Windows), DirectSound(Windows) 	
Others		
Dimensions	104x75.5x19mm	
Weight	Net weight:274g Gross Weight: 403g	
Power Consumption	4.5W ±10%	
Operating Temperature	-20~60°C	
Storage Temperature	-30~70°C	
Relative Humidity	20~90% RH (no condensation)	
Warranty	3 Years	

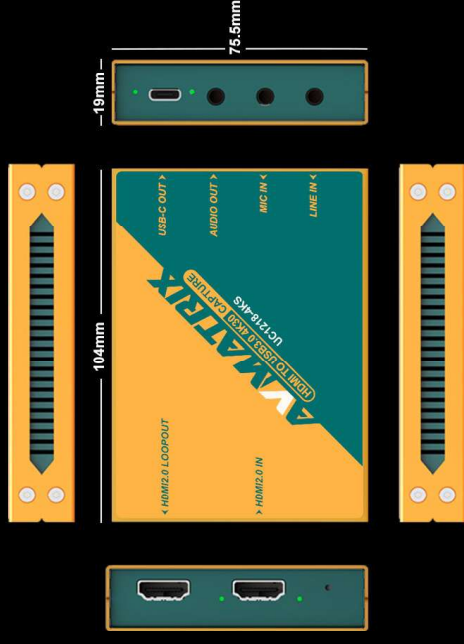

Accessories



USB3.0 A-C Cable



HDMI Cable (Optional)

WWW.AVMATRIX.COM

ZHANGZHOU MATRIX ELECTRONIC TECHNOLOGY CO., LTD.
 Add: 26 Fuyi North Road, Lantian Economic Development Zone, Pingdingshan, Fujian, 353005, China
 Tel: +86-556-2103372/2103662 Fax: +86-556-2109611 E-mail: sales@avmatrix.com

