


AC2XABY 0,6/1kV

**Crosslinked polyethylene insulated PVC sheated power cable,
steel tape armored. Aluminium conductor**

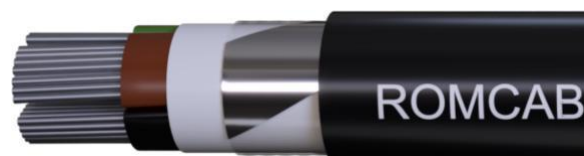

Application

Power supply to power stations. The cables must be protected against: corozive chemicals and chemical solvents . UV resistant cables.

Construction

Monowire or multi wire aluminium conductors
 XLPE Insulated conductors
 Filler
 PVC Inner sheath
 Blank or zinc-plated cold rolled
 PVC Outer sheath

Standards and Certifications

SR CEI 60502
 SR EN 60228

Technical Data

Nominal voltage U_0/U	[V]	600 / 1000V
Test voltage	[V]AC	4000V
Min. perm. temperature	with installation and handling	-5°C
	storage	-40°C
Max. perm. temperature	storage	+90°C
Operating temperature	Max.	+250°C
Short circuit time	Max. [sec]	5
Bending radius	multi core x diameter	12

AC2XABY 0,6/1kV - Crosslinked polyethylene insulated and PVC sheated power cable, steel tape armored, aluminium conductor

Technical data, dimensions and weights are subject to change. All sizes and values without tolerances are reference values. Specifications are for products supplied by ROMCAB: any modification or alteration of products may give different results. The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of Romcab S.A. The information is correct to the best of our knowledge at the time of publication. Romcab S.A. reserves the right to amend this specification without prior notice. This specification is not contractually valid unless specifically authorized by Romcab. © All rights reserved by ROMCAB S.A • www.Romcab.com

Number of cores x Cross- section	Overall diameter (approx.) [mm]	Weight (approx.) [kg/km]	Maximum electrical resistance at 20° C [Ω/km]
1 x 50 RM	17.5	380	0.641
1 x 70 RM	20	470	0.443
1 x 95 RM	22	600	0.32
1 x 120 RM	23	680	0.253
1 x 150 RM	26	820	0.206
1 x 185 RM	28	1010	0.164
1 x 240 RM	31	1180	0.125
1 x 300 RM	33	1400	0.1
3 x 10 RE	19.5	330	3.08
3 x 16 RE	22.5	430	1.91
3 x 25 RM	27	590	1.2
3 x 35 RM + 16 RE	32.5	800	0.868 / 1.91
3 x 50 SM + 25 RM	36	1020	0.641 / 1.2
3 x 70 SM + 35 SM	38	1320	0.443 / 0.868
3 x 120 SM + 70 SM	45.5	2300	0.253 / 0.443
3 x 150 SM + 70 SM	51	2800	0.206 / 0.443
3 x 185 SM + 95 SM	54	3310	0.164 / 0.32
3 x 240 SM + 120 SM	61	4100	0.125 / 0.253
4 x 10 RE	22	400	3.08
4 x 16 RE	24	510	1.91
4 x 25 RM	27	720	1.2
4 x 35 RM	28.5	900	0.868
4 x 50 SM	31	1120	0.641
4 x 70 SM	35	1420	0.443
4 x 95 SM	39	2110	0.32
4 x 120 SM	45.5	2550	0.253
4 x 150 SM	51	3100	0.206

**AC2XABY 0,6/1kV - Crosslinked polyethylene insulated and PVC sheathed power cable,
steel tape armored, aluminium conductor**

Technical data, dimensions and weights are subject to change. All sizes and values without tolerances are reference values. Specifications are for products supplied by ROMCAB: any modification or alteration of products may give different results. The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of Romcab S.A. The information is correct to the best of our knowledge at the time of publication. Romcab S.A. reserves the right to amend this specification without prior notice. This specification is not contractually valid unless specifically authorized by Romcab. © All rights reserved by ROMCAB S.A • www.Romcab.com

Number of cores x Cross- section	Overall diameter (approx.) [mm]	Weight (approx.) [kg/km]	Maximum electrical resistance at 20° C [Ω/km]
4 x 185 SM	54	3700	0.164
4 x 240 SM	61	4650	0.125
5 x 10 RE	22.5	460	3.08
5 x 16 RE	26	603	1.91
5 x 25 RM	33	850	1.2
5 x 35 RM	35	1072	0.868
5 x 50 RM	40	1400	0.641
5 x 70 RM	43	1650	0.443

Designation

RE	Solid round conductors
RM	Stranded round conductors
SM	Stranded sector conductors

AC2XABY 0,6/1kV - Crosslinked polyethylene insulated and PVC sheated power cable, steel tape armored, aluminium conductor

Technical data, dimensions and weights are subject to change. All sizes and values without tolerances are reference values. Specifications are for products supplied by ROMCAB; any modification or alteration of products may give different results. The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of Romcab S.A. The information is correct to the best of our knowledge at the time of publication. Romcab S.A. reserves the right to amend this specification without prior notice. This specification is not contractually valid unless specifically authorized by Romcab. © All rights reserved by ROMCAB S.A • www.Romcab.com