

AXIS W701 Mk II Docking Station 8-bay

AXIS W701 Mk II Docking Station 8-bay enables easy handling of the body worn cameras with fast charging, quick, secure and easy data offloading.


- > **Grab and go, ready when you are**
- > **Dock and go, for automatic reliable offloading and fast charging**
- > **Reliable docking connectors**
- > **Splash proof**



AXIS W701 Mk II Docking Station 8-bay

Network		Supply chain	TAA compliant
Network protocols	IPv4, IPv6 USGv6, HTTPS, mDNS (Bonjour), DNS/DNSv6, NTP, TCP, UDP, ICMP, DHCPv4/v6, ARP	EMC	CISPR 35, CISPR 32 Class A, EN 55032 Class A, EN 55035, EN 61000-6-1, EN 61000-6-2 Australia/New Zealand: RCM AS/NZS CISPR 32 Class A Canada: ICES-3(A)/NMB-3(A) Japan: VCCI Class A USA: FCC Part 15 Subpart B Class A
Throughput	100 Mbit/s (per camera)	Safety	CAN/CSA C22.2 No. 62368-1 ed. 3, IEC/EN/UL 62368-1, RCM AS/NZS 62368.1:2022
General		Environment	IEC 60068-2-1, IEC 60068-2-14, IEC 60068-2-2, IEC 60068-2-78
Capacity	8 bays	Network	Compatible with NIST SP500-267 throughput
Casing	Plastic casing Color: black NCS S 9000-N	Sustainability	
Power	12 V DC, max 120 W	Substance control	PVC free RoHS in accordance with EU RoHS Directive 2011/65/EU/ and EN 63000:2018 REACH in accordance with (EC) No 1907/2006. For SCIP UUID, see echa.europa.eu
Connectors	Network: Shielded RJ45 10BASE-T/100BASE-TX/1000BASE-T Power: DC input Pogo pin pads	Materials	Screened for conflict minerals in accordance with OECD guidelines To read more about sustainability at Axis, go to axis.com/about-axis/sustainability
Operating conditions	Temperature: 0 °C to 40 °C (32 °F to 104 °F) Humidity: 10–85% RH (non-condensing)	Environmental responsibility	axis.com/environmental-responsibility Axis Communications is a signatory of the UN Global Compact, read more at unglobalcompact.org
Storage conditions	Temperature: -40 °C to 65 °C (-40 °F to 149 °F) Humidity: 10–85% RH (non-condensing)		
Dimensions	For the overall product dimensions, see the dimension drawing in this datasheet.		
Weight	860 g (1.90 lb)		
Box content	Docking station, power supply, screws, installation guide		
Warranty	3-year warranty, see axis.com/warranty		
Part numbers	Available at https://www.axis.com/products/axis-w701-mk-ii-docking-station-8-bay#part-numbers		
Approvals			
Product markings			
UL/cUL, CE, KC, VCCI, RCM, NOM, WEEE, ICES, FCC			

Dimension drawing

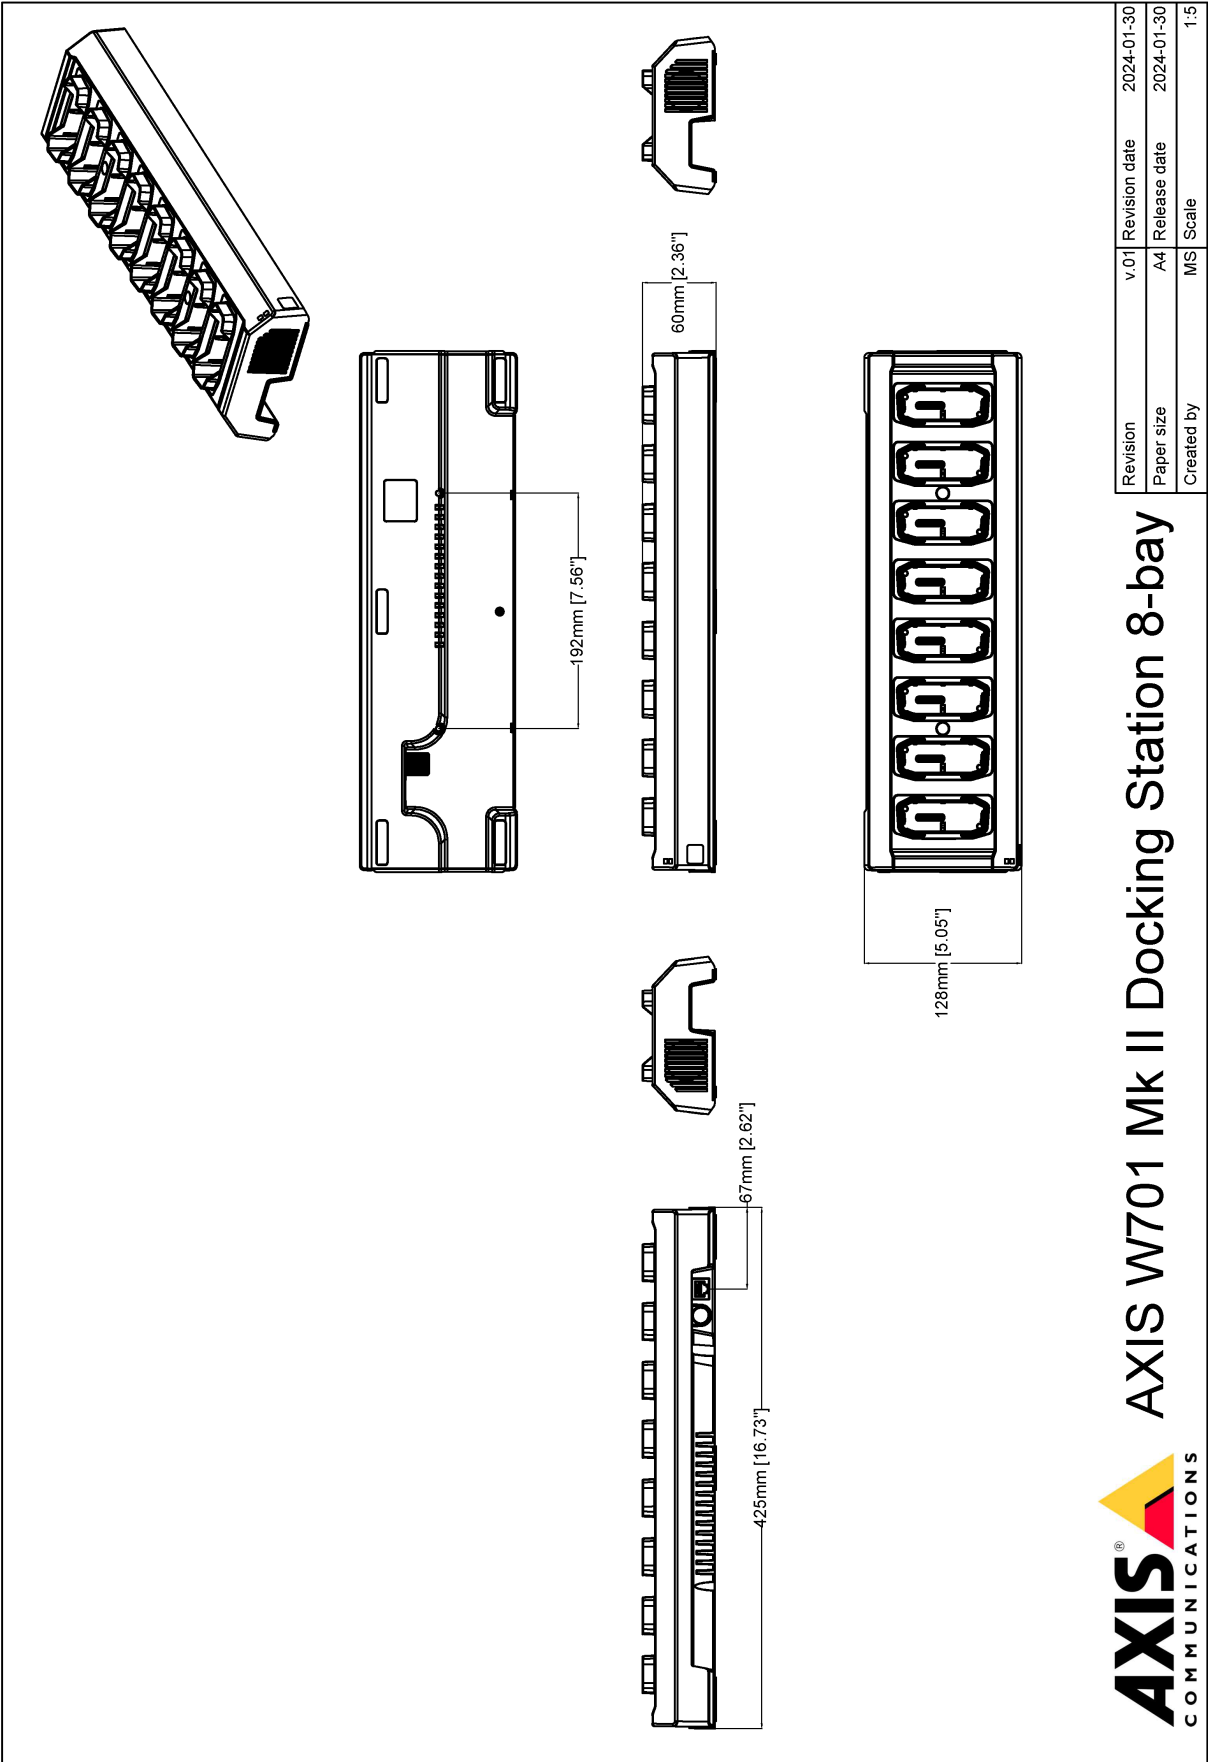

©2024 Axis Communications AB. AXIS COMMUNICATIONS, AXIS, ARTPEC and VAPIX are registered trademarks of Axis AB in various jurisdictions. All other trademarks are the property of their respective owners. We reserve the right to introduce modifications without notice.