



VIVIX-S 4343VW

Wireless Portable Flat Panel Detector for Digital Radiography




Excellent
Durability

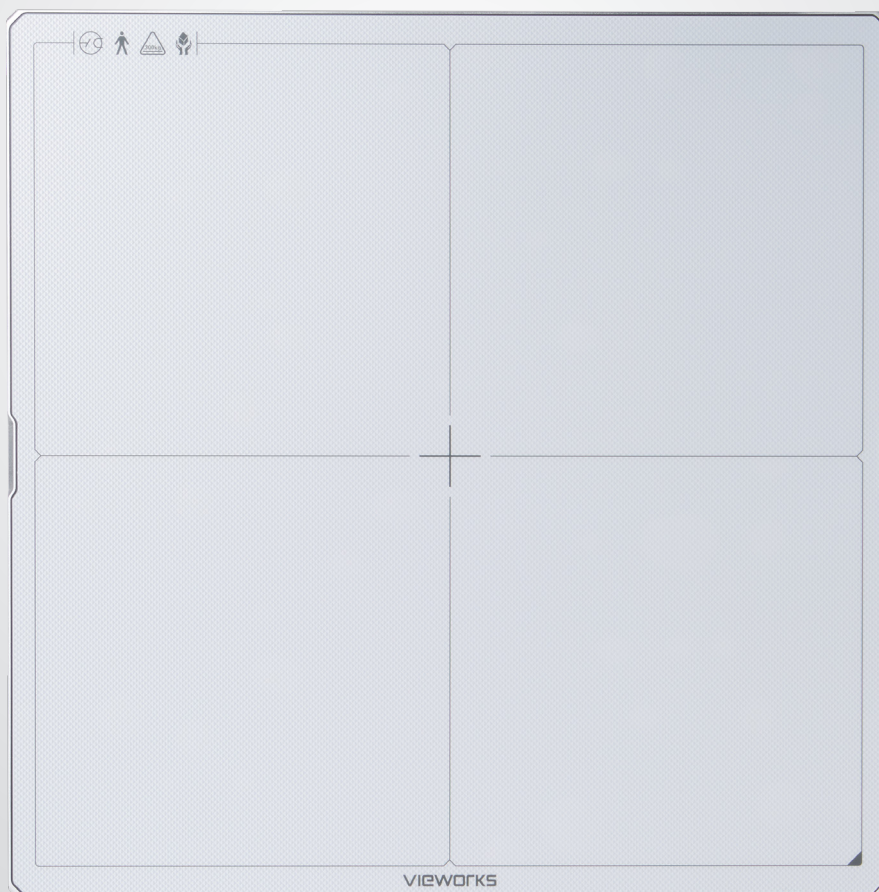

inside AP™

Faster and More
Stable Wireless
Communication



Real
Mobility




anytime™

Stable and reliable AED
(Automatic Exposure
Detection)

VIVIX-S 4343VW

Wireless Portable Flat Panel Detector for Digital Radiography




Supreme Durability

VIVIX-S V series passes drop testing of 100cm and guarantees up to 300 kg under uniform load and 150 kg under the local load.



IP67 Water and Dust Resistance

IP67 means that the series can operate safely in the water for up to 30 minutes at depths of less than 1 meter.



Greater Portability

VIVIX-S V is the lightest weight series with an ergonomic designed and improved grips.



Wider Operating Temperature

VIVIX-S V series operates from 0°C to 40°C, so it is suitable for outdoor or emergency usage.



Convenient Charging

VIVIX-S V series offers a variety of charging methods, including standard USB-C and magnetic tether connectors and provides a cradle for safe-storing and easy-charging.



Long Lasting Battery

VIVIX-S V series comes with two batteries, allowing up to 16 hours of long operation. Additionally, by using an easy-charging cradle, it allows seamless operation all the time.


Technical Specifications

VIVIX-S 4343VW

| | |
|---------------------------|---|
| Model Name | FXRD-4343VAW / FXRD-4343VAW PLUS |
| Technology | a-Si TFT |
| Scintillator | CsI |
| Pixel Pitch | 140 μ m |
| Spatial Resolution | 3.5 lp/mm |
| Pixel Matrix | 3072 x 3072 pixels |
| Image Size (HxW) | 17" x 17" (43 cm x 43 cm) |
| Grayscale | 16 bits |
| Image Acquisition Time | 3 s |
| Recommended Cycle Time | 4 s |
| Data Interface | Gigabit Ethernet IEEE 802.11n / ac |
| X-ray Generator Interface | DR Trigger Mode / AED Mode |
| Dimensions (HxWxD) | 46 cm x 46 cm x 1.5 cm |
| Weight | 3.5 kg (one battery) 3.7 kg (two batteries) |
| Battery | Lithium Ion 3400mAh x 2 16 h (standby) * 3,000 images at a 15-second cycle. |
| Dust and Water Resistant | IP67 |
| X-ray Voltage Range | 40 - 150 kVp |
| Operating Environment | 0°C to 40°C 5 % to 90 % RH (non-condensing) |
| Power Consumption | Normal: Max. 24W, Charging: Max. 80W |

* Specifications are subject to change without prior notice.

Dimensions

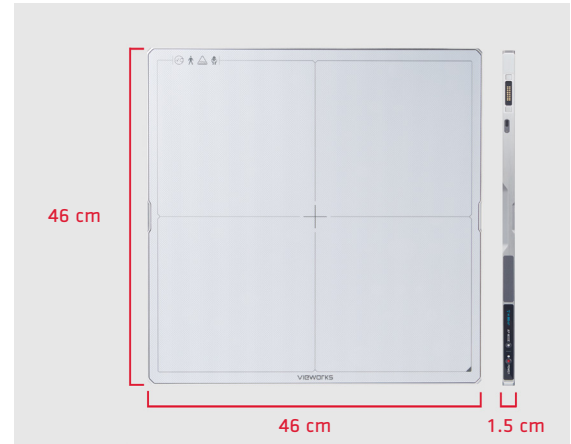

Distributed By: