
RADIFOCUS Introducer II STANDARD KIT

Introducer Sheath

Introducers are intended to be inserted percutaneously into a vessel to facilitate the entire interventional procedure.

Product Characteristics

- Total Integrated Fit (TIF) tip tapering: optimal tapering design at the tip of the sheath and dilator for smooth penetration
- Cross-cut hemostasis valve: effectively protects against blood reflux and air aspiration
- Thin radiopaque sheath with anti-kinking sleeve: for excellent catheter handling
- Snap-on / click-off dilator lock: prevents dilator back-out during insertion and allows one-hand unlocking
- Wide variety of kit variations providing all elements for quick vessel access: 4 11 Fr sheaths, 5 25 cm lengths, Surflash or micro puncture metal needle

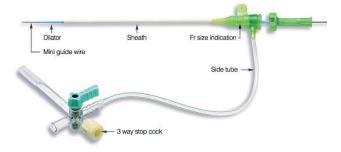

Available Kits

- A Kit contains sheath, dilator,
 plastic mini guidewire and plastic IV catheter (entry needle)
- B Kit contains sheath, dilator, plastic or spring mini guidewire
- . C Kit contains sheath and dilator
- R Kit contains sheath, dilator, spring mini guidewire and metallic entry needle



General Specifications

Sheath length	10 cm
Mini guidewire	Plastic Straight and Angled 0.025" (0.64 mm) for 4 Fr, 0.035" (0.89 mm) for all others 45 cm
Entry needle	Plastic IV Catheter - 18G x 2 ½" (1.2 x 64 mm), except for 4 Fr : 20G x 2" (0.9 x 51 mm), 2.5 ml syringe is included
Guidewire compatibility	0.025" (0.64 mm) for 4 Fr 0.035" (0.89 mm) for all others
Packaging	Tray

□ B Kit

1st Type in tray with plastic mini guidewire General Specifications

Sheath length	10 cm and 25 cm
Mini guidewire	Plastic Straight and Angled 0.025" (0.64 mm) or 0.035" (0.89 mm) for 4 Fr and 0.038" (0.97 mm) for all others 45 cm for 10 cm sheath and 80 cm for 25 cm sheath
Guidewire compatibility	0.025" (0.64 mm) or 0.035" (0.89 mm) for 4 Fr and 0.038" (0.97 mm) for all others
Packaging	Tray

Item Specifications

Inner	Mini guide	wire type
diameter	45 cm angled	45 cm straight
4 Fr	RS+A40K10AQ	RS+A40G10SQ
5 Fr	RS+A50K10AQ	RS+A50K10SQ
6 Fr	RS+A60K10AQ	RS+A60K10SQ
7 Fr	_	RS+A70K10SQ
8 Fr	_	RS+A80K10SQ
9 Fr	_	RS*A90K10SQ
10 Fr	_	RS*A10K10SQ
11 Fr	_	RS*A11K10SQ

Please quote above item reference codes when placing an order

Item Specifications

Inner	Guidewire	Sheath le	ngth 10 cm	Sheath length 25 cm
diameter	compatibility		Mini guidewire type	
		45 cm angled	45 cm straight	80 cm angled
4 Fr	0.025" (0.64 mm)	_	RS+B40G10SQ	_
4 Fr	0.035" (0.89 mm)	RS+B40K10AQ	RS+B40K10SQ	_
5 Fr	0.038" (0.97 mm)	RS+B50N10AQ	RS+B50N10SQ	RS+B50N25AQ
6 Fr	0.038" (0.97 mm)	_	RS+B60N10SQ	RS+B60N25AQ
7 Fr	0.038" (0.97 mm)	_	RS+B70N10SQ	RS+B70N25AQ
8 Fr	0.038" (0.97 mm)	_	RS+B80N10SQ	RS+B80N25AQ
9 Fr	0.038" (0.97 mm)	_	RS*B90N10SQ	RS*B90N25AQ
10 Fr	0.038" (0.97 mm)	_	RS*B10N10SQ	RS*B10N25AQ
11 Fr	0.038" (0.97 mm)	_	RS*B11N10SQ	RS*B11N25AQ



B Kit

2nd Type in tray with spring mini guidewire

General Specifications

Sheath length	10 cm	
Mini guidewire	Spring, J-type 0.035" (0.89 mm) and 0.038" (0.97 mm) 45 cm	
Guidewire compatibility	0.035" (0.89 mm) or 0.038" (0.97 mm)	
Packaging	Tray	

Item Specifications

Inner	Guidewire compatibility	
diameter	0.035" (0.89 mm)	0.038" (0.97 mm)
4 Fr	RS+B40K10MQ	_
5 Fr	RS+B50K10MQ	RS+B50N10MQ
6 Fr	RS+B60K10MQ	RS+B60N10MQ
7 Fr	RS+B70K10MQ	RS+B70N10MQ
8 Fr	RS+B80K10MQ	RS+B80N10MQ
9 Fr	RS*B90K10MQ	RS*B90N10MQ
10 Fr	RS*B10K10MQ	RS*B10N10MQ
11 Fr	RS*B11K10MQ	RS*B11N10MQ

Please quote above item reference codes when placing an order

3rd Type in pouch with spring mini guidewire General Specifications

Sheath length	10 cm	
Mini guidewire	Spring J Angled 0.035" (0.89 mm) for all items	
Guidewire compatibility	0.035" (0.89 mm) for 4Fr items 0.038" (0.97 mm) for all other items	
Packaging	Pouch	

Item Specifications

Inner diameter	Item reference
4 Fr	RS*B40K10MR
5 Fr	RS*B50N10MRD
6 Fr	RS*B60N10MRD
7 Fr	RS*B70N10MRD
8 Fr	RS*B80N10MRD
9 Fr	RS*B90N10MRD
10 Fr	RS*B10N10MRD
11 Fr	RS*B11N10MRD

Please quote above item reference codes when placing an order

C Kit

General Specifications

Sheath length	10 cm and 25 cm	
Guidewire compatibility	0.025" (0.64 mm), 0.035" (0.89 mm) for 4 Fr and 0.038" (0.97 mm) for all others	
Packaging	Pouch	

Item Specifications

Inner	Guidewire	Sheath	length
diameter	compatibility	10 cm	25 cm
4 Fr	0.025" (0.64 mm)	RS+C40G10NR	_
4 Fr	0.035" (0.89 mm)	RS+C40K10NR	RS+C40K25NR
5 Fr	0.038" (0.97 mm)	RS+C50N10NR	_
6 Fr	0.038" (0.97 mm)	RS+C60N10NR	RS+C60N25NR
7 Fr	0.038" (0.97 mm)	RS+C70N10NR	RS+C70N25NR
8 Fr	0.038" (0.97 mm)	RS+C80N10NR	RS+C80N25NR
9 Fr	0.038" (0.97 mm)	RS*C90N10NR	_
10 Fr	0.038" (0.97 mm)	RS*C10N10NR	_
11 Fr	0.038" (0.97 mm)	RS*C11N10NR	_

Please quote above item reference codes when placing an order



General Specifications

Sheath length	10 cm	
Mini guidewire	Spring, J-type 0.035" (0.89 mm) for 4 Fr and 0.038" (0.97 mm) for all others 45 cm	
Entry needle	Metallic entry needle - 18G x 2 ¾" (1.2 x 70 mm)	
Guidewire compatibility	0.035" (0.89 mm) for 4 Fr and 0.038" (0.97 mm) for all others	
Packaging	Tray	

Item Specifications

Inner diameter	Item reference
4 Fr	RS+R40K10MQ
5 Fr	RS+R50N10MQ
6 Fr	RS+R60N10MQ
7 Fr	RS+R70N10MQ
8 Fr	RS+R80N10MQ
9 Fr	RS+R90N10MQ

RADIFOCUS Introducer II **TRANSRADIAL KIT**



Introducer Sheath


Introducers are intended to be inserted percutaneously into a vessel to facilitate the entire interventional procedure.

Being a pioneer and a leader in vascular access, Terumo's goal is to offer complete solutions for transradial interventions with devices that minimize patient stress and optimize outcomes.

Product Characteristics



- Total Integrated Fit (TIF) tip tapering: optimal tapering design at the tip of the sheath and dilator for smooth penetration
- Cross-cut hemostasis valve: effectively protects against blood reflux and air aspiration
- Thin radiopaque sheath with anti-kinking sleeve: for excellent catheter handling
- Snap-on I click-off dilator lock: prevents dilator back-out during insertion and allows one-hand unlocking

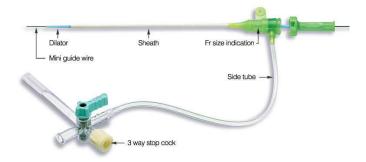



Solution Nr. 1

Radifocus® Introducer II special transradial tapered Introducer Kit

- · Dilator internal tip diameter equals to mini guidewire external diameter
- Micro puncture metallic entry needle with short bevel (22G/21G/20G) equals to mini guidewire to minimize puncture site complications

Available kits

R Kit contains sheath, dilator, spring mini guidewire and metallic entry needle.

General Specifications

Sheath length	7 cm and 10 cm	
Mini guidewire	Spring Straight 0.018" (0.46 mm), 0.021" (0.53 mm) and 0.025" (0.64 mm) 45 cm	
Entry needle	Metallic entry needle - 22G x 1 3/8 (0.7 x 35mm), 21G x 1 3/8 (0.8 x 35mm), 20G x 1 3/8 (0.9 x 35mm)	
Guidewire compatibility	0.018" (0.46 mm), 0.021" (0.53 mm) and 0.025" (0.64 mm)	
Packaging	Tray	

Item Specifications

		Sheath length 7 cm			Sheath length 10 cm	
Inner diameter	Compatible with guidewire					
ulameter	0.018" (0.46 mm)	0.021" (0.53mm)	0.025" (0.64 mm)	0.018" (0.46 mm)	0.021" (0.53 mm)	0.025" (0.64 mm)
4 Fr	RT-R40A07PQ	RT-R40D07PQ*	RT-R40G07PQ	RT-R40A10PQ	RT-R40D10PQ	RT-R40G10PQ
5 Fr	RT-R50A07PQ	_	RT-R50G07PQ	RT-R50A10PQ	RT-R50D10PQ	RT-R50G10PQ
6 Fr	RT-R60A07PQ	_	RT-R60G07PQ	RT-R60A10PQ	RT-R60D10PQ	RT-R60G10PQ
7 Fr	_	_	_	_	RT-R70D10PQ	_



Solution Nr. 2

Radifocus® Introducer II M Coat™, Introducer Kit with hydrophilic M Coating

- Dilator internal tip diameter equals to mini guidewire external diameter
- Retrieving the M Coat[™] sheath requires only half the force compared to conventional uncoated sheaths

Available Kits

- M Coat™ A Kit contains sheath, dilator, plastic mini guidewire and plastic IV catheter (entry needle), 2.5 cc syringe
- M Coat™ R Kit contains sheath, dilator, spring mini guidewire and metallic entry needle



M Coat™ A Kit

General Specifications

Sheath length	10 cm, 16 cm and 25 cm
Sheath coating	Hydrophilic M Coat™
Mini guidewire	Plastic Straight 0.025" (0.64 mm) 45 cm for 10 cm sheath and 80 cm for 16 cm and 25 cm sheath
Entry needle	Plastic IV Catheter - 20G x 1 1/4" (0.9 x 32 mm) , 2.5 ml syringe is included
Guidewire compatibility	0.025" (0.64 mm)
Packaging	Tray

Item Specifications

Inner diameter	Sheath length		
milei diametei	10 cm	16 cm	25 cm
5 Fr	RM*AF5J10SQW	RM*AF5J16SQW	RM*AF5J25SQW
6 Fr	RM*AF6J10SQW	RM*AF6J16SQW	RM*AF6J25SQW

Please quote above item reference codes when placing an order



M Coat™ R Kit

General Specifications

10 cm, 16 cm and 25 cm	
Hydrophilic M Coat™	
Spring Straight 0.021" (0.53 mm) and 0.025" (0.64 mm) 45 cm for 10 cm sheath, 80 cm for 16 cm and 25 cm sheath	
Metallic entry needle 21G x 1 2/5 (0.8 x 36 mm) 20G x 1 2/5 (0.9 x 36 mm)	
0.021" (0.53 mm) and 0.025" (0.64 mm)	
Tray	

Item Specifications

Inner diameter		Sheath length		
	Guidewire compatibility	10 cm	16 cm	25 cm
5 Fr	0.021" (0.53 mm)	RM*RF5F10PQ	RM*RF5F16PQ	RM*RF5F25PQ
5 Fr	0.025" (0.64 mm)	RM*RF5J10PQ	RM*RF5J16PQ	RM*RF5J25PQ
6 Fr	0.021" (0.53 mm)	RM*RF6F10PQ	RM*RF6F16PQ	RM*RF6F25PQ
6 Fr	0.025" (0.64 mm)	RM*RF6J10PQ	RM*RF6J16PQ	RM*RF6J25PQ


RADIFOCUS Introducer | PEDIATRICKIT

Introducer Sheath

Introducers are intended to be inserted percutaneously into a vessel to facilitate the entire interventional procedure.

Product Characteristics

- 0
- Total Integrated Fit (TIF) tip tapering: optimal tapering design at the tip of the sheath and dilator for smooth penetration
- Cross-cut hemostasis valve: effectively protects against blood reflux and air aspiration
- Thin radiopaque sheath with anti-kinking sleeve: for excellent catheter handling
- Snap-on / click-off dilator lock: prevents dilator back-out during insertion and allows one-hand unlocking
- Nitinol super elastic mini guidewire enables smooth insertion and removal

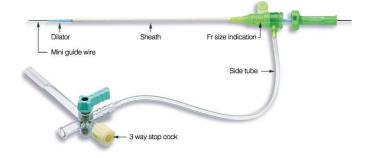

Available Kits

- A Kit contains sheath, dilator, plastic mini guidewire and plastic IV catheter (entry needle), 2.5 cc syringe
- B Kit contains sheath, dilator and plastic mini guidewire



A Kit

General Specifications

Sheath length	5 cm and 7 cm	
Mini guidewire	Plastic Straight 0.025" (0.64 mm) 45 cm	
Guidewire compatibility	0.025" (0.64 mm)	
Entry needle	Plastic IV catheter - 20G x 2" (0.9 x 51 mm), 2.5 ml syringe is included	
Packaging	Tray	

0

B Kit

General Specifications

Sheath length	7 cm
Mini guidewire	Plastic Straight 0.025" (0.64 mm) 45 cm
Guidewire compatibility	0.025" (0.64 mm)
Packaging	Tray

Item Specifications

Inner	Sheath length		
diameter	5 cm	7 cm	
4 Fr	_	RS+A40G07SQ	
5 Fr	RS*A50G05SQ	RS+A50G07SQ	
6 Fr	RS*A60G05SQ	RS+A60G07SQ	

Please quote above item reference codes when placing an order

Item Specifications

Inner diameter	Sheath length	Item reference
4 Fr	7 cm	RS+B40G07SQ
5 Fr	7 cm	RS+B50G07SQ
6 Fr	7 cm	RS+B60G07SQ

RADIFOCUS® OBTURATOR

Introducer Sheath

An obturator supports the wall of the indwelling introducer sheath without a catheter in place.

Product Characteristics

- Snap-on connection to sheath hub
- High flexibility and kink-resistance

- Color coded
- Made of polypropylene with a rounded tip

Item Specifications

•			
Compatible Introducer Sheath size	Length		
	10 cm	25 cm	
4 Fr	XX*RF050410M	_	
5 Fr	XX*RF050510M	XX*RF050525M	
6 Fr	XX*RF050610M	XX*RF050625M	
7 Fr	XX*RF050710M	XX*RF050725M	
8 Fr	XX*RF050810M	XX*RF050825M	
9 Fr	XX*RF050910M	_	

Please quote above item reference codes when placing an order

RADIFOCUS® VESSEL DILATOR

Introducer Sheath



Item Specifications

Outer diameter	Outer diameter Length	Guidewire compatibility		
Outer diameter		0.035" (0.89 mm)	0.038" (0.97 mm)	
4 Fr	15.5 cm	RF*VD40K10M	_	
5 Fr	15.5 cm	RF*VD50K10M	RF*VD50N10M	
6 Fr	15.5 cm	RF*VD60K10M	RF*VD60N10M	
7 Fr	15.5 cm	RF*VD70K10M	RF*VD70N10M	
8 Fr	15.5 cm	RF*VD80K10M	RF*VD80N10M	
9 Fr	15.5 cm	RF*VD90K10M	RF*VD90N10M	
10 Fr	15.5 cm	RF*VD10K10M	_	
11 Fr	15.5 cm	RF*VD11K10M	_	



Certificate

Quality Management System EN ISO 13485:2016

Registration No.:

SX 1485480-1

Organization:

Terumo Corporation 44-1, 2-chome, Hatagaya Shibuya-ku, Tokyo 151-0072 Japan

Scope:

Design and Development, Manufacture, Distribution and Service of

- Angiographic Catheter and Accessories

- Anti-adhesion System

- Balloon Dilatation Catheter

- Blood Collection/Transfusion Device and Accessories

- Blood Glucose Monitoring system

- Cartridge Injection System

- Catheter Introducer and Accessories

- Electronic Sphygmomanometer

- Electronic Thermometer

- Embolization Prosthesis and Accessories

- Extracorporeal Circulation Device and Accessories

- Falloposcopic Tuboplasty Device and Accessories

- Guide Wire and Accessories

- Guiding/Micro Catheter and Accessories

- Infusion Pump

- Infusion Set and Accessories

- Intravascular Imaging Catheter and Accessories

The Certification Body of TÜV Rheinland LGA Products GmbH certifies that the organization has established and applies a quality management system for medical devices.

Proof has been furnished that the requirements specified in the abovementioned standard are fulfilled. The quality management system is subject to yearly surveillance.

Report No.:

150276465-301

Effective date:

2023-08-30

Expiry date:

2026-08-29

Issue date:

2023-07-20



Michiaki Aihara TÜV Rheinland LGA Products GmbH Tillystraße 2 · 90431 Nürnberg · Germany

TÜVRheinland



Certificate

Quality Management System EN ISO 13485:2016

Registration No.:

SX 1485480-1

Organization:

Terumo Corporation 44-1, 2-chome, Hatagaya Shibuya-ku, Tokyo 151-0072 Japan

- Intravascular Imaging System and Accessories
- Intravenous Catheter
- Left-Ventricular Assist System
- Needle
- Open-heart surgery devices and Accessories
- Oral Care Device and Accessories
- Peritoneal Dialysis Device and Accessories
- Pneumatically-powered Massager
- Prefillable Syringe
- Pulse Oximeter
- Radial Artery Hemostasis Device and Accessories
- Stent System
- Syringe
- Syringe Infusion Pump
- Syringe with Needle
- Thrombus Removal Device
- Tube Catheter and Accessories
- Urine test strip
- Vascular Closure Device
- Vascular Inspection/Treatment Kit
- Vascular prosthesis and Accessories
- Wearable Infusion Pump

Report No.:

150276465-301

Effective date:

2023-08-30

Expiry date:

2026-08-29

Issue date:

2023-07-20





Michiaki Aihara TÜV Rheinland LGA Products GmbH Tillystraße 2 · 90431 Nürnberg · Germany



Certificate

Quality Management System EN ISO 13485:2016

Registration No.:

SX 1485480-1

Organization:

Terumo Corporation 44-1, 2-chome, Hatagaya

Shibuya-ku, Tokyo 151-0072 Japan

The scope of certification also covers the following:

No.	Facility	Scope
/01	c/o Terumo Corporation 44-1, 2-chome, Hatagaya Shibuya-ku, Tokyo 151-0072 Japan	Aspects related to Design and Development, Manufacture, Distribution and Service.
/02	c/o Terumo Corporation - Tokyo office 3-20-2, Nishi-Shinjuku Shinjuku-ku, Tokyo 163-1450 Japan	Aspects related to Design and Development and activities related to corporate management processes.
/03	c/o Terumo Corporation, Shonan Center 1500, Inokuchi, Nakai-machi Ashigarakami-gun, Kanagawa 259-0151 Japan	Aspects related to Distribution and activities related to customer communication processes.

Report No.:

150276465-301

Effective date:

2023-08-30

Expiry date:

2026-08-29

Issue date:

2023-07-20





Michiaki Aihara TÜV Rheinland LGA Products GmbH Tillystraße 2 · 90431 Nürnberg · Germany



DECLARATION OF CONFORMITY

We, TERUMO CORPORATION

44-1, 2-chome, Hatagaya, Shibuya-ku, Tokyo 151-0072, Japan

being the manufacturer of:

RADIFOCUS Introducer II

Product: Catheter Introducer

declare that the above products of **Class IIa** are in conformity with the provisions of the EC Council Directive 93/42/EEC of 14 June 1993, as amended, concerning medical devices, and have been subject to the conformity assessment procedure laid down in Article 11, 2 and 11, 3(a) of the Directive, relating to the "Full quality assurance" set out in Annex II, and by certification of Annex II, excluding Section 4 under the supervision of TÜV Rheinland LGA Products GmbH (Registration No.: HD 60145252 0001), Tillystraße 2, 90431 Nürnberg Germany, as Notified Body authorized by the German Competent Authority and carrying the Notified Body No. 0197.

Authorized European Representative:

TERUMO EUROPE N.V. Interleuvenlaan 40, 3001 Leuven, Belgium

Object of the declaration: see Appendix A

Tokyo, July 27, 2023 (place and date of issue)

Toshio Nakashima

General Manager

Quality Assurance Department TERUMO CORPORATION



Appendix A - List of Code Number Structure

		*									
1	2	3	4	5	6	7	8	9	10	11	12

Character	Characters & Meaning										
number											
1, 2	Product name										
	RS: Introducer kit										
	RM: Introducer kit containing hydrophilic polymer-coated sheath.										
3	Destination										
	*: for export										
4	Kit contents										
	A : Sheath, Dilator, Mini guide wire, Syringe, Entry needle										
	(SurfloFlash), Scalpel*1, (Guide inserter*2)										
	B : Sheath, Dilator, Mini guide wire, (Guide inserter*2)										
	C : Sheath, Dilator										
	E : Sheath, Dilator, Mini guide wire, Entry needle (SurfloFlash),										
	(Guide inserter*2)										
	G: Sheath, Dilator, Mini guide wire, Scalpel*1 (Guide inserter*2)										
	H : Dilator										
le .	J : Sheath, Dilator, Scalpel*1										
	K: Sheath, Dilator, Mini guide wire, Syringe, Entry needle (metallic needle), Scalpel*1, (Guide inserter*2)										
	L : Sheath, Dilator, Syringe, Entry needle (SurfloFlash), Scalpel*1										
	M : Sheath, Dilator, Entry needle (SurfloFlash), Scalpel*1										
	N : Sheath, Dilator, Mini guide wire, Syringe, Scalpel*1, (Guide inserter*2)										
	P : Sheath, Dilator, Mini guide wire, Syringe, Entry needle										
E .	(SurfloFlash), (Guide inserter*2)										
	Q : Dilator, Mini guide wire, (Guide inserter*2)										
	R : Sheath, Dilator, Mini guide wire, Entry needle (metallic needle / Metallic Entry Needle										
	improved product), (Guide inserter*2)										
	S : Sheath, Dilator, Mini guide wire, Entry needle (SurfloFlash),										
	Scalpel*1, (Guide inserter*2)										
	W : Mini guide wire										
^	*1: not contained in the export specifications										
	*2: contained when the mini guide wire has an angled tip or a J tip.										



Character					Char	racto	re S	& Meani	na				
number					Спа	acte	150	x ivicani	ng				
5-6	Sheath Size (w/o hydrophilic polymer coating) Characters: 40 50 55 60 65 70 75 80 85 90 10 11 00												
	Size:	4.0 5.0	0 5.5	6.0 6	.5 7.0	7.5 8					no shea	ıth	
	Sheath Size				ymer coa	ting)							
	Characters: Size:	F4 F 4.0 5.		6 F7 0 7.0									
7	Mini guide				Size of	Enrt	v n	eedle (le	nøth	of proi	ecting	portion of a	dilator i
·	25mm)	25mm)											
	Standard Type (the items with their product code starting with RS*)												
	Mini guide wire diameter/ Dilator inner diameter Type of Surflo												
					0.018"	0.02	1"	0.025"	0.03	35" (0.038"	Type of S	uriio
				b-type	A	D		G	K		N		
		Type		a-type	В	Е		Н	L		P	Standa	rd
		scalpel tray	- 1	b-type	С	F		J	M		Q		
		пау		a-type	V	W	7	X	Y		Ž	With ada	pter
		Entry	needl	e size	22G×	22G		20G×	18G				
			necai	0 3120	1"	1" 1"		2"	2 1/		2 1/2"		
		metalli	c need	lle size					18G 2 3/				
	*Kit contain	ning a hy	dropl	nilic pol	ymer-coa	ited s	hea	th (the it				luct code st	arting
	with RM*):												
					ide wire		ete			er dia: 0.035		Type	
	<u> </u>	1	0.0		0.021"			0.025"				8" Surf	10
	Type of	b-type	F	A .	D E			G H		K	N		anter
	scalpel	a-type	E	3						L P M Q		111111111111111111111111111111111111111	apter
	and tray	b-type	(2	F		J		Stand			ord	
		a-type	V		W		X		Y	Z	Stand	aru	
	Entry r		22G	×1"	22G×	1"	20G×2"		18G× 2 1/2'				
	metallic siz				Metallic Entry Needle improved product 21G×1 2/5"		Metallic Entry Needle improved product 20G×1 2/5"		18G× 2 3/4'				



Character number	Characters & Meaning							
8-9	Length of sheath							
	05 ~: 50 mm ~							
10	Type of mini guide wire							
	A: Plastic, Angled							
	B: Plastic, Angled, 4mm of tip cut							
	E: Straight E							
	F: Flex, Angled							
	H: Short tapered, short angle							
	J: Plastic, 3mm J							
	K: Stiff, Angled							
	M: Spring, J							
	N: No mini guide wire contained.							
	P: Spring, Straight							
	S: Plastic, Straight							
	V: Plastic, 1.5mm J-angle							
	Y: Flex, Straight							
11	Packaging							
	Q: Tray package (Multi-language)							
	R: Pouch package (Multi-language)							
12	Reserved							
	1: With scalpel.							
	5: Inner diameter of dilator at distal end: 0.038",							
	Outer diameter of mini guide wire: 0.035"							
	Z: Entry needle: $20Gx2"\rightarrow 20Gx1 1/4"$							
	Length of mini guide wire: 80cm→45cm, scalpel contained.							
8	W: Entry needle: 20Gx2"→20Gx1 1/4", scalpel contained.							



Append	lix A	List	of C	ode	N	umb	er S	Stru	ictui	e						
] [П	П					
1	2 3	4	5	6	7		3	9	10	11	12					
Character number							(Cha	racte	rs &	Meaning					
1, 2	Product r RS: Int RM: In	roduce		conta	inin	ng hvo	droph	nilic	polvi	ner-c	oated shea	ıth				
3	Destinati	on									ing Japan					
4	A: in B C R *1:1	C : Sheath, Dilator														
5-6	Sheath Size (Fr) (w/o hydrophilic polymer coating) Characters 40 50 60 70 80 Size 4.0 5.0 6.0 7.0 8.0 Sheath Size (Fr) (with hydrophilic polymer coating) Characters F5 F6 Size 5.0 6.0															
7	Type of scalpel and tray G F J M Entry needle size 20G×2"								ator inner 38" 6G×2 1/2" 8G×2 3/4" their produce diameter 0.035" M	Type Surflo Standa ct code Typ With	of ard	ng with				
	Metallic needle size					Metallic Entry Needle improved product 21G×1 2/5"					letallic Entedle impro product 1G×1 2/5	ved				
8-9	Length of 00 :	sheath no she														



	05~ : 50mm~ ~
10	Type of mini guide wire A: Plastic, Angled M: Spring, J N: No mini guide wire contained. P: Spring, Straight S: Plastic, Straight H: Short tapered, short angle
11	Packaging Q: Tray package (Multi-language #, Chinese) R: Pouch package (Multi-language #, Chinese)
12	Reserved 1: With scalpel. 5: Inner diameter of dilator at distal end: 0.038", Outer diameter of mini guide wire: 0.035" Z: Entry needle: 20Gx2"→20Gx1 1/4" Length of mini guide wire: 80cm→45cm, scalpel contained. W: Entry needle: 20Gx2" →20Gx1 1/4", scalpel contained.



EC Certificate

Directive 93/42/EEC Annex II, excluding Section 4 Full Quality Assurance System Medical Devices

Registration No.: HD 60145252 0001

Report No.: 12031336 018

Manufacturer: Terumo Corporation

44-1, 2-chome, Hatagaya

Shibuya-Ku, Tokyo 151-0072 Japan

Products: see att

see attachement for products included

Replaces Approval, Registration No.: HD 60121893 0001

Expiry Date: 2024-05-26

The Notified Body hereby declares that the requirements of Annex II, excluding section 4 of the directive 93/42/EEC have been met for the listed products. The above named manufacturer has established and applies a quality assurance system, which is subject to periodic surveillance, defined by Annex II, section 5 of the aforementioned directive. For placing on the market of class III devices covered by this certificate an EC design-examination certificate according to Annex II, section 4 is required.

Effective Date: 2019-12-23

Date: 2019-12-23

Prifizierung 55

Notified Body

M.Sc. M. Aihara

TÜV Rheinland LGA Products GmbH - Tillystraße 2 - 90431 Nürnberg
TÜV Rheinland LGA Products GmbH is a Notified Body according to Directive 93/42/EEC
concerning medical devices with the identification number 0197.

TÜVRheinlan



Doc. 1/2, Rev.1

TÜV Rheinland LGA Products GmbH Tillystraße 2, 90431 Nürnberg

Attachment to Certificate

Registration No.: Report No.:

HD 60145252 0001

12031336 023

Manufacturer:

Terumo Corporation 44-1, 2-chome, Hatagaya

Shibuya-ku, Tokyo 151-0072 Japan

Products included:

- Blood Bags
- Blood Donor Set with/without Blood Transfusion Filter
- Blood Transfusion Filter
- Intravenous Catheter
- Intravenous Administration Set
- Hypodermic Syringe
- Winged Needle
- Dental Needle
- Other Medical Needle
- Blood Administration Set
- Lancet

Notified Body

M.Sc. M. Aihara

TÜVRheinland

Date: 2020-10-23



Doc. 2/2, Rev.1

TÜV Rheinland LGA Products GmbH Tillystraße 2, 90431 Nürnberg

Attachment to Certificate

Registration No.: F

HD 60145252 0001

Report No.:

12031336 023

Manufacturer:

Terumo Corporation 44-1, 2-chome, Hatagaya Shibuya-ku, Tokyo 151-0072 Japan

Products included:

- Extra-corporeal Membrane Oxygenator
- Cardiopulmonary Bypass Arterial Line Blood Filter
- Heart-Lung Bypass Defoamer
- Cardiotomy Reservoir
- Cardiopulmonary Bypass Blood Reservoir
- Haemoconcentration Filter
- Centrifugal Pump
- Angiographic Catheter
- Balloon Dilatation Catheter
- Catheter Guide Wire
- Guiding Catheter
- Catheter Introducer
- Stents
- Extension Tube
- Temperature Control Unit for Heart-Lung Bypass System Module
- Infusion Pump
- Syringe Infusion Pump
- Clinical Electronic Thermometer
- Portable insulin infusion pump
- Portable insulin infusion administration set

Notified Body

M.Sc. M. Aihara

TÜVRheinla

Date: 2020-10-23