


MICRO MARTIN Smooth Tool-less Eco
MRUSTE 048 740 L05 AA016 CBR NH1

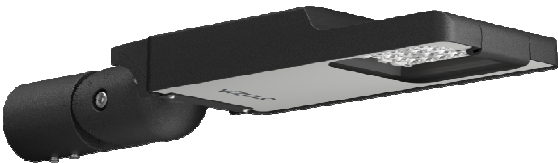

CE   RoHS

Color  RAL 9005

Electrical	Input power	48 W
	Input voltage	220 - 240 V
	Frequency	50 - 60 Hz
	Power factor	0.97
Optical	Optic name	L05
	Optic type	TYPE-III
	Luminous flux	6867 lm ±10%
	Luminous efficacy	143 lm/W
	Performance temperature Tq	+25 °C
	Color rendering index	>70
	Color temperature	4000 K
	Color tolerance	5 SDCM
	ULOR	0
	LED quantity	16
Lifetime	Lumen depreciation	L90 after 100 000 h
	Warranty	5 years
	Ambient temperature range	-40 ... +50 °C
Protection	Protection class	Class I
	Surge protection L-N	At least 10 kV
	Surge protection L/N-PE	At least 10 kV
	Ingress protection	IP66
	Impact resistance	IK08
	Increased corrosion	Powder coating

resistance

Housing

Body material	Die-cast aluminium
Cover material	Flat tempered glass
Optic material	PMMA
Color	RAL 9005 (jet black)
Dimensions	632 x 170 x 90 mm
Max wind load area SCd	0.04 m ²
Mounting	Post top / side-entry, $\pm 90^\circ$, 60 mm
LED module replaceability	Replaceable by a professional
Driver replaceability	Replaceable by a professional
Accessibility of electronic components	Tool-less


Controls

Dimming	No dimming
---------	------------


Approvals

CE	Yes
ENEC	Yes
ENEC+	Yes
RoHS	Yes

Light distribution

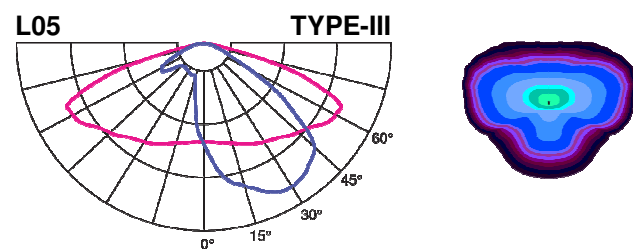

Dimensions

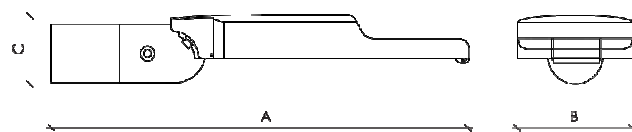

Product images



