



# 山东海迪科医用制品有限公司 SHANDONG HAIDIKE MEDICAL PRODUCTS CO.,LTD.

Add: Plant No. 1, Science and Technology Enterprise Incubator Park, Shan County, Heze City, Shandong Province, China

Tel: +86-530-4660062 Fax: +86-530-4660055 Mobile: +86-13105409308 E-mail: info@suturescn.com Web: www.suturescn.com



### SHANDONG HAIDIKE MEDICAL PRODUCTS CO.,LTD.

山东海迪科医用制品有限公司

RT®ED

### INTRODUCTION

# C€ FD∕A ISO NMPA FSC



- Absorbable surgical sutures approved by CE certificate
- NO.1 catgut suture plant in the world
- Lifting Threads for Beauty, Cosmetic
  Orthopedic casting tapes & splints

营业执照

- Medical protection products • Electric Wheelchair & Manual Wheelchair • Pet Food, Vet Suture





















RT D

02

RT ŒD ED®

# PGA POLYGLYCOLIC ACID

### Properties:

Structure: Multifilament, Braided

Colour: Violet , Undyed

Chemical composition: Polyglycolic acid Coating: Polycaprolactone + Calcium Stearate

Sizes: USP 8/0 - USP 4 Type of absorption: Hydrolysis Sterilization: Ethylene Oxide

### Advantages:

- · High initial tensile strength
- · Excellent knotting ability

Absorption: 60 - 90 days

- · Reliable absorbability
- · Easy to handle
- · Outstanding holding power through the critical wound periode
- · Smooth surface, slides smoothly through the tissue

# PGLA POLYGLACTIN 910

#### Properties:

Structure: Multifilament, Braided Colour: Violet , Undved

Chemical composition: Poly(glycolide-co-l-lactide 90/10) Coating: Poly(glycolide-co-l-lactide 30/70) + Calcium Stearate

Sizes: USP 8/0 - USP 2

Type of absorption: Hydrolysis Sterilization: Ethylene Oxide Absorption: 56 - 70 days

#### Advantages:

- · High tensile strength
- · Smooth tissue passage
- · Easy knotting and tie down
- · Excellent knot security
- · Reliable absorbability





WWW.HDKSUTURE.COM

# PDO POLYDIOXANONE

### Properties:

Structure: Monofilament Colour: Violet, Undved

Chemical composition: Poly (p-dioxanone)

Sizes: USP 7/0 - USP 2

Type of absorption: Hydrolysis Sterilization: Ethylene Oxide Absorption: 180 - 210 days

# Service

### Advantages:

- · High initial tensile strength
- Prolonged wound support
- · Minimal tissue reaction
- · Lower incidence of infection and trauma due to smooth surface

# PGCL POLIGLECAPRONE 25

### Properties:

Structure: Monofilament Colour: Violet, Undyed

Chemical composition: Poly (glyclolide-co-caprolactone)

Sizes: USP 6/0 - USP 2

Type of absorption: Hydrolysis Sterilization: Ethylene Oxide

Absorption: 90 - 120 days



### Advantages:

- · High initial tensile strength
- Easy handling
- · Smooth passage through tissue
- · Excellent knotting ability

WWW.SUTURESCN.COM





03







# SILK

### Properties:

Structure: Braided Colour: Black, White Composition: Natural silk filaments

Coating: Silicon / wax Sizes: USP 8/0 - USP 4 Sterilization: Ethylene Oxide



### Advantages:

- · Excellent handling properties
- · High tensile strength
- · Highly smooth and flexible
- · Good knot security

### **POLYPROPYLENE**

### Properties:

Structure: Monofilament Colour: Blue

Chemical composition: Polypropylene Sizes: USP 7/0 - USP 3 Sterilization: Ethylene Oxide

### Advantages:

- · High tensile strength
- · Smooth tissue passage
- · Easy and secure knotting
- Minimal acute inflammatory reaction in tissues
- · Excellent and permanent tissue support

### CHROMIC CATGUT

### Properties:

Colour: Dark brown Composition: Purified connective tissue Sizes: USP 7/0 - USP 4

Type of absorption: Proteolysis Sterilization: Gamma radiation Absorption: 90 - 100 days



### Advantages:

- · High tensile strength
- · Excellent handling properties
- · Minimal tissue reaction
- Uniform absorption

# **PLAIN CATGUT**

### Properties:

Colour: Beige

Composition: Purified connective tissue

Sizes: USP 7/0 - USP 4

Type of absorption: Proteolysis Sterilization: Gamma radiation

Absorption: 60 - 70 days

### Advantages:

- · High tensile strength
- · Smooth tissue passage
- · Easy knotting and tie down
- · Excellent knot security
- · Reliable absorbability



WWW.HDKSUTURE.COM









#### SUTURE CODES

NEEDLES

### NYLON

### Properties:

Structure: Monofilament Colour: Blue, Black

Chemical composition: polyamide 6 - 6.6

Sizes: USP 12/0 - USP 4 Sterilization: Ethylene Oxide



### Advantages:

- · High tensile strength
- · Smooth tissue passage
- · Easy and secure knotting
- · Excellent and permanent tissue support

# **POLYESTER**

#### Properties:

Structure: Braided Colour: Green, White Chemical composition: Polyethylene terephthalate Coating: Silicon Sizes: USP 6/0 - USP 4

Sterilization: Ethylene Oxide



### Advantages:

07

- · High tensile strength
- · Excellent handling properties Minimal tissue reaction Good knot security





#### THREADS THREADS **THREADS** THREADS TYPE DIAMETER LENGTH POLYGLYCOLIC ACID 10/0 (size: 5-8/0) POLYGLYCOLIC ACID RAPID

3

200cm

(size: 5-8/0) POLYGLYCOLIC ACID PLUS (size: 5-8/0) POLYGLACTIN 910 (size: 2-8/0)

POLYGLYGLACTIN 910 RAPID (size: 2-8/0) POLYGLYGLACTIN 910 PLUS (size: 2-8/0)

POLYDIOXANONE (size: 2-7/0) POLYDIOXANONE RAPID

(size: 2-7/0) POLYDIOXANONE PLUS (size: 2-7/0) CHROMIC CATGUT (size: 4-7/0)

PLAIN CATGUT (size: 4-7/0) POLIGLECAPRONE 25

(size: 2-6/0) POLIGLECAPRONE 25 RAPID (size: 2-6/0)

POLIGLECAPRONE 25 PLUS (size: 2-6/0)

SILK (size: 4-6/0) NYLON (size: 4-12/0) POLYPROPYLENE (size: 3-7/0)

> POLYESTER (size: 4-7/0)

 1/2 circle round bodied 9/0 3/8 circle round bodied 30cm 8/0 ▲ 1/2 circle 03 45cm curved cutting 7/0 3/8 circle
 curved cutting 60cm 6/0 ▼ 1/2 circle reverse cutting 05 70cm 5/0 3/8 circle reverse cutting 75cm 4/0 straight round bodied 90cm 3/0 straight curved cutting 100cm 2/0 1/2 circle taper cutting 0 125cm O 3/8 circle taper cutting 1 150cm • blunt point 2 180cm ■ 1/2 circle 12

> 3/8 circle spatula curved 13 250cm ● 1/4 circle round bodied 300cm round bodied heavy 400cm without needle double needle 50cm

spatula curved

PGA20F0126-2

# **Lifting Threads Needle**

Basic type, generally used for linear filling and simple lifting, Beginners can also operate effortlessly.

TYPE L type blunt needle, reduce the damage of blood vessels, bruising and hematoma. The pain was significantly reduced.

Circular head, reducing the damage to the skin tissue. After the injection, the needle can be taken out then correct the position and depth of the needle, which improves the lack of a stitch of the

Double needle is used for eyebrow lifting and other parts requiring strong lifting. U-COG is a special structure line with strong lifting ability.

The local lifting effect is almost as good as the little

# **PDO/PCL Lifting Thread**



#### Mono

Needle Sharp Needle

Parts Face, Body Effects Tightening, Filling, Wrinkles Removing, Whitening



#### Tornado Screw

edle Sharp Needle

arts Eye, Neck, Crow's Feet, Cheek Tightening, Filling, Whitening,





### KONK

Needle L type Blunt Needle

Parts Nasal columella, Nasal bridge Effects Rhinoplasty, Nose Shaping



### COG Lifting

Needle L/W type Blunt Needle

Parts Lifting Eyebrow, Apple Zone, Cheek, Chest Effects Face Lifting, V Face, Chest Lifting



#### Multi Threads

Needle L type Blunt Needle

Parts Face, Neck, Eye Bag, Crow's Feet Effects Tightening, Filling, Whitening, Wrinkles Removing



#### Molding COG

Needle W tpye Blunt Needle

Face, Neck, Crow's Feet, Eye Bag

Effects Tightening, Filling, Whitening, Wrinkles Removing

### Forehead

Multi Threads / Tornado Screw / Mono Screw

### Crow's feet / Eye bags / Eye Corner's Lifting

Blunt Needle For Eye 30G-25mm

### Apple Zone

Multi Threads / Tornado Screw / Mono Screw

### Nasolabial folds / Mouth Corner's Lifting

Multi Threads / Tornado Screw / Mono Screw





#### Face Lifting

18G-100mm / 19G-100mm

#### Nose Dorsum / Nose Bridge 19G-60mm

Nose Columella 19G-38mm

Cervical Stripe / Neck Lifting

23G-38mm / 18G-100mm



# **Medical Cooling Gel Patch**



# **Hyaluronic Acid Hydrating Mask**







WWW.HDKSUTURE.COM

# **Peptide Repair Lyophilized Powder**

Pour bottle (2) of liquid into bottle (1).



# **Skin Care Products**





| Mild Cleaning Foam                      | 150mL |
|---|-------|
| Soothing Moisturizing Toner             | 120mL |
| Moisturizing Repairing Lotion           | 100mL |
| Brightening Recovery Essence            | 40mL  |
| Multi-effect Nourishing Repairing Cream | 509   |

# Hernia Repair Mesh



Promotes liquid circulation and smoothes tissue growth.


### Less micropores

Greatly reduces the possibility of bacteria hiding and is not easy to infect.


### Light weight

Reduce postoperative pain and foreign body sensation.

Hernia Example



After Mesh Repair




# **Disposable Surgical Face Masks**





| 3 Ply Flat type      | Ear Loop EN 14683:2019 Type IIR 🔬   |  |  |
|----------------------|---|--|--|
| Name                 | Parameter   |  |  |
| Size                 | 17.5 cm x 9.5 cm  |  |  |
| Material             | Polypropylene spunbond nonwoven fabric, polypropylene melt- blown nonwoven, metal wire with plastic covering nose clip, polyester/nylon spandex blend ear loops   |  |  |
| Product performance: | The bacterial filtration efficiency of the mask should be not less than 98%.  |  |  |
| Application          | It is worn by clinical staff during non-invasive procedures, covering the user's mouth, nose, and jaw, providing a certain physical barrier to prevent direct penetration of pathogenic microorganisms, particulate matter, in patients, etc. |  |  |
| Expiration date      | 2 years after production  |  |  |
| Storage              | Store at room temperature, the relative humidity should not exceed 80%, non-corrosive gas and well-ventilated   |  |  |





| 3 Ply Flat type     | Ear Loop  | EN 14683:2019  | Type IIR                   | NON    |
|---------------------|---|--|----------------------------|--------|
| Name                | Parameter   |  |                            |        |
| Size                | 14.5 cm x 9.5 cm  |  |                            |        |
| Material            |   | nwoven fabric, polypropylene melt- blown no<br>r/nylon spandex blend ear loops | onwoven, metal wire with p | lastic |
| Product performance | The bacterial filtration efficiency of the mask should be not less than 98%.  |  |                            |        |
| Application         | It is worn by clinical staff during non-invasive procedures, covering the user's mouth, nose, and jaw, providing a certain physical barrier to prevent direct penetration of pathogenic microorganisms, particulate matter, in patients, etc. |  |                            |        |
| Expiration date     | 2 years after production  |  |                            |        |
| Storage             | Store at room temperature, the relative humidity should not exceed 80%, non-corrosive gas and well-ventilated room. Transportation means should be clean and isolated from fire sources.  |  |                            |        |

WWW.HDKSUTURE.COM WWW.SUTURESCN.COM

# **Disposable Medical Face Mask**





| 3 Ply Flat type      | Ear Loop  | EN 14683:2019  | Type I                  | NON        |
|----------------------|---|--|-------------------------|------------|
| Name                 | Parameter   |  |                         |            |
| Size                 | 17.5 cm x 9.5 cm  |  |                         |            |
| Material             |   | nwoven fabric, polypropylene melt- blown no<br>r/nylon spandex blend ear loops | onwoven, metal wire wit | th plastic |
| Product performance: | The bacterial filtration efficiency of the mask should be not less than 95%.  |  |                         |            |
| Application          | It is worn by clinical staff during non-invasive procedures, covering the user's mouth, nose, and jaw, providing a certain physical barrier to prevent direct penetration of pathogenic microorganisms, particulate matter, in patients, etc. |  |                         |            |
| Expiration date      | 2 years after production  |  |                         |            |
| Storage              | Store at room temperature, the relative humidity should not exceed 80%, non-corrosive gas and well-ventilated room. Transportation means should be clean and isolated from fire sources.  |  |                         |            |



| 3 Ply Flat type      | Ear Loop EN 14683:2019 Type IIR   |  |
|----------------------|---|--|
| Name                 | Parameter   |  |
| Size                 | 17.5 cm x 9.5 cm  |  |
| Material             | Polypropylene spunbond nonwoven fabric, polypropylene melt- blown nonwoven, metal wire with plastic<br>covering nose clip, polyester/nylon spandex blend ear loops  |  |
| Product performance: | The bacterial filtration efficiency of the mask should be not less than 98%.  |  |
| Application          | It is worn by clinical staff during non-invasive procedures, covering the user's mouth, nose, and jaw, providing a certain physical barrier to prevent direct penetration of pathogenic microorganisms, particulate matter, in patients, etc. |  |
| Expiration date      | 2 years after production  |  |
| Storage              | Store at room temperature, the relative humidity should not exceed 80%, non-corrosive gas and well-ventilated room. Transportation means should be clean and isolated from fire sources.  |  |







| 3 Ply Flat type      | Ear Loop EN 14683:2019 Type I   |  |
|----------------------|---|--|
| Name                 | Parameter   |  |
| Size                 | 14.5 cm x 9.5 cm  |  |
| Material             | Polypropylene spunbond nonwoven fabric, polypropylene melt- blown nonwoven, metal wire with plastic<br>covering nose clip, polyester/nylon spandex blend ear loops  |  |
| Product performance: | The bacterial filtration efficiency of the mask should be not less than 95%.  |  |
| Application          | It is worn by clinical staff during non-invasive procedures, covering the user's mouth, nose, and jaw, providing a certain physical barrier to prevent direct penetration of pathogenic microorganisms, particulate matter, in patients, etc. |  |
| Expiration date      | 2 years after production  |  |
| Storage              | Store at room temperature, the relative humidity should not exceed 80%, non-corrosive gas and well-ventilated   |  |



| 5 Ply Foldin         | g type       | EN 14683:2019   | Type IIR                         | NON                     |
|----------------------|--------------|---|----------------------------------|-------------------------|
| Name                 | Param        | eter  |                                  |                         |
| Size                 | 11.5 cm x 1  | 5 cm  |                                  |                         |
| Material             |              | lene spunbond nonwoven fabric, polyprop<br>lend ear loops   | oylene melt- blown nonwoven, nos | e clip, polyester/nylon |
| Product performance: | The bacteri  | ial filtration efficiency of the mask should be   | e not less than 98%.             |                         |
| Application          |              | oy clinical staff during non-invasive procedu<br>sical barrier to prevent direct penetration of p |                                  |                         |
| Expiration date      | 2 years afte | er production   |                                  |                         |
| Storage              |              | om temperature, the relative humidity shoul<br>sportation means should be clean and isola         |                                  | as and well-ventilated  |

WWW.HDKSUTURE.COM

RT DED PACE MASK

# **Medical Goggle**



□White □Black □Transparent □Large □Medium □Small Model specifications

Product description It is composed of a protective cover made of polymer material, a foam strip and a fixing device. Non-sterile, single use.

Expiration date 3 years after production

This product should be stored in a dry, ventilated, non-corrosive gas warehouse. Storage

# 3 Ply Cup type Head Loop EN14683:2019 Type IIR

|                      | SIENCE  |
|----------------------|---|
| Name                 | Parameter   |
| Size                 | 13.5 cm x 13.5 cm   |
| Material             | Polypropylene spunbond nonwoven fabric, polypropylene melt- blown nonwoven, nose clip, polyester/nylon spandex blend ear loops  |
| Product performance: | The bacterial filtration efficiency of the mask should be not less than 98%.  |
| Application          | It is worn by clinical staff during non-invasive procedures, covering the user's mouth, nose, and jaw, providing a certain physical barrier to prevent direct penetration of pathogenic microorganisms, particulate matter, in patients, etc. |
| Expiration date      | 2 years after production  |
| Storage              | Store at room temperature, the relative humidity should not exceed 80%, non-corrosive gas and well-ventilated room. Transportation means should be clean and isolated from fire sources.  |



#### 5 Ply Folding type Head Loop N95-V1 STERILE EO

| Name                 | Parameter  |
|----------------------|--|
| Size                 | 11.5 cm x 15 cm  |
| Material             | Polypropylene spunbond nonwoven fabric, polypropylene melt- blown nonwoven, nose clip, polyester/nylon<br>spandex blend ear loops  |
| Product performance: | The bacterial filtration efficiency of the mask should be not less than 95%.   |
| Application          | It is worn by clinical staff during non-invasive procedures, covering the user's mouth, nose, and jaw, providing a<br>certain physical barrier to prevent direct penetration of pathogenic microorganisms, particulate matter, in patients,etc |
| Expiration date      | 11 months after production   |
| Storage              | Store at room temperature, the relative humidity should not exceed 80%, non-corrosive gas and well-ventilated  |

WWW.HDKSUTURE.COM

# **Medical Isolation Mask**





| Model: Ear hoo      | k type / Headband type  | EN166:2001<br>EN167:2002       | NON                |
|---------------------|---|--------------------------------|--------------------|
| Product description | It is composed of a protective cover made of pol Non-sterile, single use. | ymer material, a foam strip an | d a fixing device. |
| Expiration date     | 3 years after production  |                                |                    |
| Storage             | This product should be stored in a dry, ventilated                        | d, non-corrosive gas warehous  | se.                |

# **Isolation Gown**



Medical Protection Products

### **Isolation Gown - TYPE A**



Isolation gowns - type A Specifications: 120cm×120cm Material 100% Non-woven fabric Non-woven fabrics are usually used as the main raw materials, which are made by cutting and sewing. Non-sterile, single-use. Product description **Expiration date** 3 years after production

Storage This product should be stored in a dry, ventilated, non-corrosive gas warehouse.

# **Isolation Gown**




### **Isolation Gown - TYPE B**



| Isolation gowns - type B | Specifications: One-size-fits-all  |
|--------------------------|--|
| Material                 | 100% Non-woven fabric  |
| Product description      | Non-woven fabrics are usually used as the main raw materials, which are made by cutting and sewing. Non-sterile, single-use. |
| Expiration date          | 3 years after production   |
| Storage                  | This product should be stored in a dry, ventilated, non-corrosive gas warehouse.   |

WWW.HDKSUTURE.COM

# **Medical Disposable Protective Clothing**

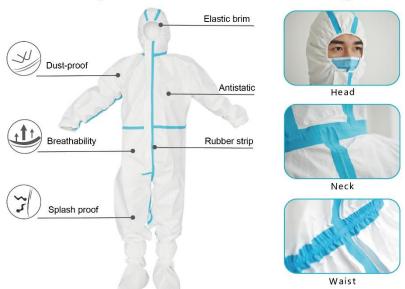

### Executive Standard: GB 19082-2009 EN 14126:2003



Specifications: One-piece Sizes: 0 160 0 165 0 170 0 175 0 180 0 185

#### Raw materials of Components:

| Items No. | Components   | Raw materials   |
|-----------|--------------|---|
| 1         | Fabrics      | PP+PE (Polypropylene + polyethylene breathable membrane) composite material |
| 2         | Rubber strip | EVA low temperature glue, polymer basic cloth                               |

Intended use: It is used to provide barrier and protection for the potentially infectious patients' blood, body fluids, secretions, etc. that clinical medical personnel come into contact with at work. It cannot be used to isolate places with strict microbiological index control requirements such as intensive care unit (room).

2 years after production **Expiration date** 

Storage: Store at room temperature, in non-corrosive gas, dry, avoid the sunlight, good ventilation, clean enviro-

# **Surgical Gowns**





WWW.SUTURESCN.COM WWW.HDKSUTURE.COM

Medical Protection Products Medical Protection Products

### **Medical Isolation Shoe Cover**



#### size: Long Short Style: Non-woven fabric PVC PP+PE

Product description Made of suitable materials, with sufficient strength and barrier properties. Non sterile.

**Expiration date** 3 years after production

Store in an environment with relative humidity not exceeding 80%, no corrosive gas, cool, Storage

dry, well ventilated and clean.

Long-style / Short-style Blue / White FZ/T64005-2011 Medical isolation shoe cover

# **Medical Cap**

Model specifications Round cap. φ25.5cm FZ/T64005-2011

Product description Non-woven fabric is usually used as the main raw material, which is made

by cutting and sewing. Non-sterile, single-use.

□Non-woven fabric □PP+PE Material

Blue

This product should be stored in a dry, Storage ventilated, non-corrosive gas warehouse.

# **Medical Scrubs Uniforms**



### Model: type A: split type; type B: gown type.



**Specifications** oS oM oL oXL oXXL

Usually made of cotton fiber or non-woven fabric. The medical scrubs uniforms is short-sleeve or long-sleeve style that have the function of blocking dandruff, and do not have liquid barrier properties. It is non-sterile supply and can be reused. It should be sterilized before using. **Product Description** 

**Expiration date** 

The product should be stored in a clean warehouse without corrosive gas, well ventilated, cool and dry. Storage

WWW.HDKSUTURE.COM WWW.SUTURESCN.COM

### **Medical Bed Sheet**





### Materials: 70% Polypropylene, 30% Polyethylene non-woven fabric

| Product description | It is made by compounding or sewing non-woven fabric and plastic film. Non-sterile, single use. |
|---------------------|---|
| Expiration date     | 3 years after production  |
| Storage             | This product should be stored in a dry ventilated, non-corrosive gas warehouse                  |









WWW.HDKSUTURE.COM

# **Disposable Virus Specimen Collection Tube**



### Model: Inactivated and non-inactivated



Product description Disposable virus specimen collection tube is composed of swabs and/or collection cups and tubes containing storage solution. Non-sterile.

**Expiration date** 

The product should be stored in a non-corrosive gas and well-ventilated warehouse at room Storage

### **Medical examination gloves**



ion:)According to the different materials used, it is divided into: polyvinyl chloride, butyronitrile; according to the size, it is divided into: XS, S, M, L, XL.

duct Description) Usually made of materials such as polyvinyl chloride. Have sufficient strength and barrier properties. Non-sterile supply, single use.

Intended use: It will be wore by doctor to do checking for the patients or lab testing.

### Medical rubber gloves



Model/Specification: XS. S. M. L. XL.

Product Description: Usually made of materials such as polyvinyl chloride and rubber. Have sufficient strength and barrier properties. Non-sterile supply, single use.

Intended use: It will be wore by doctor to do checking for the patients or lab testing.

# **Orthopedic Casting Tape**



#### **USE INSTRUCTION**

- Apply 1~2 layers stockinet over the affected body part;
- Wear surgical gloves;
- Choose proper size orthopedic casting tape, then open the package;
   Immerse the casting tape in normal temperature(20°C~30°C) water for 5~6 seconds and squeeze 2~3 times. Then remove from the water and squeeze out the excess water. The curing time of orthopedic casting tape is directly related to the temperature of water. The curing time is shorter in high temperature water than in low temperature water. If the water temperature is over 27°C, the curing time is too short to increase the difficulty of the operation.
- Wrap the casting tape spirally around the affected body part, overlapping the previous layer by one-half or two-thirds the width of the tape. The tension is moderate. If it is too loose, it will weaken the adhesion of the orthopedic casting tape. If it is too tight, it will affect the blood circulation.
- The intensity of the casting tape is related to the number of overlapped layers. Overlap 3~4 layers for the non-weight bearing parts, while overlap 5~6 layers for the weight bearing parts. If more layers are needed, please ensure the adhesivity between the layers.
- To increase the adhesion between layers, the casting tape will be shaped after wrapped. The operating time should be in 3~5 minutes. The adhesion and shaping effect cannot reach the best if the operating time is longer or the immersed time is too long. The patients do not allow to move freely in 10 minutes before the orthopedic casting tape are completely hardened.
- The electric plaster saw is needed if the affected parts need to open a window or remove the orthopedic casting tape.

|                                    | Orthopedic Casting Tape |                    |                           |                  |
|------------------------------------|-------------------------|--------------------|---------------------------|------------------|
| Product Description                | Sizes                   | Specification(W×L) | Packaging                 | Operating Part   |
| Fiberglass Orthopedic Casting Tape | RT002                   | 5.0cm × 360cm      | 10bags/box<br>12boxes/ctn | Wrists/Childrens |
| Fiberglass Orthopedic Casting Tape | RT003                   | 7.5cm × 360cm      | 10bags/box<br>12boxes/ctn | Arms             |
| Fiberglass Orthopedic Casting Tape | RT004                   | 10.0cm × 360cm     | 10bags/box<br>12boxes/ctn | Arms / Legs      |
| Fiberglass Orthopedic Casting Tape | RT005                   | 12.5cm × 360cm     | 10bags/box<br>9boxes/ctn  | Legs             |
| Fiberglass Orthopedic Casting Tape | RT006                   | 15.0cm × 360cm     | 10bags/box<br>9boxes/ctn  | Legs             |

# **Polymer Splint**







Thumb Fixation Recommended sizes: 312 (7.5cmX30cm) 415 (10cmX40cm)



Recommended sizes: 312 (7.5cmX30cm) 415 (10cmX40cm)



The Fourth and Fifth Finger Fixation Elbow Fixation Recommended sizes: 312 (7.5cmX30cm) 415 (10cmX40cm)



Forearm Fixation Recommended sizes: 335 (7.5cmX90cm) 430 (10cmX75cm)



Horseshoe Fixation Recommended sizes: 335 (7.5cmX90cm) 430 (10cmX75cm)



Ankle Fixation Recommended sizes: 430 (10cmX75cm) 530 (12.5cmX75cm)



Legs Fixation Recommended sizes: 335 (7.5cmX90cm) 545 (12.5cmX115cm)

|                        | Polymer splint           |                          |                  |
|------------------------|--------------------------|--------------------------|------------------|
| Product Description    | Sizes Specification(WxL) | Packaging                | Operating part   |
| Medical Polymer Splint | 312 7.50cmX30cm          | 20bags/box<br>6boxes/ctn | wrists/Childrens |
| Medical Polymer Splint | 335 7.50cmX90cm          | 10bags/box<br>6boxes/ctn | arms/legs        |
| Medical Polymer Splint | 415 10.0cmX40cm          | 15bags/box<br>6boxes/ctn | arms/legs        |
| Medical Polymer Splint | 430 10.0cmX75cm          | 10bags/box<br>6boxes/ctn | legs             |
| Medical Polymer Splint | 530 12.5cmX75cm          | 10bags/box<br>6boxes/ctn | legs             |
| Medical Polymer Splint | 545 12.5cmX115cm         | 5bags/box<br>6boxes/ctn  | legs             |
| Medical Polymer Splint | 630 15.0cmX75cm          | 10bags/box<br>6boxes/ctn | legs             |
| Medical Polymer Splint | 645 15.0cmX115cm         | 5bags/box<br>6boxes/ctn  | legs             |

WWW.HDKSUTURE.COM WWW.SUTURESCN.COM

**Edison Forceps** 


29



Dissecting Forceps






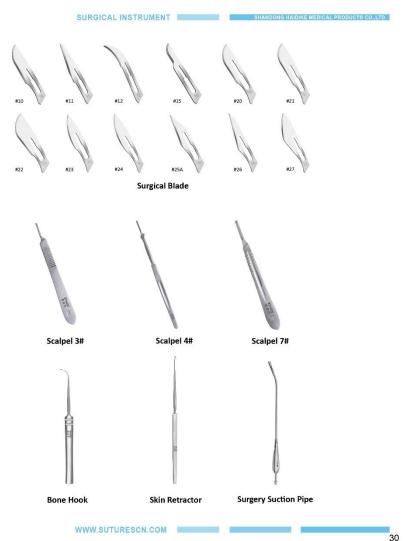

# **Electric Wheelchair**







| nt wheel size: 10 inches |
|--------------------------|
| r wheel size: 16 inches  |
| ensions: 1180×630×1360r  |

Maximum speed: 6km/h

Frame material: Carbon steel

Theoretical travel: 15km Motor (motor): DC24V250W\*2pcs Gradeability (gradient): 6 degrees

Net weight: 47kg (actually prevail)

# **Manual Wheelchair**









Front wheel size: 7 inches Rear wheel size: 24 inches Dimensions: 950×680×900mm Safe load: 100kg Frame material: Aluminum alloy Tire: solid tire

Net weight: 18kg (actually prevail) Armrest: blow molding/leather Seat width: 460mm Seat height: 520mm









| ont wheel size: 8 inches     | Net weight: 21.5kg (actually preva |
|------------------------------|------------------------------------|
| ar wheel size: 12 inches     | Maximum speed: 6km/h               |
| mensions: 990×590×950mm      | Theoretical travel: 15km           |
| fe load: 100kg               | Motor (motor): DC24V250W*2pd       |
| ame material: Aluminum alloy | Gradeability (gradient): 6 degre   |
| # 40 8 LV00 8 LL list i      | F. I. I                            |







| Front wheel size: 6 inches     |
|--------------------------------|
| Rear wheel size: 8 inches      |
| Dimensions: 1000×500×910mm     |
| Safe load: 100kg               |
| Frame material: Aluminum alloy |
| Folding size: 220×500×700mm    |

Net weight: 7.2kg (actually prevail) Armrest: blow molding/leather Seat width: 340mm Seat height: 490mm Backrest height: 410mm

WWW.HDKSUTURE.COM WWW.SUTURESCN.COM

# Seniors Shopping Cart A good helper for parents in life



Tie-rod brake design



Comfortable seat



Wear-resistant reinforced



# **New Generation Multi-claw Crutches**



#### Smooth all the way

- Anti-stumbling design
   Steady walk without hindrance
   The inside and outside width design is balanced and stable



#### Feel comfortable

 High wear-resistant handrail
 Surface cracked anti-skid treatment, anti-skid and wear-resistant, Ergonomic design, Fits to the hand without getting tired from holding for a long time.



#### Firmer and stronger

- 1.2mm wall thickness Thicken reinforcement
   Lightweight and load-bearing



#### Firm and convenient

- Annular clavicle clamp
   Fixed main pole Three simple steps

### **Medical Grade Crutches**



### PE environmentally friendly foam material arm rest

Thick PE foam material, high resilience, non-slip, soft and comfortable, strong abrasion resistance, not tired after long-term use.



### Leg height adjustment in 9 positions

The height of 9 levels is adjustable to meet the needs of people of different heights. Strengthen the aluminum alloy to provide super good support.



# Stable and non-slip height adjustable Grip three-position adjustment

The grip has three gears adjustment, the adjustment part is locked firmly and stably, and it is convenient to use and feel comfortable and soft




### Non-slip durable rubber pad

The rubber pad is made of rubber, which is thicker, stable and non-slip, and the built-in metal gasket is wear-resistant and



# **Nursing Bed**



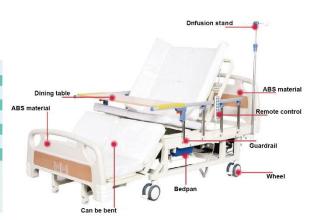

WWW.HDKSUTURE.COM

# RT cin ED\* RT cin ED RT cin ED" SILK Braided RT ctn ED RT aim ED"

# **Cassette Sutures**

| Length         | 25m         | 50m                 | 75m      | 100m          |
|----------------|-------------|---------------------|----------|---------------|
| Absorbable     |             | ic catgo<br>PGA, PG |          | n catgut<br>O |
| Non-absorbable | Silk, Nylor | n , Polye           | ster, Po | lypropylene   |



**Suture Materials** 



### Self-adhesive Elastic Bandage

| Standard    | Features        |
|-------------|-----------------|
| 5.0cm×450cm | Self-adhesive   |
| 7.5cm×450cm | High elasticity |
| 10cm×450cm  | Waterproof      |
| 15cm×450cm  | Easy to tear    |

# Milkshake















**Pet Staple Food** 











Cat Food / Dog Food



# **Acupoint Pressure Stimulation Patch**





Specification model: φ7cm×1 paste×40 paste, paste core φ3cm

Product description: This product is composed of spheres and medical tape. It is attached to acupuncture points of the human body and only exerts pressure stimulation by external force.

Intended use; It is used to stick to acupuncture points of the human body for external stimulation. Non-invasive.

# **Nasal Irrigator**



















WWW.HDKSUTURE.COM