


DOLSAN



www.dolsan.com.tr

Version 2019/01

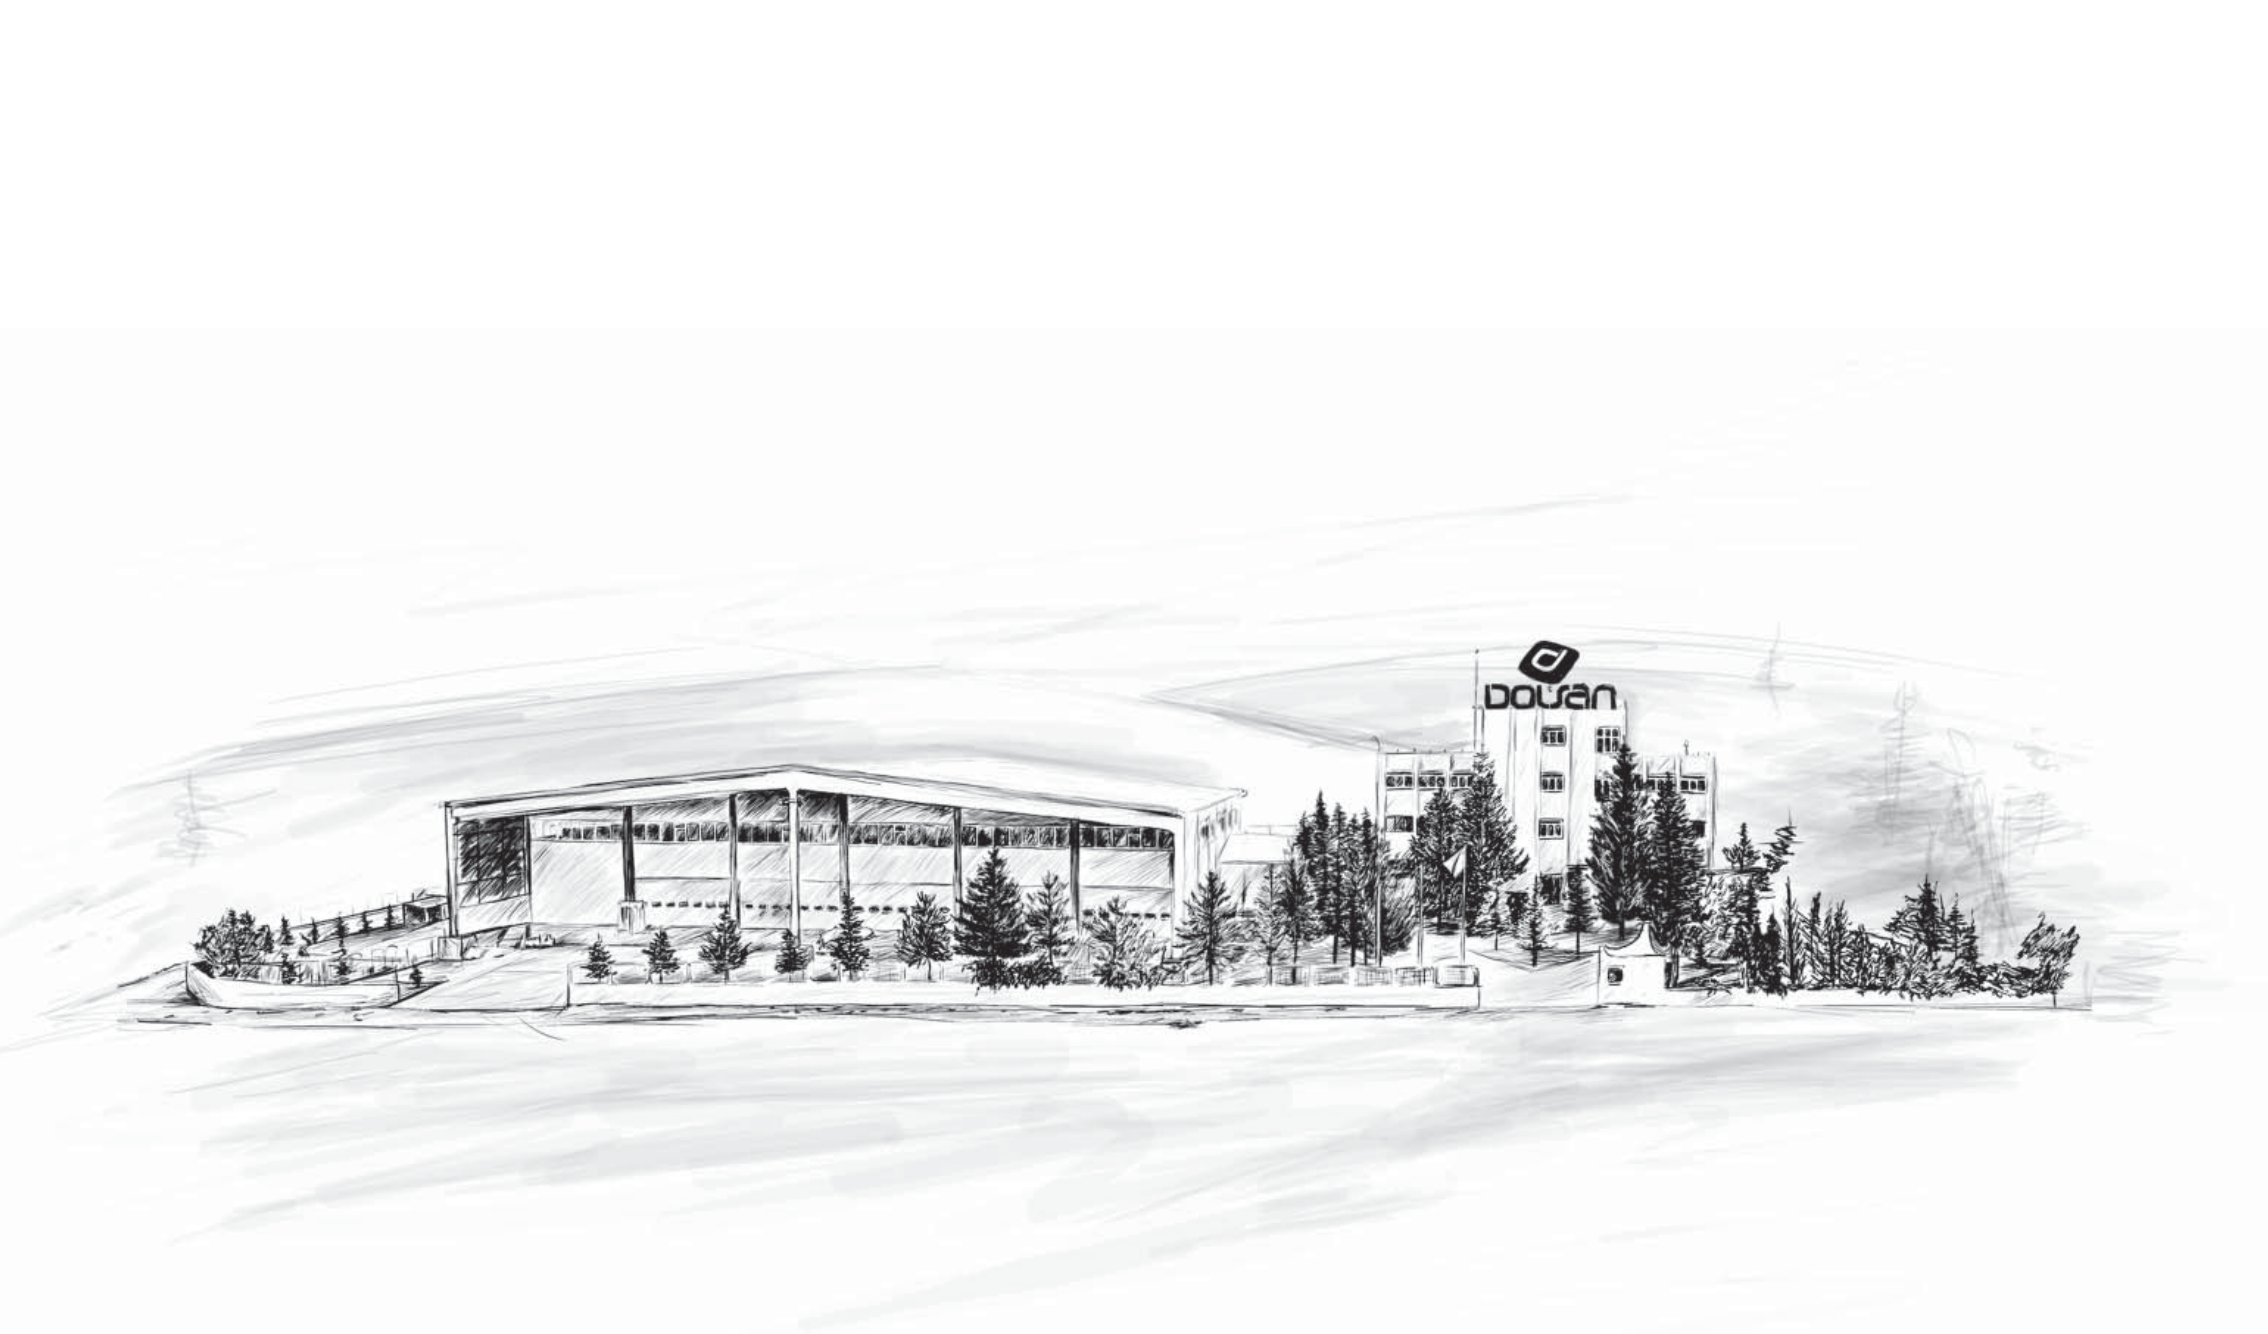

Since 1968...

INDEX



9

90101136
VIGOROUS 10
HOSPITAL BED 4
MOTORS WITH
COLUMNS (FH)



11

90101137.SS
VIGOROUS 11.SS
HOSPITAL BED
4 MOTORS



13

90101137
VIGOROUS 11
HOSPITAL BED 4
MOTORS WITH
SCISSOR



15

90101137.2
VIGOROUS 11.2
HOSPITAL BED 4
MOTORS WITH
SCISSOR



17

90101139
VIGOROUS 13
HOSPITAL BED 2
MOTORS



19

90101204
VIGOROUS 14
HOSPITAL BED
WITH 4 CRANKS



21

90101107
REBORN 2
HOSPITAL BED 4
MOTORS WITH
COLUMNS (RH)



23

90101112
REBORN 3
HOSPITAL BED 4
MOTORS WITH
SCISSOR



25

90101131
REBORN 7
HOSPITAL BED 2
MOTORS



27

90101134
SIMPLE 1
HOSPITAL BED 2
MOTORS



29

90101212
SIMPLE 3
HOSPITAL BED
WITH 2 CRANKS



30

90101213
SIMPLE 4
HOSPITAL BED
WITH 2 CRANKS



31

90101214
SIMPLE 5
HOSPITAL BED
WITH 1 CRANK



32

90101216
SIMPLE 7
HOSPITAL BED
WITH 2 CRANKS



33

90101218
SIMPLE 9
HOSPITAL BED
WITH 1 CRANK

INDEX



34

90101219
SIMPLE 10
HOSPITAL BED
WITH MULTIPLE
BLADE



35

90102101
CONFIDENCE 1
HOSPITAL BED
FOR CHILD



36

90103101
EMBRACE 1
BABY CODE



37

90104101
MATTRESS



37

90104103
MATTRESS VISCO



38

90104105
MATTRESS
CHILD VISCO




38

90104107
MATTRESS
BABY



39

90104109
MATTRESS
CHILD

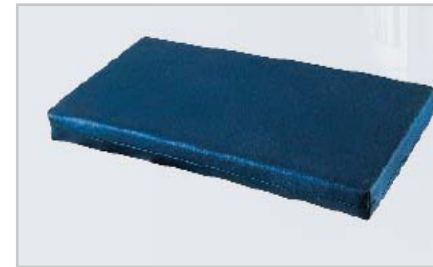

39

90104111
MATTRESS
ACCOMPANIMENT



40

90105101
BED SIDE
CABINET



40

90105102
BED SIDE
CABINET



41

90105201
BED SIDE
CABINET



41

90105301
BED SIDE
CABINET



42

90105302
BED SIDE
CABINET



42

90105401
BED SIDE
CABINET

INDEX



43

90105501
BED SIDE
CABINET



43

90105601
BED SIDE
CABINET
COMPACT



44

90105602
BED SIDE
CABINET
COMPACT WITH
REFRIGERATOR



44

90105603
BED SIDE
CABINET
COMPACT



45

90106101
OVER BED
TABLE
MECHANICAL



45

90106201
OVER BED
TABLE WITH
GAS SPRING



46

90111301
ARMCHAIR FOR
ACCOMPANIMENT



47

90111302
ARMCHAIR FOR
ACCOMPANIMENT



48

90107101
STRETCHER



49

90107102
STRETCHER



51

90107202
STRETCHER
EMERGENCY



53

90107201
STRETCHER
EMERGENCY



55

90107301
STRETCHER
TRANSPORT



56

90108101
TROLLEY
DRESSING



56

90108201
TROLLEY DRUG
DISTRIBUTION

INDEX



57

90108302
TROLLEY
EMERGENCY
AND DRUG
DISTRIBUTION



58

90109101
DRUG CABINET



58

90109102
DRUG CABINET



59

90109103
DRUG CABINET



59

90109104
DRUG CABINET



60

90110101
NEGATOSCOPE



60

90110102
NEGATOSCOPE



60

90110103
NEGATOSCOPE



61

90110201
NEGATOSCOPE



61

90110202
NEGATOSCOPE



61

90110203
NEGATOSCOPE



62

90111101
BLOOD
RECEPTION
CHAIR



62

90111102
BLOOD
RECEPTION
CHAIR



63

90111201
BLOOD DONOR
CHAIR



64

90111402
PATIENT
RECEPTION
COUCH

INDEX



65

90205106
PATIENT
HANDLING LIFT



66

90114102
BABY
EXAMINATION
COUCH



66

90114201
EXAMINATION
COUCH FOR
KIDS



67

90114305
EXAMINATION
COUCH



67

90114303
EXAMINATION
COUCH



68

90114304
EXAMINATION
COUCH



68

90118101
STEP



69

90115101
SCREEN



69

90115102
SCREEN



70

90115103
SCREEN



70

90113101
WHEELCHAIR



71

90116101
IV STAND



71

90116201
IV STAND



72

90117101
LINEN TROLLEY
DIRTY



72

90117201
LINEN TROLLEY
CLEAN & DIRTY

INDEX



73

90117202
LINEN TROLLEY
CLEAN & DIRTY



73

90119101
LOCKER



74

90119102
LOCKER



75

90119103
LOCKER



75

90119104
LOCKER



76

90119105
LOCKER



76

90119106
LOCKER



77

90119107
LOCKER



78

90119108
LOCKER



79

90119109
LOCKER



81

90201169
ELECTRICAL
UNIVERSAL
SURGICAL
TABLE



83

90201159
OPERATING
LIGHT

90101136 VIGOROUS 10

FUNCTIONS



Backrest adjustment : 0 - 68°



Thigh rest adjustment : 0 - 27°



Foot rest mechanical adjustment : 0 - 22°



Vascular position



Fowler position



Cardiac position



Trendelenburg position : 0 - 14°



Anti - trendelenburg position : 0 - 14°



Mattress platform minimum height : 46 cm (150 mm with castor)



Mattress platform maximum height : 83 cm (150 mm with castor)

OPTIONS

GROUP 1 / CASTOR OPTIONS



120 Kg



130 Kg



150 Kg

GROUP 3 / ELECTRICAL ACCESSORY OPTIONS



GROUP 6 / CONTROL PANEL OPTIONS



GROUP 8 / OTHER ACCESSORY OPTIONS



GROUP 2 / SIDE RAIL OPTIONS



GROUP 4 / BACKREST MOTOR OPTIONS



GROUP 7 / MATTRESS PLATFORM OPTIONS



DESCRIPTION OF OPTION CODES

- T1** TWIN CASTOR TWO WITH BRAKE (120 MM)
- T14** CASTOR CENTRAL & DIRECTIONAL LOCK (125 MM)
- T19** CASTOR CENTRAL & DIRECTIONAL LOCK (150 MM)
- K0** WITHOUT SIDE RAIL
- K5** WITH PE SIDE RAIL
- E0** WITHOUT ELECTRICAL ACCESSORIES
- E1** BATTERY RECHARGEABLE LEAD GEL TYPE. OUTPUT VOLTAGE: 24 V DC. CAPACITY: 1,2 Ah.
- E2** NURSE CONTROL PANEL. PROTECTION CATEGORY : IP 66. 15 FUNCTION KEY.
- E3** UNDER BED LIGHTING SYSTEM
- E4** FOOT CONTROL PEDAL. ONE PEDAL CPR. ONE PEDAL EXAMINATION POSITION FROM EACH SIDE.
- E5** SENSITIVE INTEGRATED SCALE SYSTEM
- M1** BACKREST MOTOR (4000 N)
- M2** BACKREST CPR MANUAL CONTROL MOTOR (2000 N)
- M3** LEGREST MOTOR (4000 N)
- M4** LEGREST CPR MANUAL CONTROL MOTOR (2000 N)

- C1** HAND REMOTE CONTROL. PROTECTION CATEGORY : IP 66
- C2** SIDE RAIL CONTROL PANEL RIGHT
- C3** SIDE RAIL CONTROL PANEL LEFT
- Y1** REMOVABLE 4 PARTED MESH PLATFORM.
- Y3** REMOVABLE DOUBLE WALLED PE BED PLATFORM
- W0** WITHOUT OTHER ACCESSORIES
- W1** IV STAND : ONE HEIGHT ADJUSTMENT SYSTEM
- W2** LIFTING POLE : BEARING CAPACITY 75 Kg
- W3** X-RAY AVAILABLE FOR BACK SIDE WITH CASSETTE HOLDER AND COMPACT LAMINATE
- W4** TELEVISION STAND FOR 17" LCD TV
- W9** BED EXTENSION : 20 cm.
- W10** 5" CASTOR
- W11** RESTRAINT STRAP

- Must select only one of them.**
- Must select minimum one. Can select 1-2-3 ... both.**
- Do not select the others if you select without accessory. If you select the others you can select all or 1-2-3 ... of them.**

GENERAL SPECIFICATIONS

- Easy to clean four-piece bed platform.
- Height, trendelenburg, reverse trendelenburg, head and foot movements with the help of an electrical motor.
- Head and foot platforms with automatic sliding system.
- Back angle indication assembled on head rail.
- Angle indication assembled on foot rail showing trendelenburg and reverse trendelenburg.
- The easily mountable and demountable cap system designed of hygienic PE plastic is fixed to the lower case from the head side; thus possible damage to the frame is avoided when the bed is converted to trendelenburg position.
- Shock resistance plastic bumper wheels.
- Metal components dyed with anti-corrosion electrostatic powder paint after being treated with phosphate.
- Upper and lower points of lower case regions of the column motor connection regions are covered with PE plastic material in terms of hygiene and ease of cleaning.
- Optional laminate color choice.^(RLX)


TECHNICAL SPECIFICATIONS

| | |
|---|--------------------|
| External dimension | : 102 x 219 cm |
| Width outside side rails | : 99 cm |
| Mattress platform | : 89 x 195 cm |
| Bed extension | : +20 cm |
| Recommended mattress dimension | : 85 x 194 x 12 cm |
| Autoregression (Backrest / Legrest) | : 8 cm / 4 cm |
| Safe Operating Load (Inc. Mattress and Accessories) | : 230 kg |
| Weight | : ~ 124 kg |
| Volume | : 1,05 m³ |

ELECTRICAL SPECIFICATIONS

| | |
|-------------------------------|--------------------------|
| Power Input | : 230 V AC 50 Hz Max 1 A |
| Power Output | : 24 V DC |
| Electrical Current Protection | : Class 1, Type B |
| Liquid and Dust Protection | : IP54 – IP66 |

SIDE RAIL SYSTEM

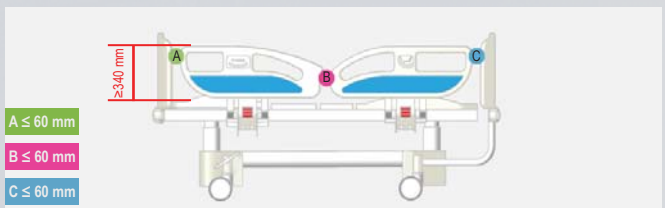

Full side guardrail system with two pieces that is designed in compliance with the EN 60601-2-52 standard, which was started to be applied in Europe and will be applicable in Turkey in following years; provides maximum safety for the in-patient and completely extinguishes the falling risk for the patient. The empty spaces on the guardrail do not prevent monitoring the patient in any of the positions. It is designed conveniently to support the patient while getting off the bed. By the courtesy of the aluminum coupling pieces as used on the guardrail, the guardrail is saved from deformation when the patient gives load on the guardrail. When the guardrail system is brought to the lowest level it is hidden under the platform of the bed and it does not establish an obstacle while transferring the patient. In standard guardrail systems bacteria grow on the region of the guardrail mounting coupling screws making the hygiene more difficult In Vigorous seat system, the coupling screws are hidden with laminate in order to minimize the surfaces where bacteria may grow and thus smooth surfaces are achieved. Guardrails are in concert with the bed head system by the courtesy of the laminate colors on the guardrails.



* RL : Laminate color options page 84.

FUNCTIONS



Backrest movement by motor 0 to 68°



Kneerest movement by motor 0 to 27°



Foot rest mechanical adjustment : 0 - 22°



Vascular position



Fowler position



Cardiac position



Trendelenburg position : 0 - 12°



Anti - trendelenburg position : 0 - 12°



Mattress platform minimum height : 42 cm



Mattress platform maximum height : 77 cm

OPTIONS

GROUP 1 / CASTOR OPTIONS



120 Kg



130 Kg



150 Kg

GROUP 2 / SIDE RAIL OPTIONS



GROUP 3 / ELECTRICAL ACCESSORY OPTIONS



GROUP 4 / BACKREST MOTOR OPTIONS



GROUP 5 / LEGREST MOTOR OPTIONS



GROUP 6 / CONTROL PANEL OPTIONS



GROUP 7 / MATTRESS PLATFORM OPTIONS



GROUP 8 / OTHER ACCESSORY OPTIONS



DESCRIPTION OF OPTION CODES

T1 TWIN CASTOR TWO WITH BRAKE (120 MM)

T14 CASTOR CENTRAL & DIRECTIONAL LOCK (125 MM)

T19 CASTOR CENTRAL & DIRECTIONAL LOCK (150 MM)

K0 WITHOUT SIDE RAIL

K5 WITH PE SIDE RAIL

E0 WITHOUT ELECTRICAL ACCESSORIES

E1 BATTERY RECHARGEABLE LEAD GEL TYPE. OUTPUT VOLTAGE: 24 V DC. CAPACITY: 1,2 Ah.

E2 NURSE CONTROL PANEL. PROTECTION CATEGORY : IP 66. 15 FUNCTION KEY. UNDER BED LIGHTING SYSTEM

E3 FOOT CONTROL PEDAL. ONE PEDAL CPR. ONE PEDAL EXAMINATION POSITION FROM EACH SIDE.

E4 BACKREST MOTOR (4000 N)

M1 BACKREST CPR MANUAL CONTROL MOTOR (2000 N)

M2 LEGREST MOTOR (4000 N)

M3 LEGREST CPR MANUAL CONTROL MOTOR (2000 N)

C1 HAND REMOTE CONTROL. PROTECTION CATEGORY : IP 66

C2 SIDE RAIL CONTROL PANEL RIGHT

C3 SIDE RAIL CONTROL PANEL LEFT

Y1 REMOVABLE 4 PARTED MESH PLATFORM.

Y3 REMOVABLE DOUBLE WALLED PE BED PLATFORM

W0 WITHOUT OTHER ACCESSORIES

W1 IV STAND : ONE HEIGHT ADJUSTMENT SYSTEM

W2 LIFTING POLE : BEARING CAPACITY 75 Kg

W3 X-RAY AVAILABLE FOR BACK SIDE WITH CASSETTE HOLDER AND COMPACT LAMINATE TELEVISION STAND FOR 17" LCD TV

W4 TRACTION APPARATUS

W9 BED EXTENSION : 20 cm.

W11 RESTRAINT STRAP

Must select only one of them.

Must select minimum one. Can select 1-2-3 ... both.

Do not select the others if you select without accessory. If you select the others you can select all or 1-2-3 ... of them.

GENERAL SPECIFICATIONS

- Easy to clean four-piece bed platform.
- Height, trendelenburg, reverse trendelenburg, head and foot movements with the help of an electrical motor.
- Head and foot platforms with automatic sliding system.
- Back angle indication assembled on head rail.
- Angle indication assembled on foot rail showing trendelenburg and reverse trendelenburg.
- Easily removable and installable head board system designed of hygienic PE plastic.
- Shock resistance plastic bumper wheels.
- Metal components dyed with anti-corrosion electrostatic powder paint after being treated with phosphate.
- Optional laminate color choice.^(RLX)


TECHNICAL SPECIFICATIONS

| | |
|---|--------------------|
| ■ External dimension | : 102 x 218 cm |
| ■ Width outside side rails | : 100 cm |
| ■ Mattress platform | : 89 x 195 cm |
| ■ Bed extension | : +30 cm |
| ■ Recommended mattress dimension | : 85 x 194 x 12 cm |
| ■ Autoregression (Backrest / Legrest) | : 8 cm / 4 cm |
| ■ Safe Operating Load (Inc. Mattress and Accessories) | : 230 kg |
| ■ Weight | : ~ 114 kg |
| ■ Volume | : 1,15 m³ |

ELECTRICAL SPECIFICATIONS

| | |
|---------------------------------|--------------------------|
| ■ Power Input | : 230 V AC 50 Hz Max 1 A |
| ■ Power Output | : 24 V DC |
| ■ Electrical Current Protection | : Class 1, Type B |
| ■ Liquid and Dust Protection | : IP54 – IP66 |

SIDE RAIL SYSTEM

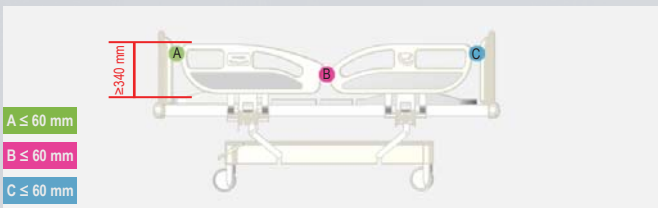

Full side guardrail system with two pieces that is designed in compliance with the EN 60601-2-52 standard, which was started to be applied in Europe and will be applicable in Turkey in following years; provides maximum safety for the in-patient and completely extinguishes the falling risk for the patient. The empty spaces on the guardrail do not prevent monitoring the patient in any of the positions. It is designed conveniently to support the patient while getting off the bed. By the courtesy of the aluminum coupling pieces as used on the guardrail, the guardrail is saved from deformation when the patient gives load on the guardrail. When the guardrail system is brought to the lowest level it is hidden under the platform of the bed and it does not establish an obstacle while transferring the patient. In standard guardrail systems bacteria grow on the region of the guardrail mounting coupling screws making the hygiene more difficult. In Vigorous seat system, the coupling screws are hidden with laminate in order to minimize the surfaces where bacteria may grow and thus smooth surfaces are achieved. Guardrails are in concert with the bed head system by the courtesy of the laminate colors on the guardrails.



* RL : Laminate color options page 84.

FUNCTIONS



Backrest adjustment : 0 - 68°



Thigh rest adjustment : 0 - 27°



Foot rest mechanical adjustment : 0 - 22°



Vascular position



Fowler position



Cardiac position



Trendelenburg position : 0 - 16°



Anti - trendelenburg position : 0 - 16°



Mattress platform minimum height : 49 cm (150 mm with castor)



Mattress platform maximum height : 79 cm (150 mm with castor)


HOSPITAL BED 4 MOTORS WITH SCISSOR

OPTIONS

GROUP 1 / CASTOR OPTIONS




GROUP 3 / ELECTRICAL ACCESSORY OPTIONS



GROUP 6 / CONTROL PANEL OPTIONS



GROUP 8 / OTHER ACCESSORY OPTIONS

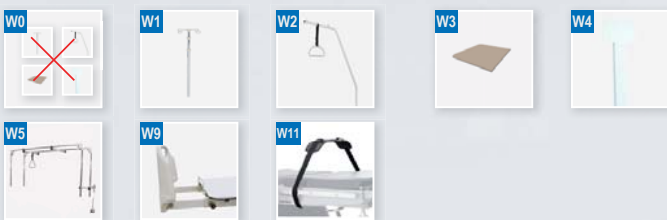

GROUP 2 / SIDE RAIL OPTIONS



GROUP 4 / BACKREST MOTOR OPTIONS



GROUP 5 / LEGREST MOTOR OPTIONS



GROUP 7 / MATTRESS PLATFORM OPTIONS



DESCRIPTION OF OPTION CODES

| | | | |
|-----|--|----|---|
| T1 | TWIN CASTOR TWO WITH BRAKE (120 MM) | C1 | HAND REMOTE CONTROL. PROTECTION CATEGORY : IP 66 |
| T14 | CASTOR CENTRAL & DIRECTIONAL LOCK (125 MM) | C2 | SIDE RAIL CONTROL PANEL RIGHT |
| T19 | CASTOR CENTRAL & DIRECTIONAL LOCK (150 MM) | C3 | SIDE RAIL CONTROL PANEL LEFT |
| K0 | WITHOUT SIDE RAIL | Y1 | REMOVABLE 4 PARTED MESH PLATFORM. |
| K5 | WITH PE SIDE RAIL | Y3 | REMOVABLE DOUBLE WALLED PE BED PLATFORM |
| E0 | WITHOUT ELECTRICAL ACCESSORIES | W0 | WITHOUT OTHER ACCESSORIES |
| E1 | BATTERY RECHARGEABLE LEAD GEL TYPE. OUTPUT VOLTAGE: 24 V DC. CAPACITY: 1,2 Ah. | W1 | IV STAND : ONE HEIGHT ADJUSTMENT SYSTEM |
| E2 | NURSE CONTROL PANEL. PROTECTION CATEGORY : IP 66. 15 FUNCTION KEY. UNDER BED LIGHTING SYSTEM | W2 | LIFTING POLE : BEARING CAPACITY 75 Kg |
| E3 | FOOT CONTROL PEDAL. ONE PEDAL CPR. ONE PEDAL EXAMINATION POSITION FROM EACH SIDE. | W3 | X-RAY AVAILABLE FOR BACK SIDE WITH CASSETTE HOLDER AND COMPACT LAMINATE TELEVISION STAND FOR 17" LCD TV |
| E4 | BACKREST MOTOR (4000 N) | W4 | TRACTION APPARATUS |
| M1 | BACKREST CPR MANUAL CONTROL MOTOR (2000 N) | W5 | BED EXTENSION : 20 cm. |
| M2 | LEGREST MOTOR (4000 N) | W9 | RESTRAINT STRAP |
| M3 | LEGREST CPR MANUAL CONTROL MOTOR (2000 N) | | |
| M4 | | | |

- Must select only one of them.
- Do not select the others if you select without accessory. If you select the others you can select all or 1-2-3 ... of them.
- Must select minimum one. Can select 1-2-3 ... both.

GENERAL SPECIFICATIONS

- Easy to clean four-piece bed platform.
- Height, trendelenburg, reverse trendelenburg, head and foot movements with the help of an electrical motor.
- Head and foot platforms with automatic sliding system.
- Back angle indication assembled on head rail.
- Angle indication assembled on foot rail showing trendelenburg and reverse trendelenburg.
- Easily removable and installable head board system designed of hygienic PE plastic.
- Shock resistance plastic bumper wheels.
- Metal components dyed with anti-corrosion electrostatic powder paint after being treated with phosphate.
- Profile frame with easy removable PE plastic covers.
- Optional laminate color choice. (R.L.X)


TECHNICAL SPECIFICATIONS

| | |
|---|--------------------|
| External dimension | : 102 x 217,5 cm |
| Width outside side rails | : 99 cm |
| Mattress platform | : 89 x 195 cm |
| Bed extension | : +20 cm |
| Recommended mattress dimension | : 85 x 194 x 12 cm |
| Autoregression (Backrest / Legrest) | : 8 cm / 4 cm |
| Safe Operating Load (Inc. Mattress and Accessories) | : 230 kg |
| Weight | : ~ 114 kg |
| Volume | : 1,15 m³ |

ELECTRICAL SPECIFICATIONS

| | |
|-------------------------------|--------------------------|
| Power Input | : 230 V AC 50 Hz Max 1 A |
| Power Output | : 24 V DC |
| Electrical Current Protection | : Class 1, Type B |
| Liquid and Dust Protection | : IP54 – IP66 |

SIDE RAIL SYSTEM

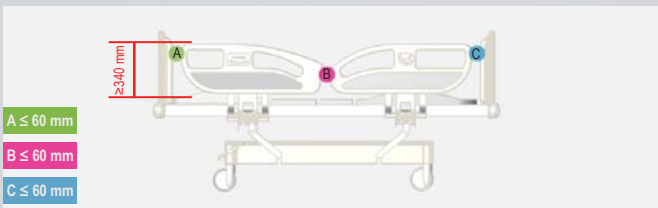

Full side guardrail system with two pieces that is designed in compliance with the EN 60601-2-52 standard, which was started to be applied in Europe and will be applicable in Turkey in following years; provides maximum safety for the in-patient and completely extinguishes the falling risk for the patient. The empty spaces on the guardrail do not prevent monitoring the patient in any of the positions. It is designed conveniently to support the patient while getting off the bed. By the courtesy of the aluminum coupling pieces as used on the guardrail, the guardrail is saved from deformation when the patient gives load on the guardrail. When the guardrail system is brought to the lowest level it is hidden under the platform of the bed and it does not establish an obstacle while transferring the patient. In standard guardrail systems bacteria grow on the region of the guardrail mounting coupling screws making the hygiene more difficult In Vigorous seat system, the coupling screws are hidden with laminate in order to minimize the surfaces where bacteria may grow and thus smooth surfaces are achieved. Guardrails are in concert with the bed head system by the courtesy of the laminate colors on the guardrails.



* RL : Laminate color options page 84.

90101139 VIGOROUS 13

FUNCTIONS



Backrest adjustment : 0 - 68°



Thigh rest adjustment : 0 - 27°



Foot rest mechanical adjustment : 0 - 22°



Vascular position



Fowler position



Trendelenburg position : 0 - 12°



Mattress platform height : 49,5 cm

HOSPITAL BED 2 MOTORS

OPTIONS

GROUP 1 / CASTOR OPTIONS



120 Kg



125 Kg



125 Kg



130 Kg



150 Kg

GROUP 2 / SIDE RAIL OPTIONS



GROUP 3 / ELECTRICAL ACCESSORY OPTIONS



GROUP 4 / CONTROL PANEL OPTIONS



GROUP 5 / MATTRESS PLATFORM OPTIONS



GROUP 6 / OTHER ACCESSORY OPTIONS



DESCRIPTION OF OPTION CODES

T1 TWIN CASTOR TWO WITH BRAKE (120 MM)

T16 CASTOR TWO WITH BRAKE (125 MM)

T4 METAL CASTOR TWO WITH BRAKE (125 MM)

T14 CASTOR CENTRAL & DIRECTIONAL LOCK (125 MM)

T19 CASTOR CENTRAL & DIRECTIONAL LOCK (150 MM)

K0 WITHOUT SIDE RAIL

K5 WITH PE SIDE RAIL

E0 WITHOUT ELECTRICAL ACCESSORIES

E1 BATTERY RECHARGEABLE LEAD GEL TYPE. OUTPUT VOLTAGE: 24 V DC. CAPACITY: 1,2 Ah.

E3 UNDER BED LIGHTING SYSTEM

C1 HAND REMOTE CONTROL. PROTECTION CATEGORY : IP 66

C2 SIDE RAIL CONTROL PANEL. RIGHT

C3 SIDE RAIL CONTROL PANEL. LEFT

Y1 REMOVABLE 4 PARTED MESH PLATFORM.

Y3 REMOVABLE DOUBLE WALLED PE BED PLATFORM

W0 WITHOUT OTHER ACCESSORIES

W1 IV STAND : ONE HEIGHT ADJUSTMENT SYSTEM

W2 LIFTING POLE : BEARING CAPACITY 75 Kg

W4 TELEVISION STAND FOR 17" LCD TV

W5 TRACTION APPARATUS

Red box Must select only one of them.

Green box Must select minimum one. Can select 1-2-3 ... both.

Blue box Do not select the others if you select without accessory. If you select the others you can select all or 1-2-3 ... of them.

GENERAL SPECIFICATIONS

- Easy to clean four-piece bed platform.
- Head and foot movements with the help of an electrical motor.
- Trendelenburg movement by the help of shock absorber mechanism at foot side.
- Head and foot platforms with automatic sliding system.
- Ergonomic, durable and easily cleanable rails system with maximum safety designed in accordance with the standards of EN 60601-2-52.
- Back angle indication assembled on head rail.
- Angle indication assembled on foot rail showing trendelenburg and reverse trendelenburg.
- Easily removable and installable head board system designed of hygienic PE plastic.
- Shock resistance plastic bumper wheels.
- Metal components dyed with anti-corrosion electrostatic powder paint after being treated with phosphate.
- Optional laminate color choice. (RLX)

TECHNICAL SPECIFICATIONS

■ External dimension : 102 x 217,5 cm

■ Width outside side rails : 99 cm

■ Mattres platform : 89 x 195 cm

■ Recommended mattress dimension : 85 x 194 x 12 cm

■ Autoregression (Backrest / Legrest) : 8 cm / 4 cm

■ Safe Operating Load

(Inc. Mattress and Accessories) : 230 kg

■ Weight : ~ 89 kg

■ Volume : 1,17 m³

ELECTRICAL SPECIFICATIONS


■ Power Input : 230 V AC 50 Hz Max 1 A

■ Power Output : 24 V DC

■ Electrical Current Protection : Class 1, Type B

■ Liquid and Dust Protection : IP54 – IP66

SIDE RAIL SYSTEM

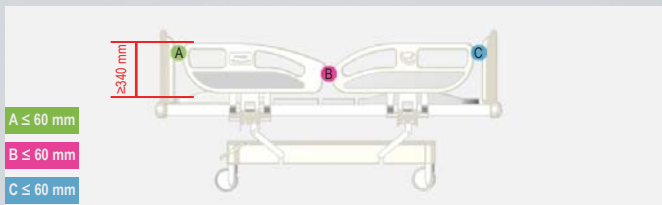

Full side guardrail system with two pieces that is designed in compliance with the EN 60601-2-52 standard, which was started to be applied in Europe and will be applicable in Turkey in following years; provides maximum safety for the in-patient and completely extinguishes the falling risk for the patient. The empty spaces on the guardrail do not prevent monitoring the patient in any of the positions. It is designed conveniently to support the patient while getting off the bed. By the courtesy of the aluminum coupling pieces as used on the guardrail, the guardrail is saved from deformation when the patient gives load on the guardrail. When the guardrail system is brought to the lowest level it is hidden under the platform of the bed and it does not establish an obstacle while transferring the patient. In standard guardrail systems bacteria grow on the region of the guardrail mounting coupling screws making the hygiene more difficult In Vigorous seat system, the coupling screws are hidden with laminate in order to minimize the surfaces where bacteria may grow and thus smooth surfaces are achieved. Guardrails are in concert with the bed head system by the courtesy of the laminate colors on the guardrails.



* RL : Laminate color options page 84.

90101204 VIGOROUS 14

FUNCTIONS



Backrest adjustment : 0 - 70°



Thigh rest adjustment : 0 - 40°



Foot rest mechanical adjustment : 0 - 25°



Vascular position



Fowler position



Cardiac position



Trendelenburg position : 0 - 12°



Anti-trendelenburg position : 0 - 12°



Mattress platform minimum height : 43 cm



Mattress platform maximum height : 73 cm

HOSPITAL BED WITH 4 CRANKS

OPTIONS

GROUP 1 / CASTOR OPTIONS



120 Kg



125 Kg



125 Kg



130 Kg



150 Kg

GROUP 2 / SIDE RAIL OPTIONS



K0



K5

GROUP 3 / MATTRESS PLATFORM OPTIONS



Y1



Y3

GROUP 4 / OTHER ACCESSORY OPTIONS



W0



W2



W4



W5



W8

DESCRIPTION OF OPTION CODES

T1 TWIN CASTOR TWO WITH BRAKE (120 MM)

T16 CASTOR TWO WITH BRAKE (125 MM)

T4 METAL CASTOR TWO WITH BRAKE (125 MM)

T14 CASTOR CENTRAL & DIRECTIONAL LOCK (125 MM)

T19 CASTOR CENTRAL & DIRECTIONAL LOCK (150 MM)

K0 WITHOUT SIDE RAIL

K5 WITH PE SIDE RAIL

Must select only one of them.

Y1 REMOVABLE 4 PARTED MESH PLATFORM.

Y3 REMOVABLE DOUBLE WALLED PE BED PLATFORM

W0 WITHOUT OTHER ACCESSORIES

W2 LIFTING POLE : BEARING CAPACITY 75 Kg

W4 TELEVISION STAND FOR 17" LCD TV

W5 TRACTION APPARATUS

W8 IV STAND : ONE HEIGHT ADJUSTMENT SYSTEM

Do not select the others if you select without accessory. If you select the others you can select all or 1-2-3 ... of them.

GENERAL SPECIFICATIONS

- Easy to clean four-piece bed platform.
- Height, trendelenburg, reverses trendelenburg, head and foot movements with rotating levers.
- Ergonomic, durable and easily cleanable rails system with maximum safety.
- Easily removable and installable head board system designed of hygienic PE plastic.
- Shock resistance plastic bumper wheels.
- Metal components dyed with anti-corrosion electrostatic powder paint after being treated with phosphate.
- Optional laminate color choice. ^(RLX)

TECHNICAL SPECIFICATIONS

| | | |
|--|---|---------------------|
| ■ External dimension | : | 105 x 216 cm |
| ■ Width outside side rails | : | 99 cm |
| ■ Mattres platform | : | 89 x 195 cm |
| ■ Recommended mattress dimension | : | 85 x 194 x 12 cm |
| ■ Safe Operating Load (Inc. Mattress and Accessories) | : | 230 kg |
| ■ Weight | : | ~ 105 kg |
| ■ Volume | : | 1,07 m ³ |



* RL : Laminate color options page 84.

90101107 REBORN 2

FUNCTIONS



Backrest adjustment : 0 - 68°



Thigh rest adjustment : 0 - 27°



Foot rest mechanical adjustment : 0 - 22°



Vascular position



Fowler position



Cardiac position



Trendelenburg position : 0 - 14°



Anti - trendelenburg position : 0 - 14°



Mattress platform minimum height : 46 cm (150 mm with castor)



Mattress platform maximum height : 83 cm (150 mm with castor)

HOSPITAL BED 4 MOTORS WITH COLUMNS (RH)

OPTIONS

GROUP 1 / CASTOR OPTIONS



120 Kg





130 Kg



150 Kg

GROUP 2 / SIDE RAIL OPTIONS



GROUP 3 / ELECTRICAL ACCESSORY OPTIONS



GROUP 4 / BACKREST MOTOR OPTIONS



GROUP 5 / LEGREST MOTOR OPTIONS



GROUP 6 / MATTRESS PLATFORM OPTIONS



GROUP 7 / OTHER ACCESSORY OPTIONS



DESCRIPTION OF OPTION CODES

- T1** TWIN CASTOR TWO WITH BRAKE (120 MM)
- T14** CASTOR CENTRAL & DIRECTIONAL LOCK (125 MM)
- T19** CASTOR CENTRAL & DIRECTIONAL LOCK (150 MM)
- K0** WITHOUT SIDE RAIL
- K4** WITH ALUMINIUM SIDE RAIL
- E0** WITHOUT ELECTRICAL ACCESSORIES
- E1** BATTERY RECHARGEABLE LEAD GEL TYPE. OUTPUT VOLTAGE: 24 V DC. CAPACITY: 1,2 Ah.
- E2** NURSE CONTROL PANEL. PROTECTION CATEGORY : IP 66. 15 FUNCTION KEY.
- E3** UNDER BED LIGHTING SYSTEM
- M1** BACKREST MOTOR (4000 N)
- M2** BACKREST CPR MANUAL CONTROL MOTOR (2000 N)

- M3** LEGREST MOTOR (4000 N)
- M4** LEGREST CPR MANUAL CONTROL MOTOR (2000 N)
- Y1** REMOVABLE 4 PARTED MESH PLATFORM.
- Y3** REMOVABLE DOUBLE WALLED PE BED PLATFORM
- W0** WITHOUT OTHER ACCESSORIES
- W1** IV STAND : ONE HEIGHT ADJUSTMENT SYSTEM
- W2** LIFTING POLE : BEARING CAPACITY 75 Kg
- W3** X-RAY AVAILABLE FOR BACK SIDE WITH CASSETTE HOLDER AND COMPACT LAMINATE
- W4** TELEVISION STAND FOR 17" LCD TV
- W5** TRACTION APPARATUS
- W9** BED EXTENSION : 20 cm.

Must select only one of them.

Must select minimum one. Can select 1-2-3 ... both.

Do not select the others if you select without accessory. If you select the others you can select all or 1-2-3 ... of them.

GENERAL SPECIFICATIONS

- Easy to clean four-piece bed platform.
- Height, trendelenburg, reverse trendelenburg, head and foot movements with the help of an electrical motor.
- Ergonomic, durable and easily cleanable aluminum rails system with maximum safety designed in accordance with the standards of EN 60601-2-52.
- Head and foot platforms with automatic sliding system.
- Easily removable and installable, hygienic, high resistant head board system designed of compact laminate and aluminum.
- Shock resistance plastic bumper wheels.
- Metal components dyed with anti-corrosion electrostatic powder paint after being treated with phosphate.
- Upper and lower points of lower case regions of the column motor connection regions are covered with PE plastic material in terms of hygiene and ease of cleaning.
- Optional laminate color choice.^(RLX)

TECHNICAL SPECIFICATIONS

| | |
|--|--------------------|
| ■ External dimension | : 102 x 222,5 cm |
| ■ Width outside side rails | : 98 cm |
| ■ Mattres platform | : 89 x 195 cm |
| ■ Bed extension | : +20 cm |
| ■ Recommended mattress dimension | : 85 x 194 x 12 cm |
| ■ Autoregression (Backrest / Legrest) | : 8 cm / 4 cm |
| ■ Safe Operating Load (Inc. Mattres and Accessories) | : 230 kg |
| ■ Weight | : ~ 133 kg |
| ■ Volume | : 1,14 m³ |

ELECTRICAL SPECIFICATIONS

| | |
|---------------------------------|--------------------------|
| ■ Power Input | : 230 V AC 50 Hz Max 1 A |
| ■ Power Output | : 24 V DC |
| ■ Electrical Current Protection | : Class 1, Type B |
| ■ Liquid and Dust Protection | : IP54 – IP66 |



* RL : Laminate color options page 84.

90101112 REBORN 3

FUNCTIONS



Backrest adjustment : 0 - 68°



Thigh rest adjustment : 0 - 27°



Foot rest mechanical adjustment : 0 - 22°



Vascular position



Fowler position



Cardiac position



Trendelenburg position : 0 - 16°



Anti - trendelenburg position : 0 - 16°



Mattress platform minimum height : 50 cm (150 mm with castor)



Mattress platform maximum height : 80 cm (150 mm with castor)

HOSPITAL BED 4 MOTORS WITH SCISSOR

OPTIONS

GROUP 1 / CASTOR OPTIONS



120 Kg





130 Kg



150 Kg

GROUP 2 / SIDE RAIL OPTIONS



GROUP 3 / ELECTRICAL ACCESSORY OPTIONS



GROUP 4 / BACKREST MOTOR OPTIONS



GROUP 5 / LEGREST MOTOR OPTIONS



GROUP 6 / MATTRESS PLATFORM OPTIONS



GROUP 7 / OTHER ACCESSORY OPTIONS



DESCRIPTION OF OPTION CODES

- T1** TWIN CASTOR TWO WITH BRAKE (120 MM)
- T14** CASTOR CENTRAL & DIRECTIONAL LOCK (125 MM)
- T19** CASTOR CENTRAL & DIRECTIONAL LOCK (150 MM)
- K0** WITHOUT SIDE RAIL
- K4** WITH ALUMINIUM SIDE RAIL
- E0** WITHOUT ELECTRICAL ACCESSORIES
- E1** BATTERY RECHARGEABLE LEAD GEL TYPE. OUTPUT VOLTAGE: 24 V DC. CAPACITY: 1,2 Ah.
- E2** NURSE CONTROL PANEL. PROTECTION CATEGORY : IP 66. 15 FUNCTION KEY.
- E3** UNDER BED LIGHTING SYSTEM
- M1** BACKREST MOTOR (4000 N)
- M2** BACKREST CPR MANUAL CONTROL MOTOR (2000 N)

- M3** LEGREST MOTOR (4000 N)
- M4** LEGREST CPR MANUAL CONTROL MOTOR (2000 N)
- Y1** REMOVABLE 4 PARTED MESH PLATFORM.
- Y3** REMOVABLE DOUBLE WALLED PE BED PLATFORM
- W0** WITHOUT OTHER ACCESSORIES
- W1** IV STAND : ONE HEIGHT ADJUSTMENT SYSTEM
- W2** LIFTING POLE : BEARING CAPACITY 75 Kg
- W3** X-RAY AVAILABLE FOR BACK SIDE WITH CASSETTE HOLDER AND COMPACT LAMINATE
- W4** TELEVISION STAND FOR 17" LCD TV
- W5** TRACTION APPARATUS
- W9** BED EXTENSION : 20 cm.

Must select only one of them.

Do not select the others if you select without accessory. If you select the others you can select all or 1-2-3 ... of them.

GENERAL SPECIFICATIONS

- Easy to clean four-piece bed platform.
- Height, trendelenburg, reverse trendelenburg, head and foot movements with the help of an electrical motor.
- Ergonomic, durable and easily cleanable aluminum rails system with maximum safety designed in accordance with the standards of EN 60601-2-52.
- Head and foot platforms with automatic sliding system.
- Easily removable and installable, hygienic, high resistant head board system designed of compact laminate and aluminum.
- Shock resistance plastic bumper wheels.
- Metal components dyed with anti-corrosion electrostatic powder paint after being treated with phosphate.
- Profile frame with easy removable PE plastic covers.
- Optional laminate color choice.^(RLX)

TECHNICAL SPECIFICATIONS

| | |
|--|-----------------------|
| ■ External dimension | : 102 x 222,5 cm |
| ■ Width outside side rails | : 98 cm |
| ■ Mattres platform | : 89 x 195 cm |
| ■ Bed extension | : +20 cm |
| ■ Recommended mattress dimension | : 85 x 194 x 12 cm |
| ■ Autoregression (Backrest / Legrest) | : 8 cm / 4 cm |
| ■ Safe Operating Load (Inc. Mattres and Accessories) | : 230 kg |
| ■ Weight | : ~ 127 kg |
| ■ Volume | : 1,23 m ³ |

ELECTRICAL SPECIFICATIONS

| | |
|---------------------------------|--------------------------|
| ■ Power Input | : 230 V AC 50 Hz Max 1 A |
| ■ Power Output | : 24 V DC |
| ■ Electrical Current Protection | : Class 1, Type B |
| ■ Liquid and Dust Protection | : IP54 – IP66 |



* RL : Laminate color options page 84.

90101131 REBORN 7

FUNCTIONS



Backrest adjustment : 0 - 68°



Thigh rest adjustment : 0 - 27°



Foot rest mechanical adjustment : 0 - 22°



Vascular position



Fowler position



Trendelenburg position : 0 - 12°

HOSPITAL BED 2 MOTORS

OPTIONS

GROUP 1 / CASTOR OPTIONS



120 Kg



125 Kg



125 Kg





130 Kg



150 Kg

GROUP 2 / SIDE RAIL OPTIONS



GROUP 3 / ELECTRICAL ACCESSORY OPTIONS



GROUP 4 / MATTRESS PLATFORM OPTIONS



GROUP 5 / OTHER ACCESSORY OPTIONS



DESCRIPTION OF OPTION CODES

- T1** TWIN CASTOR TWO WITH BRAKE (120 MM)
- T16** CASTOR TWO WITH BRAKE (125 MM)
- T4** METAL CASTOR TWO WITH BRAKE (125 MM)
- T14** CASTOR CENTRAL & DIRECTIONAL LOCK (125 MM)
- T19** CASTOR CENTRAL & DIRECTIONAL LOCK (150 MM)
- K0** WITHOUT SIDE RAIL
- K4** WITH ALUMINIUM SIDE RAIL
- E0** WITHOUT ELECTRICAL ACCESSORIES
- E1** BATTERY RECHARGEABLE LEAD GEL TYPE. OUTPUT VOLTAGE: 24 V DC. CAPACITY: 1,2 Ah.

- E3** UNDER BED LIGHTING SYSTEM
- Y1** REMOVABLE 4 PARTED MESH PLATFORM.
- Y3** REMOVABLE DOUBLE WALLED PE BED PLATFORM
- W0** WITHOUT OTHER ACCESSORIES
- W1** IV STAND : ONE HEIGHT ADJUSTMENT SYSTEM
- W2** LIFTING POLE : BEARING CAPACITY 75 Kg
- W4** TELEVISION STAND FOR 17" LCD TV
- W5** TRACTION APPARATUS

Must select only one of them.

Do not select the others if you select without accessory. If you select the others you can select all or 1-2-3 ... of them.

GENERAL SPECIFICATIONS

- Easy to clean four-piece bed platform.
- Head and foot movements with the help of an electrical motor.
- Trendelenburg movement by the help of shock absorber mechanism at foot side.
- Ergonomic, durable and easily cleanable aluminum rails system with maximum safety designed in accordance with the standards of EN 60601-2-52.
- Head and foot platforms with automatic sliding system.
- Easily removable and installable, hygienic, high resistant head board system designed of compact laminate and aluminum.
- Shock resistance plastic bumper wheels.
- Metal components dyed with anti-corrosion electrostatic powder paint after being treated with phosphate.
- Optional laminate color choice.^(RLX)

TECHNICAL SPECIFICATIONS

| | | |
|--|---|-----------------------|
| ■ External dimension | : | 102 x 222,5 x 49,5 cm |
| ■ Width outside side rails | : | 98 cm |
| ■ Mattres platform | : | 89 x 195 cm |
| ■ Recommended mattress dimension | : | 85 x 194 x 12 cm |
| ■ Autoregression (Backrest / Legrest) | : | 8 cm / 4 cm |
| ■ Safe Operating Load (Inc. Mattress and Accessories) | : | 230 kg |
| ■ Weight | : | ~ 101 kg |
| ■ Volume | : | 1,23 m ³ |

ELECTRICAL SPECIFICATIONS

| | | |
|---------------------------------|---|------------------------|
| ■ Power Input | : | 230 V AC 50 Hz Max 1 A |
| ■ Power Output | : | 24 V DC |
| ■ Electrical Current Protection | : | Class 1, Type B |
| ■ Liquid and Dust Protection | : | IP54 – IP66 |



* RL : Laminate color options page 84.

90101134 SIMPLE 1

FUNCTIONS



Backrest adjustment : 0 - 70°



Thigh rest adjustment : 0 - 40°



Foot rest mechanical adjustment : 0 - 25°



Vascular position



Fowler position



Trendelenburg position : 0 - 12°

HOSPITAL BED 2 MOTORS

OPTIONS

GROUP 1 / CASTOR OPTIONS



120 Kg



125 Kg



125 Kg

GROUP 2 / SIDE RAIL OPTIONS



K0



K1



K3

GROUP 3 / OTHER ACCESSORY OPTIONS



W0



W2



W4



W5



W8

DESCRIPTION OF OPTION CODES

T1 TWIN CASTOR TWO WITH BRAKE (120 MM)

T16 CASTOR TWO WITH BRAKE (125 MM)

T4 METAL CASTOR TWO WITH BRAKE (125 MM)

K0 WITHOUT SIDE RAIL

K1 WITH METAL SIDE RAIL

K3 WITH METAL SIDE RAIL

W0 WITHOUT OTHER ACCESSORIES

W2 LIFTING POLE : BEARING CAPACITY 75 Kg

W4 TELEVISION STAND FOR 17" LCD TV

W5 TRACTION APPARATUS

W8 IV STAND : ONE HEIGHT ADJUSTMENT SYSTEM

Must select only one of them.

**Do not select the others if you select without accessory.
If you select the others you can select all or 1-2-3 ... of them.**

GENERAL SPECIFICATIONS

- Easily cleanable metal bed platform designed for the ventilation of the bed.
- Head and foot movements with the help of an electrical motor.
- Trendelenburg movement by the help of shock absorber mechanism at foot side.
- Ergonomic, durable and easily cleanable metal rails system with maximum safety.
- Melamine coated chipboard head and foot panels.
- Removable and installable head system that can be also used as a resulation board if necessary.
- Shock resistance plastic bumper wheels.
- Castor system with two-castor brake in a diameter of 125 mm.
- Metal components dyed with anti-corrosion electrostatic powder paint after being treated with phosphate.
- Optional melamine coated chipboard color choice.^(RSX)

TECHNICAL SPECIFICATIONS

| | | |
|--|---|---------------------|
| ■ External dimension | : | 105 x 204 x 50 cm |
| ■ Recommended mattress dimension | : | 85 x 190 x 12 cm |
| ■ Safe Operating Load (Inc. Mattress and Accessories) | : | 230 kg |
| ■ Weight | : | ~ 86 kg |
| ■ Volume | : | 1,17 m ³ |

ELECTRICAL SPECIFICATIONS

| | | |
|----------------|---|-------------------------|
| ■ Power Input | : | 230 V AC 50 / 60 Hz 50W |
| ■ Power Output | : | 24 V DC |



* RS : Melamine color options page 85.

90101212 SIMPLE 3

FUNCTIONS



Backrest adjustment : 0 - 70°



Thigh rest adjustment : 0 - 40°



Foot rest mechanical adjustment :
0 - 25°



Vascular position



Fowler position



Trendelenburg position : 0 - 12°

HOSPITAL BED WITH 2 CRANKS

OPTIONS

GROUP 1 / CASTOR OPTIONS



120 Kg



125 Kg



125 Kg

GROUP 2 / SIDE RAIL OPTIONS



K0



K1



K3

GROUP 3 / OTHER ACCESSORY OPTIONS



W0



W2



W4



W5



W8

DESCRIPTION OF OPTION CODES

- T1** TWIN CASTOR TWO WITH BRAKE (120 MM)
- T16** CASTOR TWO WITH BRAKE (125 MM)
- T4** METAL CASTOR TWO WITH BRAKE (125 MM)
- K0** WITHOUT SIDE RAIL
- K1** WITH METAL SIDE RAIL
- K3** WITH METAL SIDE RAIL

- W0** WITHOUT OTHER ACCESSORIES
- W2** LIFTING POLE : BEARING CAPACITY 75 Kg
- W4** TELEVISION STAND FOR 17" LCD TV
- W5** TRACTION APPARATUS
- W8** IV STAND : ONE HEIGHT ADJUSTMENT SYSTEM

Must select only one of them.

Do not select the others if you select without accessory.
If you select the others you can select all or 1-2-3 ... of them.

GENERAL SPECIFICATIONS

- Easily cleanable metal bed platform designed for the ventilation of the bed.
- Head and foot movements with rotating levers.
- Trendelenburg movement by the help of shock absorber mechanism at foot side.
- Ergonomic, durable and easily cleanable metal rails system with maximum safety.
- Melamine coated chipboard head and foot panels.
- Removable and installable head system that can be also used as a resulation board if necessary.
- Shock resistance plastic bumper wheels.
- Metal components dyed with anti-corrosion electrostatic powder paint after being treated with phosphate.
- Optional melamine coated chipboard color choice.^(RSX)

TECHNICAL SPECIFICATIONS

| | | |
|--|---|---------------------|
| ■ External dimension | : | 105 x 204 x 50 cm |
| ■ Recommended mattress dimension | : | 85 x 190 x 12 cm |
| ■ Safe Operating Load (Inc. Mattress and Accessories) | : | 230 kg |
| ■ Weight | : | ~ 82 kg |
| ■ Volume | : | 1,17 m ³ |



* RS : Melamine color options page 85.

FUNCTIONS



Backrest adjustment : 0 - 70°



Thigh rest adjustment : 0 - 40°



Foot rest mechanical adjustment : 0 - 25°



Vascular position



Fowler position

GENERAL SPECIFICATIONS

- Easily cleanable metal bed platform designed for the ventilation of the bed.
- Head and foot movements with rotating levers.
- Ergonomic, durable and easily cleanable metal rails system with maximum safety.
- Melamine coated chipboard head and foot panels.
- Metal components dyed with anti-corrosion electrostatic powder paint after being treated with phosphate.
- Optional melamine coated chipboard color choice.^(RSX)

TECHNICAL SPECIFICATIONS

| | | |
|----------|---|---------|
| ■ Width | : | 102 cm |
| ■ Length | : | 208 cm |
| ■ Height | : | 50 cm |
| ■ Weight | : | ~ 80 kg |
| ■ Volume | : | 0,64 m³ |

OPTIONS

GROUP 1 / CASTOR OPTIONS



GROUP 2 / SIDE RAIL OPTIONS



GROUP 3 / OTHER ACCESSORY OPTIONS



DESCRIPTION OF OPTION CODES

- T0 WITHOUT CASTORS
- T4 METAL CASTOR TWO WITH BRAKE (125 MM)
- T16 CASTOR TWO WITH BRAKE (125 MM)
- K0 WITHOUT SIDE RAIL
- K1 WITH METAL SIDE RAIL
- K3 WITH METAL SIDE RAIL
- W0 WITHOUT OTHER ACCESSORIES
- W2 LIFTING POLE : BEARING CAPACITY 75 Kg
- W8 IV STAND : ONE HEIGHT ADJUSTMENT SYSTEM

■ Must select only one of them.

■ Do not select the others if you select without accessory.
If you select the others you can select all or 1-2-3 ... of them.



* RS : Melamine color options page 85.

90101214 SIMPLE 5

HOSPITAL BED WITH 1 CRANK

GENERAL SPECIFICATIONS

- Easily cleanable metal bed platform designed for the ventilation of the bed.
- Head movement with rotating levers.
- Ergonomic, durable and easily cleanable metal rails system with maximum safety.
- Melamine coated chipboard head and foot panels.
- Metal components dyed with anti-corrosion electrostatic powder paint after being treated with phosphate.
- Optional melamine coated chipboard color choice. ^(RSX)

TECHNICAL SPECIFICATIONS

| | | |
|-----------------------|---|---------------------|
| ■ Width | : | 102 cm |
| ■ Length | : | 208 cm |
| ■ Height | : | 50 cm |
| ■ Backrest Adjustment | : | 70° |
| ■ Weight | : | ~ 72 kg |
| ■ Volume | : | 0,64 m ³ |

OPTIONS

GROUP 1 / CASTOR OPTIONS



GROUP 2 / SIDE RAIL OPTIONS



GROUP 3 / OTHER ACCESSORY OPTIONS




DESCRIPTION OF OPTION CODES

| | |
|-----|---|
| T0 | WITHOUT CASTORS |
| T4 | METAL CASTOR TWO WITH BRAKE (125 MM) |
| T16 | CASTOR TWO WITH BRAKE (125 MM) |
| K0 | WITHOUT SIDE RAIL |
| K1 | WITH METAL SIDE RAIL |
| K3 | WITH METAL SIDE RAIL |
| W0 | WITHOUT OTHER ACCESSORIES |
| W2 | LIFTING POLE : BEARING CAPACITY 75 Kg |
| W8 | IV STAND : ONE HEIGHT ADJUSTMENT SYSTEM |

Must select only one of them.

Do not select the others if you select without accessory.
If you select the others you can select all or 1-2-3 ... of them.

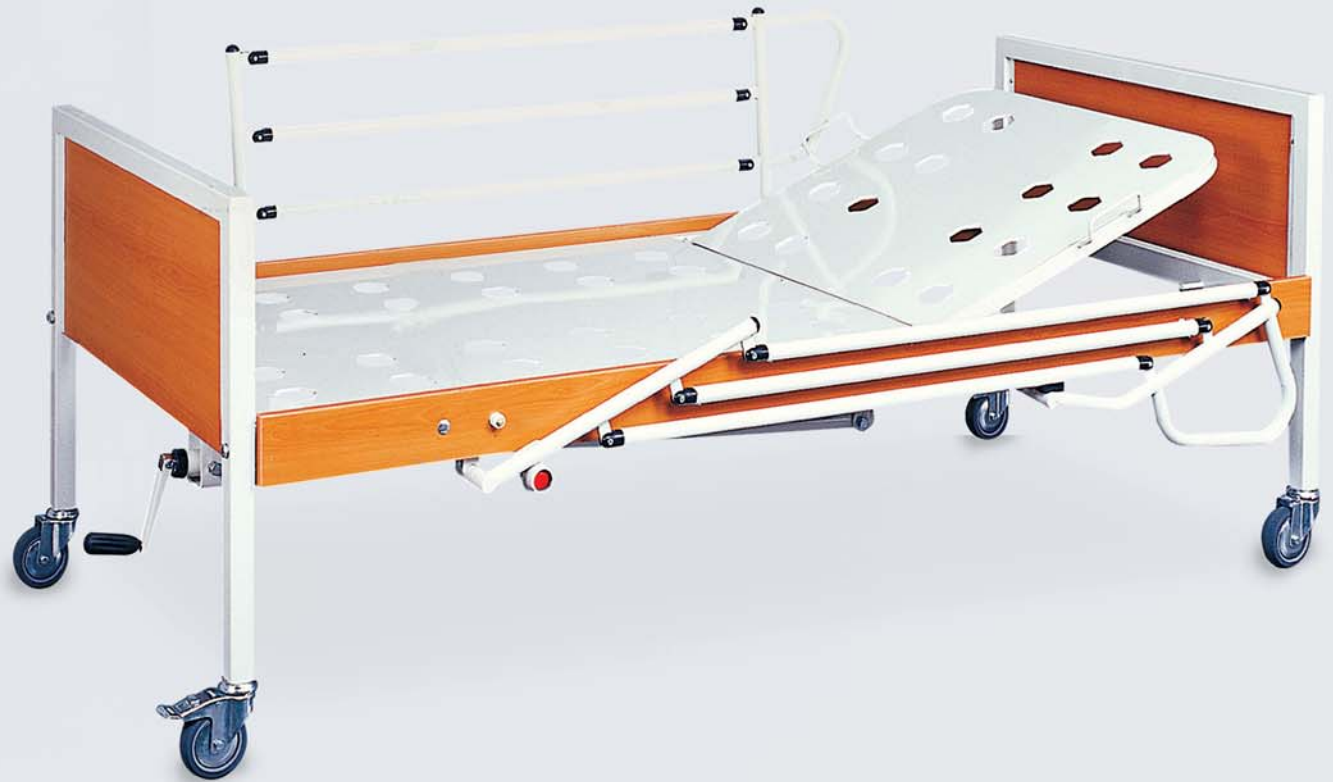



* RS : Melamine color options page 85.

GENERAL SPECIFICATIONS

- Platform becomes from four sections. Bed floor is in the form of the grid so bed can receive the air.
- Head and foot movements with rotating levers.
- Ergonomic, durable and easily cleanable metal rails system with maximum safety is optional.
- Portable head and foot boards.
- Shock resistance plastic bumper wheels.
- Metal components dyed with anti-corrosion electrostatic powder paint after being treated with phosphate.
- Optional melamine colour choice for the metal-framed wooden headboard.^(RSX)
- Optional laminate colour choice for the PE plastic headboard.^(RLX)

TECHNICAL SPECIFICATIONS

| | | |
|-----------------------|---|---------------------|
| ■ Width | : | 105 cm |
| ■ Length | : | 204 cm |
| ■ Height | : | 50 cm |
| ■ Backrest Adjustment | : | 68° |
| ■ Legrest Adjustment | : | 35° |
| ■ Weight | : | ~ 63 kg |
| ■ Volume | : | 0,64 m ³ |

OPTIONS**GROUP 1 / CASTOR OPTIONS****GROUP 2 / BOARD OPTIONS****GROUP 3 / SIDE RAIL OPTIONS****GROUP 4 / OTHER ACCESSORY OPTIONS****DESCRIPTION OF OPTION CODES**

| | | | |
|------------|--|--|---|
| T0 | WITHOUT CASTORS | W0 | WITHOUT OTHER ACCESSORIES |
| T4 | METAL CASTOR TWO WITH BRAKE (125 MM) | W2 | LIFTING POLE : BEARING CAPACITY 75 Kg |
| T16 | PLASTIC CASTOR TWO WITH BRAKE (125 MM) | W4 | TELEVISION STAND FOR 17" LCD TV |
| B1 | METAL BOARD | W5 | TRACTION APPARATUS |
| B2 | PE PLASTIC BOARD | W8 | IV STAND : ONE HEIGHT ADJUSTMENT SYSTEM |
| K0 | WITHOUT SIDE RAIL | Must select only one of them. | |
| K1 | WITH METAL SIDE RAIL | Do not select the others if you select without accessory. If you select the others you can select all or 1-2-3 ... of them. | |
| K3 | WITH METAL SIDE RAIL | | |



* RS : Melamine color options page 85.

* RL : Laminate color options page 84.

90101218 SIMPLE 9

HOSPITAL BED WITH 1 CRANK

GENERAL SPECIFICATIONS

- Platform becomes from two sections. Bed floor is in the form of the grid so bed can receive the air.
- Head movement with rotating levers.
- Ergonomic, durable and easily cleanable metal rail system with maximum safety is optional.
- Portable head and foot boards.
- Shock resistance plastic bumper wheels.
- Metal components dyed with anti-corrosion electrostatic powder paint after being treated with phosphate.
- Optional melamine colour choice for the metal-framed wooden headboard.^(RSX)
- Optional laminate colour choice for the PE plastic headboard.^(RLX)

TECHNICAL SPECIFICATIONS

| | | |
|-----------------------|---|---------------------|
| ■ Width | : | 105 cm |
| ■ Length | : | 204 cm |
| ■ Height | : | 50 cm |
| ■ Backrest Adjustment | : | 68° |
| ■ Weight | : | ~ 52 kg |
| ■ Volume | : | 0,64 m ³ |

OPTIONS

GROUP 1 / CASTOR OPTIONS



GROUP 2 / BOARD OPTIONS



GROUP 3 / SIDE RAIL OPTIONS



GROUP 4 / OTHER ACCESSORY OPTIONS



DESCRIPTION OF OPTION CODES

| | | | |
|------------|--|-----------|---|
| T0 | WITHOUT CASTORS | W0 | WITHOUT OTHER ACCESSORIES |
| T4 | METAL CASTOR TWO WITH BRAKE (125 MM) | W2 | LIFTING POLE : BEARING CAPACITY 75 Kg |
| T16 | PLASTIC CASTOR TWO WITH BRAKE (125 MM) | W4 | TELEVISION STAND FOR 17" LCD TV |
| B1 | METAL BOARD | W5 | TRACTION APPARATUS |
| B2 | PE PLASTIC BOARD | W8 | IV STAND : ONE HEIGHT ADJUSTMENT SYSTEM |
| K0 | WITHOUT SIDE RAIL | | |
| K1 | WITH METAL SIDE RAIL | | |
| K3 | WITH METAL SIDE RAIL | | |

Must select only one of them.

Do not select the others if you select without accessory.
If you select the others you can select all or 1-2-3 ... of them.



* RS : Melamine color options page 85.

* RL : Laminate color options page 84.

90101219 SIMPLE 10

HOSPITAL BED WITH MULTIPLE BLADE

GENERAL SPECIFICATIONS

- Platform becomes from two sections. Bed floor is in the form of the grid 50x50 so bed can receive the air or platform with holes.
- Back movement with gradual metal sheet system.
- Ergonomic, durable and easily cleanable metal rails, aluminum system with maximum safety is optional. Side rails according EN 60601-2-52
- Portable head and foot boards.
- Shock resistance plastic bumper wheels.
- Methods of the metal construction protection can be: powder coating after being treated phosphate, plastification, galvanization , antibacterial plastification.
- Optional melamine colour choice for the metal-framed wooden headboard. ^(RSX)
- Optional laminate colour choice for the PE or ABS plastic headboard. ^(RLX)

TECHNICAL SPECIFICATIONS


- Width : 105 cm
- Length : 204 cm
- Height : 50 cm
- Backrest Adjustment : 75°
- Weight Capacity : 180 kg
- Volume : 0,48 m³
- There is tolerance on all dimensions : ± 20cm

OPTIONS

GROUP 1 / CASTOR OPTIONS



GROUP 2 / BOARD OPTIONS



GROUP 3 / SIDE RAIL OPTIONS



GROUP 4 / OTHER ACCESSORY OPTIONS



DESCRIPTION OF OPTION CODES

| | |
|---|---|
| T0 WITHOUT CASTORS | W0 WITHOUT OTHER ACCESSORIES |
| T4 METAL CASTOR TWO WITH BRAKE (125 MM) | W2 LIFTING POLE : BEARING CAPACITY 75 Kg |
| T16 PLASTIC CASTOR TWO WITH BRAKE (125 MM) | W4 TELEVISION STAND FOR 17" LCD TV |
| B1 METAL BOARD | W5 TRACTION APPARATUS |
| B2 PE OR ABS PLASTIC BOARD | W8 IV STAND : ONE HEIGHT ADJUSTMENT SYSTEM |
| K0 WITHOUT SIDE RAIL | |
| K1 WITH METAL SIDE RAIL | |
| K3 WITH METAL SIDE RAIL | |
| K6 WITH ALUMINUM SIDE RAIL 6 POLES | |

Must select only one of them.

Do not select the others if you select without accessory.
If you select the others you can select all or 1-2-3 ... of them.



* RS : Melamine color options page 85.

* RL : Laminate color options page 84.

90102101 CONFIDENCE 1

HOSPITAL BED FOR CHILD

GENERAL SPECIFICATIONS

- Easily cleanable metal bed platform designed for the ventilation of the bed.
- Backrest adjusted by mechanical system.
- Ergonomic, durable and easily cleanable rails system that can be adjustable at both sides of the bed.
- Shock resistance plastic bumper wheels.
- Metal components dyed with anti-corrosion electrostatic powder paint after being treated with phosphate.
- Cabinet, which is metal bodied, is designed to multi usage on legrest of child bed. (Optional)
- Optional laminate color choice.^(RLX)

TECHNICAL SPECIFICATIONS

| | |
|------------------------------|-----------------------|
| ■ Width | : 77 cm |
| ■ Length | : 156 cm |
| ■ Height | : 50 cm |
| ■ Weight (Without Accessory) | : ~ 53 kg |
| ■ Accompaniment Weight | : ~ 13 kg |
| ■ Weight (Cabinet) | : ~ 19,5 kg |
| ■ Volume (Without Accessory) | : 0,17 m ³ |
| ■ Volume (Cabinet) | : 0,14 m ³ |

OPTIONS

GROUP 1 / CASTOR OPTIONS



GROUP 2 / CABINET OPTIONS



GROUP 3 / ACCOMPANIMENT OPTIONS



GROUP 4 / IV STAND OPTIONS



DESCRIPTION OF OPTION CODES

| | |
|----|---|
| T0 | WITHOUT CASTORS |
| T4 | METAL CASTOR TWO WITH BRAKE (125 MM) |
| D0 | WITHOUT CABINET |
| D2 | WITH CABINET |
| R0 | WITHOUT ACCOMPANIMENT BED |
| R1 | WITH ACCOMPANIMENT BED |
| W0 | WITHOUT OTHER ACCESSORIES |
| W8 | IV STAND : ONE HEIGHT ADJUSTMENT SYSTEM |
| | Must select only one of them. |



* RL : Laminate color options page 84.

90103101 EMBRACE 1

BABY CODE

FUNCTIONS



Height : 85,5 cm



Trendelenburg position : 0 - 14°



Anti - trendelenburg position : 0 - 14°

OPTIONS

GROUP 1 / CASTOR OPTIONS



GROUP 2 / CABINET OPTIONS



DESCRIPTION OF OPTION CODES

- T0 WITHOUT CASTORS
- T7 CASTOR TWO WITH BRAKE (50 MM)
- D0 WITHOUT CABINET
- D1 METAL WITH CABINET

Must select only one of them.

GENERAL SPECIFICATIONS

- Manufacture from antibacterial, transparent flexi glass and portable.
- Trendelenburg and reverse trendelenburg position are adjusted by mechanical system.
- Epoxy painted steel construction is resistant to corrosion.
- Moves easily by 50 mm diameter four castors two of them with brake to fix the position. (Optional)

TECHNICAL SPECIFICATIONS

| | | |
|------------------------------|---|---------|
| ■ Width | : | 45 cm |
| ■ Length | : | 79 cm |
| ■ Weight (Without Accessory) | : | ~ 11 kg |
| ■ Weight (Cabinet) | : | ~ 8 kg |
| ■ Volume | : | 0,34 m³ |



90104101

MATTRESS

GENERAL SPECIFICATIONS

- The foam is for hospital beds use.
- The cover is non latex and washable.
- The cover is conductive, antistatic, antibacterial, antiacid, antifungus.
- The cover is waterproof and easy to clean.
- The cover is non latex and washable.

TECHNICAL SPECIFICATIONS

| | |
|----------|-----------------------|
| ■ Width | : 90 cm |
| ■ Depth | : 200 cm |
| ■ Height | : 15 cm |
| ■ Volume | : 0,24 m ³ |



90104103

MATTRESS VISCO

GENERAL SPECIFICATIONS

- Special foam sponge is able to be take a shape according to the hospital bed positions.
- Anti-bacterial bed cover provides air circulation and protects the bed with its liquid tight feature.
- Bed cover, which can be removable and assembled by a zip fastener system if necessary, is of washable feature.

TECHNICAL SPECIFICATIONS

| | |
|----------|-----------------------|
| ■ Width | : 90 cm |
| ■ Depth | : 200 cm |
| ■ Height | : 15 cm |
| ■ Weight | : ~ 8 kg |
| ■ Volume | : 0,21 m ³ |



90104105

MATTRESS CHILD VISCO

GENERAL SPECIFICATIONS

- Special foam sponge is able to be take a shape according to the hospital bed positions.
- Anti-bacterial bed cover provides air circulation and protects the bed with its liquid tight feature.
- Bed cover, which can be removable and assembled by a zip fastener system if necessary, is of washable feature.

TECHNICAL SPECIFICATIONS

| | | |
|----------|---|---------------------|
| ■ Width | : | 70 cm |
| ■ Depth | : | 140 cm |
| ■ Height | : | 12 cm |
| ■ Weight | : | approx 5 kg |
| ■ Volume | : | 0,14 m ³ |



90104107

MATTRESS BABY

GENERAL SPECIFICATIONS

- The cover is antistatic, antibacterial, water proof and washable.
- There is special foam inside

TECHNICAL SPECIFICATIONS

| | | |
|----------|---|----------------------|
| ■ Width | : | 64 cm |
| ■ Depth | : | 30 cm |
| ■ Height | : | 5 cm |
| ■ Weight | : | ~ 0,6 kg |
| ■ Volume | : | 0,015 m ³ |



90104109

MATTRESS CHILD

GENERAL SPECIFICATIONS

- Special foam sponge is able to be take a shape according to the hospital bed positions.
- Anti-bacterial bed cover provides air circulation and protects the bed with its liquid tight feature.
- Bed cover, which can be removable and assembled by a zip fastener system if necessary, is of washable feature.

TECHNICAL SPECIFICATIONS

| | |
|----------|-----------------------|
| ■ Width | : 70 cm |
| ■ Depth | : 140 cm |
| ■ Height | : 12 cm |
| ■ Weight | : approx 5 kg |
| ■ Volume | : 0,14 m ³ |



90104111

MATTRESS ACCOMPANIMENT

GENERAL SPECIFICATIONS

- Special foam sponge is able to be take a shape according to the hospital bed positions.
- Anti-bacterial bed cover provides air circulation and protects the bed with its liquid tight feature.
- Bed cover, which can be removable and assembled by a zip fastener system if necessary, is of washable feature.

TECHNICAL SPECIFICATIONS

| | |
|----------|-----------------------|
| ■ Width | : 64 cm |
| ■ Depth | : 134 cm |
| ■ Height | : 12 cm |
| ■ Weight | : approx 4,5 kg |
| ■ Volume | : 0,12 m ³ |



90105101

GENERAL SPECIFICATIONS

- Laminate or ABS top is resistant to water and heat.
- Useful drawer.
- Long lived hinge and rail system.
- Strong drawer and cabined handle.
- A shelf designed for multi usage in the cabinet.
- Epoxy painted steel construction is resistant to corrosion.
- With four castors (two of them with brake) can move freely.

TECHNICAL SPECIFICATIONS

| | | |
|----------|---|---------|
| ■ Width | : | 40 cm |
| ■ Depth | : | 40 cm |
| ■ Height | : | 79,5 cm |
| ■ Weight | : | ~ 12 kg |
| ■ Volume | : | 0,14 m³ |

* RS : Melamine color options page 85.

* RL : Laminate color options page 84.

BED SIDE CABINET

OPTIONS

GROUP 1 / CASTOR OPTIONS



GROUP 2 / TABLE TOP OPTIONS



DESCRIPTION OF OPTION CODES

- T8** PLASTIC CASTORS TWO WITH BRAKE (50 MM)
- T9** WITH ALUMINIUM FIXED LEG
- KL1** LAMINATE COATED CHIPBOARD TOP
- KL2** ABS TOP
- KL4** MELAMINE COATED CHIPBOARD TOP

Must select only one of them.



90105102

GENERAL SPECIFICATIONS

- Laminate or ABS top is resistant to water and heat.
- Useful drawer.
- Long lived hinge and rail system.
- Strong drawer and cabined handle.
- A shelf designed for multi usage.
- Epoxy painted steel construction is resistant to corrosion.
- With four castors (two of them with brake) can move freely.

TECHNICAL SPECIFICATIONS

| | | |
|----------|---|---------|
| ■ Width | : | 40 cm |
| ■ Depth | : | 40 cm |
| ■ Height | : | 78,5 cm |
| ■ Weight | : | ~ 12 kg |
| ■ Volume | : | 0,13 m³ |

* RS : Melamine color options page 85.

* RL : Laminate color options page 84.

OPTIONS

GROUP 1 / CASTOR OPTIONS



GROUP 2 / TABLE TOP OPTIONS



DESCRIPTION OF OPTION CODES

- T8** PLASTIC CASTORS TWO WITH BRAKE (50 MM)
- T9** WITH ALUMINIUM FIXED LEG
- KL1** LAMINATE COATED CHIPBOARD TOP
- KL2** ABS TOP
- KL4** MELAMINE COATED CHIPBOARD TOP

Must select only one of them.



90105201

GENERAL SPECIFICATIONS

- Laminate top is resistant to water and heat.
- Useful drawer.
- Long lived hinge and rail system.
- Strong drawer and cabined handle.
- Adjustable bed table according to height of bed and hidden beside of cabinet if necessary.
- Cavity designed for multi usage.
- Epoxy painted steel construction is resistant to corrosion.
- With four castors (two of them with brake) can move freely.

TECHNICAL SPECIFICATIONS

| | |
|-----------------------|-----------------------|
| ■ Width | : 50 cm |
| ■ Depth | : 40 cm |
| ■ Height | : 80,5 cm |
| ■ Dining table height | : 85 - 110 cm |
| ■ Weight | : ~ 20 kg |
| ■ Volume | : 0,19 m ³ |

* RS : Melamine color options page 85.

* RL : Laminate color options page 84.

BED SIDE CABINET

OPTIONS

GROUP 1 / TABLE TOP OPTIONS



DESCRIPTION OF OPTION CODES

- KL1 LAMINATE COATED CHIPBOARD TOP
- KL4 MELAMINE COATED CHIPBOARD TOP
- Must select only one of them.



90105301

GENERAL SPECIFICATIONS

- Wood body is durable against to water and heat.
- Useful drawer.
- Long lived hinge and rail system.
- Strong drawer and cabined handle.
- Laminated drawer and door are durable against to water and heat.
- With four castors (two of them with brake) can move freely.

TECHNICAL SPECIFICATIONS

| | |
|----------|-----------------------|
| ■ Width | : 40 cm |
| ■ Depth | : 40 cm |
| ■ Height | : 78,5 cm |
| ■ Weight | : ~ 17 kg |
| ■ Volume | : 0,13 m ³ |

* RS : Melamine color options page 85.

* RL : Laminate color options page 84.

OPTIONS


GROUP 1 / CASTOR OPTIONS



DESCRIPTION OF OPTION CODES

- T8 PLASTIC CASTORS TWO WITH BRAKE (50 MM)
- T9 WITH ALUMINIUM FIXED LEG
- KL1 LAMINATE COATED CHIPBOARD TOP
- KL2 ABS TOP
- KL4 MELAMINE COATED CHIPBOARD TOP
- Must select only one of them.

GROUP 2 / TABLE TOP OPTIONS



90105302

GENERAL SPECIFICATIONS

- Wood body is durable against to water and heat.
- Useful drawer.
- Long lived hinge and rail system.
- Strong drawer and cabined handle.
- Cavity designed for multi usage.
- Laminated drawer and door are durable against to water and heat.
- With four castors (two of them with brake) can move freely.

TECHNICAL SPECIFICATIONS

| | | |
|----------|---|---------|
| ■ Width | : | 40 cm |
| ■ Depth | : | 40 cm |
| ■ Height | : | 78,5 cm |
| ■ Weight | : | ~ 17 kg |
| ■ Volume | : | 0,13 m³ |

* RS : Melamine color options page 85.

* RL : Laminate color options page 84.

BED SIDE CABINET

OPTIONS

GROUP 1 / CASTOR OPTIONS



GROUP 2 / TABLE TOP OPTIONS



DESCRIPTION OF OPTION CODES

- T8** PLASTIC CASTORS TWO WITH BRAKE (50 MM)
- T9** WITH ALUMINIUM FIXED LEG
- KL1** LAMINATE COATED CHIPBOARD TOP
- KL2** ABS TOP
- KL4** MELAMINE COATED CHIPBOARD TOP

Must select only one of them.



90105401

GENERAL SPECIFICATIONS

- Laminate top is resistant to water and heat.
- Useful drawer.
- Long lived hinge and rail system.
- Strong drawer and cabined handle.
- Adjustable bed table according to height of bed and hidden beside of cabinet if necessary.
- Laminated drawer and door are durable against to water and heat.
- With four castors (two of them with brake) can move freely.

TECHNICAL SPECIFICATIONS

| | | |
|-----------------------|---|-------------|
| ■ Width | : | 50 cm |
| ■ Depth | : | 40 cm |
| ■ Height | : | 78 cm |
| ■ Dining table height | : | 80 - 105 cm |
| ■ Weight | : | ~ 25 kg |
| ■ Volume | : | 0,18 m³ |

* RS : Melamine color options page 85.

* RL : Laminate color options page 84.

OPTIONS

GROUP 1 / TABLE TOP OPTIONS



DESCRIPTION OF OPTION CODES

- KL1** LAMINATE COATED CHIPBOARD TOP
- KL4** MELAMINE COATED CHIPBOARD TOP

Must select only one of them.



90105501

GENERAL SPECIFICATIONS

- Laminate or ABS top is resistant to water and heat.
- Useful drawer.
- Long lived hinge and rail system.
- Strong drawer and cabined handle.
- Laminated drawer and door are durable against to water and heat.
- Aluminum frame.
- Cabinet with two doors.
- With four castors (two of them with brake) can move freely.

TECHNICAL SPECIFICATIONS

| | |
|----------|-----------------------|
| ■ Width | : 47,3 cm |
| ■ Depth | : 46,5 cm |
| ■ Height | : 74 cm |
| ■ Weight | : ~ 22 kg |
| ■ Volume | : 0,18 m ³ |

* RS : Melamine color options page 85.

* RL : Laminate color options page 84.

BED SIDE CABINET

OPTIONS

GROUP 1 / TABLE TOP OPTIONS



DESCRIPTION OF OPTION CODES

- KL1 LAMINATE COATED CHIPBOARD TOP
- KL2 ABS TOP
- KL4 MELAMINE COATED CHIPBOARD TOP
- Must select only one of them.



90105601

GENERAL SPECIFICATIONS

- Compact laminate or ABS top is resistant to water and heat.
- Compact laminate (HPL) body resistant to water and heat.
- Aluminum frame.
- Useful drawer.
- Long life hinge and rail system.
- Strong drawer and cabined handle.
- With four castors (two of them with brake) can move freely.

TECHNICAL SPECIFICATIONS

| | |
|----------|-----------------------|
| ■ Width | : 47,3 cm |
| ■ Depth | : 46,5 cm |
| ■ Height | : 84,5 cm |
| ■ Weight | : ~ 21 kg |
| ■ Volume | : 0,22 m ³ |

* RL : Laminate color options page 84.

OPTIONS

GROUP 1 / TABLE TOP OPTIONS



DESCRIPTION OF OPTION CODES

- KL2 ABS TOP
- KL3 COMPACT LAMINATE TOP
- Must select only one of them.



90105602

GENERAL SPECIFICATIONS

- Compact laminate or ABS top is resistant to water and heat.
- Compact laminate (HPL) body resistant to water and heat.
- Aluminum frame.
- Mini refrigerator integrated into the bed side cabinet.
- Useful drawer.
- Long life rail system.
- Durable drawer handle.
- With four castors (two of them with brake) can move freely.

TECHNICAL SPECIFICATIONS


| | | |
|----------|---|---------|
| ■ Width | : | 47,3 cm |
| ■ Depth | : | 46,5 cm |
| ■ Height | : | 84,5 cm |
| ■ Weight | : | ~ 34 kg |
| ■ Volume | : | 0,22 m³ |

* RL : Laminate color options page 84.

BED SIDE CABINET COMPACT WITH REFRIGERATOR

OPTIONS

GROUP 1 / TABLE TOP OPTIONS



DESCRIPTION OF OPTION CODES

KL2 ABS TOP

KL3 COMPACT LAMINATE TOP

Must select only one of them.



90105603

GENERAL SPECIFICATIONS

- Compact laminate or ABS top is resistant to water and heat.
- Compact laminate (HPL) body resistant to water and heat.
- Aluminum frame.
- Useful drawer.
- Long life hinge and rail system.
- Strong drawer and cabined handle.
- Imported costar wheel system with two-costar brake in a diameter of 65 mm.


TECHNICAL SPECIFICATIONS

| | | |
|----------|---|---------|
| ■ Width | : | 46,7 cm |
| ■ Depth | : | 45,7 cm |
| ■ Height | : | 65,5 cm |
| ■ Weight | : | ~ 16 kg |
| ■ Volume | : | 0,17 m³ |

* RL : Laminate color options page 84.

OPTIONS

GROUP 1 / TABLE TOP OPTIONS



DESCRIPTION OF OPTION CODES

KL2 ABS TOP

KL3 COMPACT LAMINATE TOP

Must select only one of them.



90106101

OVER BED TABLE MECHANICAL

GENERAL SPECIFICATIONS

- Laminate or ABS plastic top is durable against to water and heat.
- Height of over bed table is adjusted by mechanical handle according to height of bed.
- Epoxy painted steel construction is resistant to corrosion.
- With four castors (two of them with brake) can move freely.

TECHNICAL SPECIFICATIONS





| | |
|----------------|-----------------------|
| ■ Width | : 80 cm |
| ■ Depth | : 40 cm |
| ■ Height (min) | : 79 cm |
| ■ Height (max) | : 103 cm |
| ■ Weight | : ~ 9 kg |
| ■ Volume | : 0,30 m ³ |

* RS : Melamine color options page 85.

* RL : Laminate color options page 84.

OPTIONS

GROUP 1 / TABLE TOP OPTIONS



DESCRIPTION OF OPTION CODES

- YL1 LAMINATE COATED CHIPBOARD TOP
 - YL2 ABS TOP
 - YL3 COMPACT LAMINATE TOP
 - YL4 MELAMINE COATED CHIPBOARD TOP
 - YL5 TILTED COMPACT LAMINATE UPPER TABLE
- Must select only one of them.



90106201

OVER BED TABLE WITH GAS SPRING

GENERAL SPECIFICATIONS

- Laminate or ABS plastic top is durable against to water and heat.
- High of over bed table is adjusted by gas spring according to height of bed.
- Epoxy painted steel construction is resistant to corrosion.
- With four castors (two of them with brake) can move freely.

TECHNICAL SPECIFICATIONS





| | |
|----------------|-----------------------|
| ■ Width | : 80 cm |
| ■ Depth | : 40 cm |
| ■ Height (min) | : 79 cm |
| ■ Height (max) | : 103 cm |
| ■ Weight | : ~ 10,5 kg |
| ■ Volume | : 0,30 m ³ |

* RS : Melamine color options page 85.

* RL : Laminate color options page 84.

OPTIONS

GROUP 1 / TABLE TOP OPTIONS



DESCRIPTION OF OPTION CODES

- YL1 LAMINATE COATED CHIPBOARD TOP
 - YL2 ABS TOP
 - YL3 COMPACT LAMINATE TOP
 - YL4 MELAMINE COATED CHIPBOARD TOP
 - YL5 TILTED COMPACT LAMINATE UPPER TABLE
- Must select only one of them.



90111301

ARMCHAIR FOR ACCOMPANIMENT

GENERAL SPECIFICATIONS

- It can be used as both seat and bed with special folding.
- High density sponge bed platform.
- Epoxy painted steel construction is resistant to corrosion.
- The cloth is washable if necessary.
- Cloth colors are optional. ^(RKX)

TECHNICAL SPECIFICATIONS

| | |
|------------------|-----------------------|
| ■ Width | : 81 cm |
| ■ Depth | : 99 - 206 cm |
| ■ Sitting Height | : 40 cm |
| ■ Weight | : approx 29 kg |
| ■ Volume | : 0,70 m ³ |



* RK : Cloth color options page 86.

90111302

ARMCHAIR FOR ACCOMPANIMENT

GENERAL SPECIFICATIONS

- Durable and ergonomic design.
- Backwards at the same time moving the foot platform.
- High-density foam platform.
- Special case made of artificial leather.
- Epoxy painted steel construction is resistant to corrosion.
- Optional artificial leather choice. ^(RDx)

TECHNICAL SPECIFICATIONS

| | |
|------------------|-----------------------|
| ■ Width | : 69 cm |
| ■ Depth | : 90 - 170 cm |
| ■ Sitting Height | : 44 cm |
| ■ Weight | : approx 27 kg |
| ■ Volume | : 0,69 m ³ |



* RD : Artificial leather color options page 86.

90107101

STRETCHER

FUNCTIONS



Backrest Adjustment : 0 - 45°

OPTIONS

GROUP 1 / IV STAND OPTIONS



DESCRIPTION OF OPTION CODES

- W0** WITHOUT OTHER ACCESSORIES
 - W8** IV STAND : ONE HEIGHT ADJUSTMENT SYSTEM
- Must select only one of them.

GENERAL SPECIFICATIONS

- Antibacterial and cleanable artificial leather covered, high density foam mattress.
- Backrest position is adjusted between 0-45 degrees by mechanical system.
- Ergonomic, durable and easily cleanable metal rails system with maximum safety.
- Height adjustable IV stand is able to be located on both head and foot side corners.
- There are four bumpers on corners of bed for protection.
- Epoxy painted steel construction is, resistant to corrosion.
- Upper platform is portable in case of emergency, it can be easily removed and transferred from trolley.
- Moves easily by 150 mm diameter four castors, two of them with brake to fix the position.
- Optional vinlex color choice. (RVX)

TECHNICAL SPECIFICATIONS

| | |
|----------|----------------|
| ■ Width | : 65 cm |
| ■ Length | : 203,5 cm |
| ■ Height | : 79 cm |
| ■ Weight | : approx 50 kg |
| ■ Volume | : 1,20 m³ |



* RV : Vinlex color options page 85.

90107102

STRETCHER

FUNCTIONS



Backrest Adjustment : 0 - 65°



Trendelenburg position : 0 - 12°

OPTIONS

GROUP 1 / IV STAND OPTIONS



DESCRIPTION OF OPTION CODES

- W0** WITHOUT OTHER ACCESSORIES
- W8** IV STAND : ONE HEIGHT ADJUSTMENT SYSTEM

Must select only one of them.

GENERAL SPECIFICATIONS

- Antibacterial and cleanable artificial leather covered, high density foam mattress.
- Backrest position is adjusted by gas spring between 0-65 degrees.
- Trendelenburg position is adjusted by gas spring between 0-12 degrees.
- Ergonomic, durable and easily cleanable metal rails system with maximum safety.
- Height adjustable IV stand is able to be located on both head and foot side corners.
- There are four bumpers on corners of bed for protection.
- Epoxy painted steel construction is, resistant to corrosion.
- Upper platform is portable in case of emergency, it can be easily removed and transferred from trolley.
- Oxygen tube holder.
- Moves easily by 150 mm diameter four castors, two of them with brake to fix the position.
- Optional vinlex color choice. (RVX)

TECHNICAL SPECIFICATIONS

| | |
|----------|----------------|
| ■ Width | : 71 cm |
| ■ Length | : 212 cm |
| ■ Height | : 91 cm |
| ■ Weight | : approx 58 kg |
| ■ Volume | : 1,46 m³ |



* RV : Vinlex color options page 85.

FUNCTIONS



Backrest Adjustment : 0 - 65°



Trendelenburg position : 0 - 12°



Mattress platform minimum height :
74 cm



Mattress platform maximum height :
105 cm

GENERAL SPECIFICATIONS

- Antibacterial and cleanable artificial leather covered, high density foam mattress.
- Backrest position is adjusted by gas spring between 0-65 degrees by pulling black control handle located on foot.
- Trendelenburg position is adjusted by gas spring between 0-12 degrees by pulling black control handle located on foot.
- Height of stretcher is adjusted between 74- 105 cm by hydraulic pump.
- Ergonomic, durable and easily cleanable metal rails system with maximum safety.
- There are four bumpers on corners of bed for protection against to surrounding.
- Epoxy painted steel construction is, resistant to corrosion.
- There is an oxygen tube holder.
- Moves easily by 150 mm diameter castors.
- Optional vinlex color choice. ^(RVX)

TECHNICAL SPECIFICATIONS


| | | |
|----------|---|---------------------|
| ■ Width | : | 73,5 cm |
| ■ Length | : | 209 cm |
| ■ Weight | : | approx 102 kg |
| ■ Volume | : | 1,25 m ³ |

OPTIONS

GROUP 1 / CASTOR OPTIONS



T11



T12

GROUP 2 / IV STAND OPTIONS



W0



W8

DESCRIPTION OF OPTION CODES

- T11 CASTOR TWO WITH BRAKE (150 MM)
- T12 CASTOR CENTRAL & DIRECTIONAL LOCK (150 MM)
- W0 WITHOUT OTHER ACCESSORIES
- W8 IV STAND : ONE HEIGHT ADJUSTMENT SYSTEM

Must select only one of them.



* RV : Vinlex color options page 85.

FUNCTIONS



Backrest adjustment : 0 - 62°



Trendelenburg position : 0 - 13°



Anti - trendelenburg position : 0 - 13°



Mattress platform minimum height :
69 cm



Mattress platform maximum height :
101 cm

STRETCHER EMERGENCY

GENERAL SPECIFICATIONS

- Water and heat resistant, compact laminate (HPL) bed platform with X-Ray feature
- Anti-bacterial, effaceable imitation leather coated high density sponge lying surface.
- Head side movement by the help of shock absorber mechanism.
- Hydraulic height movement, trendelenburg and reverse trendelenburg positions.
- Pedal system that can be controlled at both sides.
- Hygienic, easily cleanable lower frame hidden by ABS plastic.
- Oxygen tube holder.
- Ergonomic, durable and easily cleanable metal rails system with maximum safety.
- There are four bumpers on corners of bed for protection.
- Metal components dyed with anti-corrosion electrostatic powder paint after being treated with phosphate.
- Moves easily by 150 mm diameter castors.
- Optional vinlex color choice. ^(RVX)

TECHNICAL SPECIFICATIONS

| | | |
|----------|---|--------------------|
| ■ Width | : | 78 cm |
| ■ Length | : | 223 cm |
| ■ Volume | : | 1,3 m ³ |

OPTIONS

GROUP 1 / CASTOR OPTIONS



T11



T12



T17

GROUP 2 / IV STAND OPTIONS



W0



W8

DESCRIPTION OF OPTION CODES

- T11 CASTOR TWO WITH BRAKE (150 MM)
- T12 CASTOR CENTRAL & DIRECTIONAL LOCK (150 MM)
- T17 CASTOR CENTRAL & DIRECTIONAL LOCK (150 MM)
- W0 WITHOUT OTHER ACCESSORIES
- W8 IV STAND : ONE HEIGHT ADJUSTMENT SYSTEM

■ Must select only one of them.



* RV : Vinlex color options page 85.

FUNCTIONS



Backrest adjustment : 0 - 70°



Trendelenburg position : 0 - 12°



Upper platform is able to be transferred from one trolley to other trolley.

STRETCHER TRANSPORT

GENERAL SPECIFICATIONS

- Antibacterial and cleanable artificial leather covered, high density foam mattress.
- Owing to resistant and useful rail system, upper platform is able to be transferred from one trolley to other trolley.
- Backrest position is adjusted by gas spring between 0-65 degrees by pulling black control handle.
- Trendelenburg position is adjusted by gas spring between 0-12 degrees by pulling black control handle.
- Ergonomic, durable and easily cleanable metal rails system with maximum safety.
- There are four bumpers on corners of bed for protection against to surrounding
- There is an oxygen tube holder.
- Epoxy painted steel construction is, resistant to corrosion.
- Moves easily by 150 mm diameter castors.
- Optional vinlex color choice. (RVX)

TECHNICAL SPECIFICATIONS

| | |
|------------------------|-----------------------|
| ■ Width | : 71 cm |
| ■ Length (one trolley) | : 214 cm |
| ■ Length (two trolley) | : 405 cm |
| ■ Height | : 88 cm |
| ■ Weight | : approx 122 kg |
| ■ Volume | : 2,60 m ³ |

OPTIONS

GROUP 1 / CASTOR OPTIONS



T11



T12

GROUP 2 / IV STAND OPTIONS



W0



W8

DESCRIPTION OF OPTION CODES

- T11 CASTOR TWO WITH BRAKE (150 MM)
- T12 CASTOR CENTRAL & DIRECTIONAL LOCK (150 MM)
- W0 WITHOUT OTHER ACCESSORIES
- W8 IV STAND : ONE HEIGHT ADJUSTMENT SYSTEM

Must select only one of them.





* RV : Vinlex color options page 85.

90108101 TROLLEY DRESSING



GENERAL SPECIFICATIONS

- Easy cleanable and resistant ABS plastics top platform.
- At both sides there are one piece of quartet drug boxes produced from transparent plexiglass.
- Sliding shelf and drawer for drug preparation.
- There is serum containers made of ABS plastics.
- There is a stainless steel dustbin and dressing bowl.
- Height adjustable IV stand.
- Epoxy painted steel construction is, resistant to corrosion.
- Moves easily by 100 mm diameter four castors two of them with brake to fix the position.

TECHNICAL SPECIFICATIONS

| | |
|----------|-----------------------|
| ■ Width | : 93 cm |
| ■ Depth | : 46 cm |
| ■ Height | : 100 cm |
| ■ Weight | : approx 47 kg |
| ■ Volume | : 0,52 m ³ |

90108201 TROLLEY DRUG DISTRIBUTION



GENERAL SPECIFICATIONS

- Easy cleanable and resistant ABS plastics top platform.
- At both sides there are one piece of quartet and two each quinary drug boxes produced from transparent flexiglass.
- Sliding shelf and drawer for drug preparation.
- There is plastic dustbin one side of trolley and other side serum containers made of ABS plastic.
- Height adjustable IV stand.
- Epoxy painted steel construction is, resistant to corrosion.
- Moves easily by 100 mm diameter four castors two of them with brake to fix the position.

TECHNICAL SPECIFICATIONS

| | |
|----------|-----------------------|
| ■ Width | : 93 cm |
| ■ Depth | : 46 cm |
| ■ Height | : 100 cm |
| ■ Weight | : approx 47 kg |
| ■ Volume | : 0,52 m ³ |

GENERAL SPECIFICATIONS

- Easy cleanable, strong ABS plastic upper platform and shelf for preparing medicine.
- Useful four pieces drawers can be locked.
- Stainless steel stand defibrillator.
- Stainless steel body.
- Long lived rail system.
- Easy moveable with 125 mm diameter casters and fixed each position with two casters having brake mechanisms.

TECHNICAL SPECIFICATIONS

| | |
|----------|-----------------------|
| ■ Width | : 74,5 cm |
| ■ Depth | : 63 cm |
| ■ Height | : 105 cm |
| ■ Weight | : approx 77 kg |
| ■ Volume | : 0,61 m ³ |



90109101 DRUG CABINET

GENERAL SPECIFICATIONS

- Lockable door.
- Height adjustable four shelves.
- Epoxy painted steel construction is resistant to corrosion.
- Moves easily by 50 mm diameter four castors, two of them with brake to fix the position.

TECHNICAL SPECIFICATIONS

| | |
|----------|-----------------------|
| ■ Width | : 60 cm |
| ■ Depth | : 40 cm |
| ■ Height | : 185 cm |
| ■ Weight | : approx 43 kg |
| ■ Volume | : 0,51 m ³ |



90109102 DRUG CABINET

GENERAL SPECIFICATIONS

- Lockable doors.
- Height adjustable four shelves.
- Epoxy painted steel construction is resistant to corrosion.
- Moves easily by 50 mm diameter four castors two of them with brake to fix the position.

TECHNICAL SPECIFICATIONS

| | |
|----------|-----------------------|
| ■ Width | : 80 cm |
| ■ Depth | : 40 cm |
| ■ Height | : 185 cm |
| ■ Weight | : approx 52 kg |
| ■ Volume | : 0,67 m ³ |



90109103 DRUG CABINET

GENERAL SPECIFICATIONS

- Lockable door.
- Height adjustable four shelves.
- Epoxy painted steel construction is resistant to corrosion.
- Moves easily by 50 mm diameter four castors, two of them with brake to fix the position.

TECHNICAL SPECIFICATIONS

| | |
|----------|-----------------------|
| ■ Width | : 60 cm |
| ■ Depth | : 40 cm |
| ■ Height | : 185 cm |
| ■ Weight | : approx 45 kg |
| ■ Volume | : 0,51 m ³ |



90109104 DRUG CABINET

GENERAL SPECIFICATIONS

- Lockable door.
- Height adjustable four shelves.
- Epoxy painted steel construction is resistant to corrosion.
- Moves easily by 50 mm diameter four castors, two of them with brake to fix the position.

TECHNICAL SPECIFICATIONS

| | |
|----------|-----------------------|
| ■ Width | : 80 cm |
| ■ Depth | : 40 cm |
| ■ Height | : 185 cm |
| ■ Weight | : approx 57 kg |
| ■ Volume | : 0,67 m ³ |



90110101 NEGATOSCOPE

GENERAL SPECIFICATIONS

- Screen is made of white plexiglass.
- One film is able to be attached on the screen.
- Screen is designed for removing or attaching film easily.
- 12 Volt leds are used in the system. Owing to this system light scatters homogeneously.
- Plastic and aluminium construction.

TECHNICAL SPECIFICATIONS

| | |
|----------|-----------------------|
| ■ Width | : 41 cm |
| ■ Depth | : 1,8 cm |
| ■ Height | : 53,2 cm |
| ■ Weight | : approx 4 kg |
| ■ Volume | : 0,01 m ³ |



90110102 NEGATOSCOPE

GENERAL SPECIFICATIONS

- Screen is made of white plexiglass.
- Two films are able to be attached on the screen.
- Screen is designed for removing or attaching film easily.
- 12 Volt leds are used in the system. Owing to this system light scatters homogeneously.
- Plastics and aluminium construction.

TECHNICAL SPECIFICATIONS

| | |
|----------|------------------------|
| ■ Width | : 78 cm |
| ■ Depth | : 1,8 cm |
| ■ Height | : 53,2 cm |
| ■ Weight | : approx 7 kg |
| ■ Volume | : 0,018 m ³ |



90110103 NEGATOSCOPE

GENERAL SPECIFICATIONS

- Screen is made of white plexiglass.
- Three films are able to be attached on the screen.
- Screen is designed for removing or attaching film easily.
- 12 Volt leds are used in the system. Owing to this system light scatters homogeneously.
- Plastics and aluminium construction.

TECHNICAL SPECIFICATIONS

| | |
|----------|------------------------|
| ■ Width | : 115 cm |
| ■ Depth | : 1,8 cm |
| ■ Height | : 53,2 cm |
| ■ Weight | : approx 10 kg |
| ■ Volume | : 0,026 m ³ |



90110201 NEGATOSCOPE

GENERAL SPECIFICATIONS

- Screen is made of white plexiglass.
- One film is able to be attached on the screen.
- Screen is designed for removing or attaching film easily.
- 32 Watt round fluorescent is used in the system.
- Steel construction is epoxy painted, which is durable against corrosion.

TECHNICAL SPECIFICATIONS

| | |
|----------|-----------------------|
| ■ Width | : 40,5 cm |
| ■ Depth | : 10 cm |
| ■ Height | : 49,5 cm |
| ■ Weight | : approx 6 kg |
| ■ Volume | : 0,03 m ³ |



90110202 NEGATOSCOPE

GENERAL SPECIFICATIONS

- Screen is made of white plexiglass.
- Two films are able to be attached on the screen.
- Screen is designed for removing or attaching film easily.
- 32 Watt round fluorescent is used in the system.
- Steel construction is epoxy painted, which is durable against corrosion.

TECHNICAL SPECIFICATIONS

| | |
|----------|-----------------------|
| ■ Width | : 75 cm |
| ■ Depth | : 10 cm |
| ■ Height | : 49,5 cm |
| ■ Weight | : approx 6,5 kg |
| ■ Volume | : 0,05 m ³ |



90110203 NEGATOSCOPE

GENERAL SPECIFICATIONS

- Screen is made of white plexiglass.
- Three films are able to be attached on the screen.
- Screen is designed for removing or attaching film easily.
- 32 Watt round fluorescent is used in the system.
- Steel construction is epoxy painted, which is durable against corrosion.

TECHNICAL SPECIFICATIONS

| | |
|----------|-----------------------|
| ■ Width | : 110 cm |
| ■ Depth | : 10 cm |
| ■ Height | : 49,5 cm |
| ■ Weight | : approx 7,5 kg |
| ■ Volume | : 0,07 m ³ |



90111101 BLOOD RECEPTION CHAIR

GENERAL SPECIFICATIONS

- Antibacterial and cleanable artificial leather covered high density foam cover.
- Height and back part chair adjustable by gas spring.
- Height and angle of arm holder adjustable by mechanical system.
- Epoxy painted steel construction is resistant to corrosion.
- Moves easily by 50 mm diameter castors.
- Vinlex colors are optional.^(RVX)

TECHNICAL SPECIFICATIONS

| | |
|------------------|----------------|
| ■ Width | : 43 cm |
| ■ Depth | : 48 cm |
| ■ Sitting Height | : 60 cm |
| ■ Weight | : approx 13 kg |
| ■ Volume | : 0,23 m³ |



90111102 BLOOD RECEPTION CHAIR

GENERAL SPECIFICATIONS

- Antibacterial and cleanable artificial leather covered high density foam cover.
- Backwards at the same time moving the foot platform.
- Height and angle of arm holder adjustable by mechanical system.
- Height adjustable IV stand.
- Epoxy painted steel construction is resistant to corrosion.
- Optional artificial leather choice.^(RDx)

TECHNICAL SPECIFICATIONS

| | |
|-----------------------|----------------|
| ■ Width | : 70,5 cm |
| ■ Depth | : 96 - 170 cm |
| ■ Sitting Height | : 44 cm |
| ■ Backrest Adjustment | : 25° - 65° |
| ■ Weight | : approx 33 kg |
| ■ Volume | : 0,90 m³ |



* RV : Vinlex color options page 85.

* RD : Artificial leather color options page 86.

90111201

BLOOD DONOR CHAIR

FUNCTIONS



Backrest Adjustment : 0 - 60°



Mattress platform height : 64,5 cm



Trendelenburg position : 0 - 12°

GENERAL SPECIFICATIONS

- Antibacterial and cleanable artificial leather covered, high density foam mattress.
- Backrest position is adjusted between 0-60 degrees by gas spring.
- Height adjustable IV stand.
- Towel rack behind of backrest.
- Trendelenburg position is adjusted between 0-12 degrees by gas spring.
- Armrests height and its angle are adjusted by mechanical system easily.
- Epoxy painted steel construction is resistant corrosion.
- Moves easily by 100 mm diameter four castors two of them with brake to fix the position.
- Vinlex colors are optional.^(RVX)

TECHNICAL SPECIFICATIONS

| | |
|------------------|-----------------------|
| ■ Width | : 65 cm |
| ■ Depth | : 150-198 cm |
| ■ Sitting Height | : 64,5 cm |
| ■ Weight | : approx 60 kg |
| ■ Volume | : 1,07 m ³ |



* RV : Vinlex color options page 85.

FUNCTIONS



PATIENT RECEPTION COUCH

GENERAL SPECIFICATIONS

- Ergonomic design.
- Foot section which moves simultaneously with the back section.
- Wheel system which may be easily moved to the desired direction.
- Three step lockable arm rests.
- Easily clearable metal construction which has high bearing capacity.
- Removable floor system.
- Plastic coated foot support platform.
- Housings for hanging serum hanger and plate table which are produced from plastics.
- Metal components painted with electrostatic paint after being coated with phosphate against corrosion.

TECHNICAL SPECIFICATIONS

| | | |
|--------------------|---|--------|
| ■ Width | : | 76 cm |
| ■ Depth | : | 112 cm |
| ■ Bedding Surface | : | 162 cm |
| ■ Sitting Height | : | 51 cm |
| ■ Back rest Height | : | 81 cm |
| ■ Height | : | 123 cm |

OPTIONS

GROUP 1 / CASTOR OPTIONS



GROUP 2 / MOTOR & GAS SPRING OPTIONS



GROUP 3 / OTHER ACCESSORY OPTIONS



DESCRIPTION OF OPTION CODES

| | |
|-----|--|
| T1 | TWIN CASTOR TWO WITH BRAKE (120 MM) |
| T14 | CASTOR CENTRAL & DIRECTIONAL LOCK (125 MM) |
| M5 | MOTOR |
| A1 | GAS SPRING |
| W0 | WITHOUT OTHER ACCESSORIES |
| W1 | IV STAND : ONE HEIGHT ADJUSTMENT SYSTEM |
| L1 | TABLE |

■ Must select only one of them.

■ Do not select the others if you select without accessory.
If you select the others you can select all or 1-2-3 ... of them.



* RD : Artificial leather color options page 86.

90205106

FUNCTIONS



PATIENT HANDLING LIFT

GENERAL SPECIFICATIONS

- It may be easily used in narrow spaces due to adjustable foot system.
- Lifting functions may be easily performed due to the engine system which is controlled by remote control.
- In case of any malfunction, the height movement may be operated manually.
- Long lasting battery system and led system indicating the status of the battery
- It provides continuous use due to the back up battery and charging unit.
- Its safe bearing capacity is 220 kg.
- XS, S, M, L, XL lifting apparatus (SLING) options are available.
- There is a lifting stretcher for lifting the patient horizontally.
- There are impact wheels that are resistant against impacts.
- It may be easily moved to the desired direction due to wheels with 100 mm diameter.
- Metal components painted with electrostatic paint after being coated with phosphate against corrosion .

OPTIONS

GROUP 1 / SLING OPTIONS




GROUP 2 / WALKING JACKET OPTIONS



GROUP 3 / STRETCHER OPTIONS




GROUP 4 / HANDLING APPARATUS OPTIONS

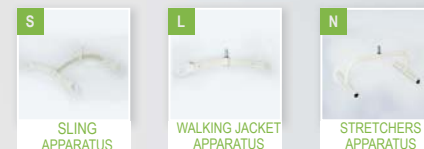

Do not select the others if you select without accessory.
If you select the others you can select all or 1-2-3 ... of them.

Must select minimum one. Can select 1-2-3 ... both.

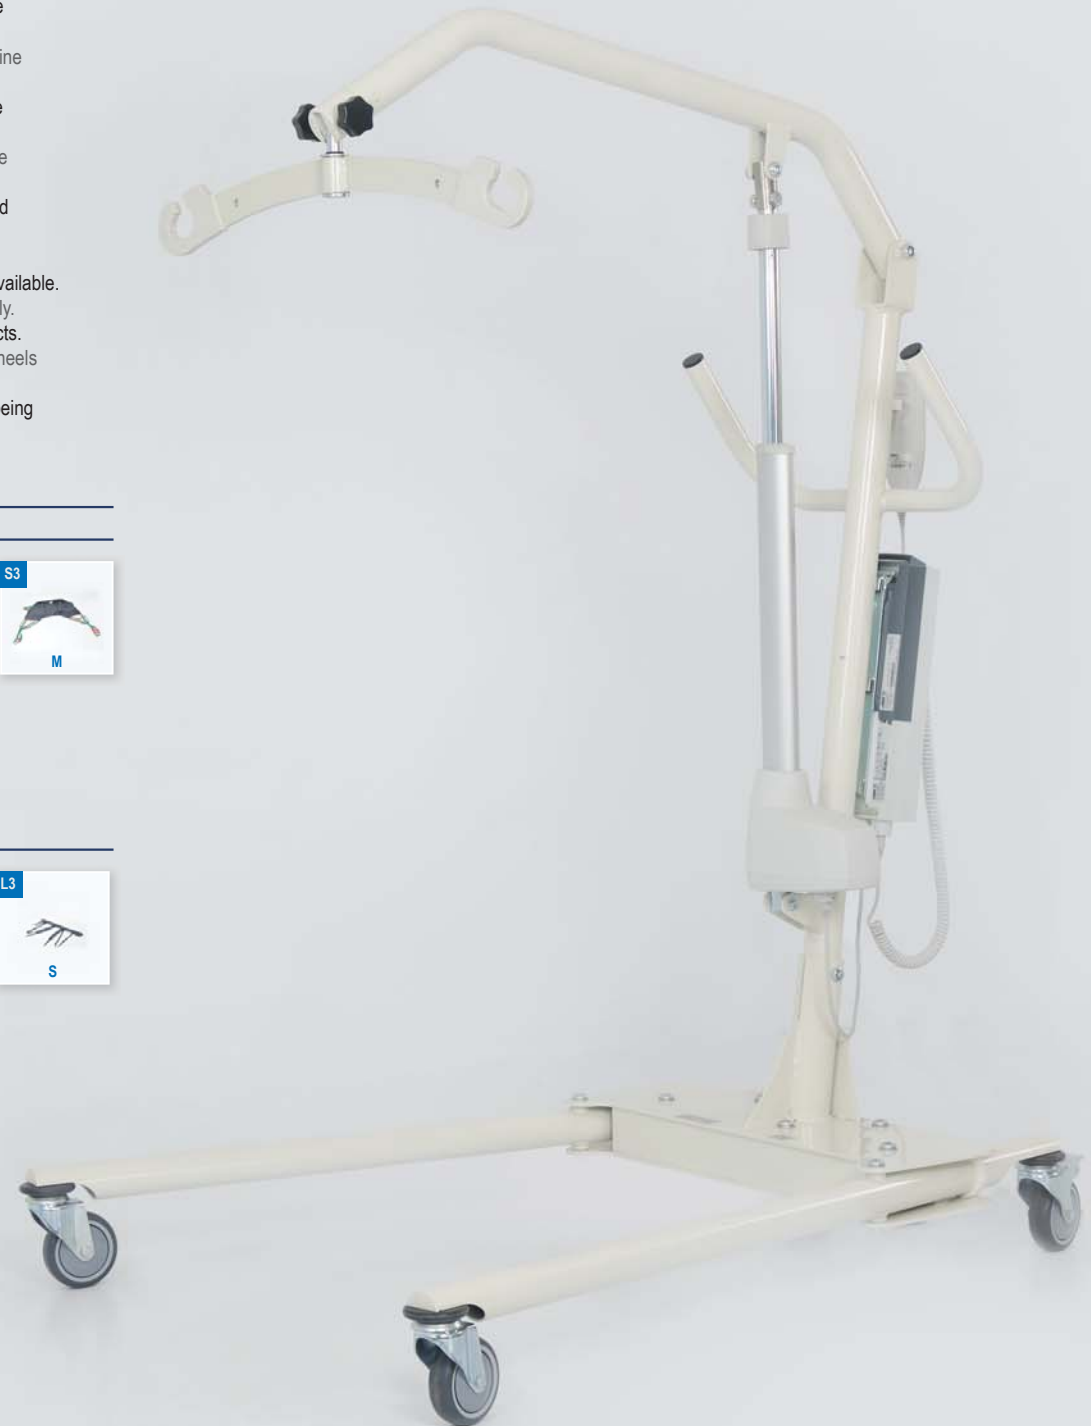

90114102 BABY EXAMINATION COUCH

GENERAL SPECIFICATIONS

- Anti-bacterial, effaceable imitation leather coated high density sponge lying surface.
- Durable and ergonomic design.
- Melamine coated chipboard body.
- Rail drawer system.
- Aluminum built-in handle system.
- Optional vinlex color choice.^(RVX)

TECHNICAL SPECIFICATIONS

| | | |
|----------|---|--------------|
| ■ Width | : | 70 cm |
| ■ Length | : | 105,5 cm |
| ■ Height | : | 90 cm |
| ■ Weight | : | approx 60 kg |
| ■ Volume | : | 0,71 m³ |



* RV : Vinlex color options page 85.

90114201

EXAMINATION COUCH FOR KIDS

GENERAL SPECIFICATIONS

- Anti-bacterial, effaceable imitation leather coated high density sponge lying surface.
- Durable and ergonomic design.
- Melamine coated chipboard body.
- Drawer system that can be used at both sides.
- Aluminum built-in handle system.
- Optional vinlex color choice.^(RVX)

TECHNICAL SPECIFICATIONS

| | | |
|----------|---|--------------|
| ■ Width | : | 56,5 cm |
| ■ Length | : | 168 cm |
| ■ Height | : | 90 cm |
| ■ Weight | : | approx 70 kg |
| ■ Volume | : | 0,92 m³ |



* RV : Vinlex color options page 85.

90114305

EXAMINATION COUCH

GENERAL SPECIFICATIONS

- Anti-bacterial, effaceable imitation leather coated high density sponge lying surface.
- Head side movement with the help of mechanical system.
- Melamine coated chipboard body supported by steel tube.
- Drawer system.
- Paper towel holder.
- Optional vinlex color choice.^(RVX)

TECHNICAL SPECIFICATIONS

| | |
|-----------------------------|-----------------------|
| ■ Width | : 65 cm |
| ■ Length | : 192,5 cm |
| ■ Height | : 73 cm |
| ■ Backrest Adjustment (max) | : 48° |
| ■ Volume | : 0,97 m ³ |



* RS : Melamine color options page 85.

* RV : Vinlex color options page 85.

90114303

EXAMINATION COUCH

GENERAL SPECIFICATIONS


- Antibacterial and cleanable artificial leather covered, high density foam mattress with its pillow.
- Backrest adjustment by mechanical system between 0-48 degrees.
- The cabinet with three drawers under legrest of examination coach designed to multi usage.
- Epoxy painted steel construction is resistant to corrosion.
- Cabinet and vinlex colors are optional.

TECHNICAL SPECIFICATIONS

| | |
|-----------------------------|-----------------------|
| ■ Width | : 59 cm |
| ■ Length | : 189 cm |
| ■ Height | : 66 cm |
| ■ Backrest Adjustment (max) | : 48° |
| ■ Weight | : approx 44 kg |
| ■ Volume | : 0,77 m ³ |

OPTIONS

GROUP 1 / CABINET OPTIONS



DESCRIPTION OF OPTION CODES

D0 WITHOUT CABINET

D3 WITH CABINET

Must select only one of them.



* RV : Vinlex color options page 85.

90114304

EXAMINATION COUCH

GENERAL SPECIFICATIONS

- Antibacterial and cleanable artificial leather covered, high density foam mattress with its pillow.
- Backrest adjustment by mechanical system between 0-48 degrees.
- Owing to foldable foot, examination couch is able to be preserved and carried with very little volumes.
- Epoxy painted steel construction is resistant to corrosion.
- Vinlex colors are optional.^(RVX)

TECHNICAL SPECIFICATIONS

| | |
|-----------------------------|-----------------------|
| ■ Width | : 59 cm |
| ■ Length | : 189 cm |
| ■ Height | : 66 cm |
| ■ Backrest Adjustment (max) | : 48° |
| ■ Weight | : approx 29 kg |
| ■ Volume | : 0,28 m ³ |



* RV : Vinlex color options page 85.

90118101

STEP

GENERAL SPECIFICATIONS

- Easy cleanable laminated stair is resistant to water and heat.
- In order to protect ground against to tearing plastic cover used on the legs.
- Epoxy painted steel construction is resistant to corrosion.
- Optional laminate color choice.^(RLX)

TECHNICAL SPECIFICATIONS

| | |
|----------|-----------------------|
| ■ Width | : 44 cm |
| ■ Depth | : 47,5 cm |
| ■ Height | : 50 cm |
| ■ Weight | : approx 6 kg |
| ■ Volume | : 0,11 m ³ |



* RL : Laminate color options page 84.

90115101

SCREEN

GENERAL SPECIFICATIONS

- Two winged screen is adjusted by casters.
- The curtains are removable, attachable and washable.
- Epoxy painted steel construction is resistant to corrosion.
- Screen is able to be used in narrow area, owing to foldable wings system if necessary.

TECHNICAL SPECIFICATIONS

| | |
|----------|-----------------------|
| ■ Length | : 140 cm |
| ■ Height | : 166 cm |
| ■ Weight | : approx 7,4 kg |
| ■ Volume | : 0,09 m ³ |



90115102

SCREEN

GENERAL SPECIFICATIONS

- Three winged screen is adjusted by castors.
- The curtain is removable, attachable and washable.
- Epoxy painted steel construction is resistant to corrosion.
- Screen is able to be used in narrow area, owing to foldable wings system if necessary.

TECHNICAL SPECIFICATIONS

| | |
|----------|-----------------------|
| ■ Length | : 210 cm |
| ■ Height | : 166 cm |
| ■ Weight | : approx 10,8 kg |
| ■ Volume | : 0,12 m ³ |



90115103

SCREEN

GENERAL SPECIFICATIONS

- Four winged screen is adjusted by castors.
- The curtain is removable, attachable and washable.
- Epoxy painted steel construction is resistant to corrosion.
- Screen is able to be used in narrow area, owing to foldable wings system if necessary.

TECHNICAL SPECIFICATIONS

| | |
|----------|-----------------------|
| ■ Length | : 280 cm |
| ■ Height | : 166 cm |
| ■ Weight | : approx 13,8 kg |
| ■ Volume | : 0,15 m ³ |



90113101

WHEELCHAIR

GENERAL SPECIFICATIONS

- With foldable property, wheelchair is able to be placed in narrow area.
- Moving foot place.
- Epoxy painted steel construction is resistant to corrosion.
- With an effective brake system, able to stopped easily.
- Back and front wheels have filling properties.

TECHNICAL SPECIFICATIONS

| | |
|------------------|-----------------------|
| ■ Width | : 62,5 cm |
| ■ Depth | : 107 cm |
| ■ Sitting Height | : 50 cm |
| ■ Height | : 94 cm |
| ■ Weight | : approx 22 kg |
| ■ Volume | : 0,21 m ³ |



90116101

IV STAND

GENERAL SPECIFICATIONS

- Height of IV stand is adjusted owing to mechanic system
- Long lived metallic body and three legs bottom epoxy painted steel construction
- There are two serum hooks.
- Moves easily with 50 mm diameter castor.

TECHNICAL SPECIFICATIONS

| | |
|----------------|-----------------------|
| ■ Height (min) | : 107 cm |
| ■ Height (max) | : 192 cm |
| ■ Weight | : approx 2,5 kg |
| ■ Volume | : 0,23 m ³ |



90116201

IV STAND

GENERAL SPECIFICATIONS

- Height of IV stand is adjusted owing to mechanic system.
- Long lived plastics five legs bottom.
- There are four serum hooks.
- Epoxy painted steel construction is resistant to corrosion.
- Moves easily with 50 mm diameter castor.

TECHNICAL SPECIFICATIONS

| | |
|----------------|-----------------------|
| ■ Height (min) | : 110 cm |
| ■ Height (max) | : 195 cm |
| ■ Weight | : approx 3,5 kg |
| ■ Volume | : 0,33 m ³ |



90117101

LINEN TROLLEY DIRTY

GENERAL SPECIFICATIONS

- Dirty laundry sack is removable, cleanable and washable.
- Epoxy painted steel construction is resistant to corrosion.
- Moves easily by 75 mm diameter three castors.

TECHNICAL SPECIFICATIONS

| | |
|----------|----------------|
| ■ Length | : 60 cm |
| ■ Depth | : 60 cm |
| ■ Height | : 94 cm |
| ■ Weight | : approx 10 kg |
| ■ Volume | : 0,37 m³ |



90117201

LINEN TROLLEY CLEAN & DIRTY

GENERAL SPECIFICATIONS

- Dirty laundry sack has removable, cleanable and washable.
- Three clean linen shelves.
- Epoxy painted steel construction is resistant to corrosion.
- Moves easily by 75 mm diameter four castors. Two of them with brake to fix the position.

TECHNICAL SPECIFICATIONS

| | |
|----------|----------------|
| ■ Length | : 110 cm |
| ■ Depth | : 45 cm |
| ■ Height | : 98,5 cm |
| ■ Weight | : approx 29 kg |
| ■ Volume | : 0,48 m³ |



GENERAL SPECIFICATIONS

- Made of heat and water resistant compact wood housing made.
- Three shelves for clean laundry.
- Can be collapsible, washable laundry bag.
- Made of aluminum that can be easily switched on and off dirty laundry cover system.
- There are bumper on corners to protect.
- Moves easily by 100 mm diameter four castors. Two of them with brake to fix the position.

TECHNICAL SPECIFICATIONS

| | |
|----------|-----------------------|
| ■ Length | : 95 cm |
| ■ Depth | : 66,5 cm |
| ■ Height | : 107 cm |
| ■ Weight | : approx 55 kg |
| ■ Volume | : 0,73 m ³ |



90119101 LOCKER

GENERAL SPECIFICATIONS

- Locker is for one person only.
- Easily cleanable melamine coated body over particle board.
- Practical shelf system and durable cloth hanger.
- Lock mechanism.
- Long-life handle and hinge system.
- Adjustable aluminum leg to be adjusted for slopped floors.
- Optional melamine coated chipboard color choice.^(RSX)

TECHNICAL SPECIFICATIONS

| | |
|----------|----------------|
| ■ Width | : 45 cm |
| ■ Depth | : 45 cm |
| ■ Height | : 190 cm |
| ■ Weight | : approx 41 kg |
| ■ Volume | : 0,44 m³ |



* RS : Melamine color options page 85.

90119102 LOCKER

GENERAL SPECIFICATIONS

- Locker is for one person only.
- Easily cleanable melamine coated body over particle board.
- Two practical drawers.
- Practical shelf system and durable cloth hanger.
- Lock mechanism.
- Long-life handle and hinge system.
- Adjustable aluminum leg to be adjusted for slopped floors.
- Optional melamine coated chipboard color choice.^(RSX)

TECHNICAL SPECIFICATIONS

| | |
|----------|----------------|
| ■ Width | : 45 cm |
| ■ Depth | : 45 cm |
| ■ Height | : 190 cm |
| ■ Weight | : approx 46 kg |
| ■ Volume | : 0,44 m³ |



* RS : Melamine color options page 85.

90119103

LOCKER

GENERAL SPECIFICATIONS

- Locker is for one person only.
- Easily cleanable melamine coated body over particle board.
- Water and heat resistant laminate coated door system over particle.
- Practical shelf system and durable cloth hanger.
- Lock mechanism.
- Long-life handle and hinge system.
- Adjustable aluminum leg to be adjusted for slopped floors.
- Optional laminate color choice for doors. ^(RLX)
- Optional melamine color choice for body. ^(RSX)

TECHNICAL SPECIFICATIONS

| | |
|----------|-----------------------|
| ■ Width | : 45 cm |
| ■ Depth | : 45 cm |
| ■ Height | : 190 cm |
| ■ Weight | : approx 41 kg |
| ■ Volume | : 0,44 m ³ |



* RS : Melamine color options page 85.
* RL : Laminated color options page 84.

90119104

LOCKER

GENERAL SPECIFICATIONS

- Locker is for one person only.
- Easily cleanable melamine coated body over particle board.
- Water and heat resistant laminate coated door system over particle.
- Two practical drawers.
- Practical shelf system and durable cloth hanger.
- Lock mechanism.
- Long-life handle and hinge system.
- Adjustable aluminum leg to be adjusted for slopped floors.
- Optional laminate color choice for doors. ^(RLX)
- Optional melamine color choice for body. ^(RSX)

TECHNICAL SPECIFICATIONS

| | |
|----------|-----------------------|
| ■ Width | : 45 cm |
| ■ Depth | : 45 cm |
| ■ Height | : 190 cm |
| ■ Weight | : approx 46 kg |
| ■ Volume | : 0,44 m ³ |



* RS : Melamine color options page 85.
* RL : Laminated color options page 84.

90119105

LOCKER

GENERAL SPECIFICATIONS

- Locker is for one person only.
- Easily cleanable melamine coated body over particle board.
- Aluminum frame.
- Two practical drawers.
- Practical shelf system and durable cloth hanger.
- Lock mechanism.
- Long-life handle and hinge system.
- Adjustable aluminum leg to be adjusted for slopped floors.
- Optional melamine coated chipboard color choice.^(RSX)

TECHNICAL SPECIFICATIONS

| | |
|----------|-----------------------|
| ■ Width | : 50 cm |
| ■ Depth | : 50 cm |
| ■ Height | : 190 cm |
| ■ Weight | : approx 50 kg |
| ■ Volume | : 0,53 m ³ |



* RS : Melamine color options page 85.

90119106

LOCKER

GENERAL SPECIFICATIONS

- Easily cleanable melamine coated body over particle board.
- Practical shelf system and durable cloth hanger.
- Lock mechanism.
- Long-life handle and hinge system.
- Adjustable aluminum leg to be adjusted for slopped floors.
- Optional melamine coated chipboard color choice.^(RSX)

TECHNICAL SPECIFICATIONS

| | |
|----------|-----------------------|
| ■ Width | : 90 cm |
| ■ Depth | : 45 cm |
| ■ Height | : 190 cm |
| ■ Weight | : approx 73 kg |
| ■ Volume | : 0,85 m ³ |



* RS : Melamine color options page 85.

90119107

LOCKER

DOLSAN

GENERAL SPECIFICATIONS

- Easily cleanable melamine coated body over particle board.
- Practical shelf system and durable cloth hanger.
- Water and heat resistant laminate coated door system over particle.
- Lock mechanism.
- Long-life handle and hinge system.
- Adjustable aluminum leg to be adjusted for slopped floors.
- Optional laminate color choice for doors. ^(RLX)
- Optional melamine color choice for body. ^(RSX)

TECHNICAL SPECIFICATIONS

| | |
|----------|-----------------------|
| ■ Width | : 90 cm |
| ■ Depth | : 45 cm |
| ■ Height | : 190 cm |
| ■ Weight | : approx 73 kg |
| ■ Volume | : 0,85 m ³ |



* RS : Melamine color options page 85.

* RL : Laminate color options page 84.

90119108

LOCKER

GENERAL SPECIFICATIONS

- Easily cleanable melamine coated body over particle board.
- Practical shelf system and durable cloth hanger.
- Lock mechanism.
- Long-life handle and hinge system.
- Adjustable aluminum leg to be adjusted for slopped floors.
- Optional melamine coated chipboard color choice.^(RSX)

TECHNICAL SPECIFICATIONS

| | |
|----------|-----------------------|
| ■ Width | : 90 cm |
| ■ Depth | : 45 cm |
| ■ Height | : 190 cm |
| ■ Weight | : approx 70 kg |
| ■ Volume | : 0,85 m ³ |



* RS : Melamine color options page 85.

GENERAL SPECIFICATIONS

- Easily cleanable melamine coated body over particle board.
- Practical shelf system and durable cloth hanger.
- Water and heat resistant laminate coated door system over particle.
- Lock mechanism.
- Long-life handle and hinge system.
- Adjustable aluminum leg to be adjusted for slopped floors.
- Optional laminate color choice for doors. ^(RLX)
- Optional melamine color choice for body. ^(RSX)

TECHNICAL SPECIFICATIONS

| | |
|----------|-----------------------|
| ■ Width | : 90 cm |
| ■ Depth | : 45 cm |
| ■ Height | : 190 cm |
| ■ Weight | : approx 73 kg |
| ■ Volume | : 0,85 m ³ |



* RS : Melamine color options page 85.

* RL : Laminate color options page 84.

FUNCTIONS



Back Rest Movement Up: +65°



Back Rest Movement Down: -30°



Trendelenburg : +32°



Reverse Trendelenburg : -24°



Lateral Tilt Movement: +20°



Lateral Tilt Movement : -20°



Leg Rest Up / Down : +20° / -75°
Head Rest Movement : +30° / -40°



Sliding Movement : 12 cm




Sliding Movement : 12 cm



Minimum Height : 72 cm




Maximum Height : 115 cm



Flex / Reflex Position : +210° / -115°

OPTIONS

GROUP 1 / ACCESSORY OPTIONS



DESCRIPTION OF OPTION CODES

A0 WITHOUT ACCESSORIES

A2 ARM SUPPORT

A3 LATERAL SUPPORT (PAIR)

A4 GOEPEL KNEE CRUTCH (PAIR)

A5 ANAESTHESIA SCREEN

A6 BODY STRAP

Do not select the others if you select without accessory.
If you select the others you can select all or 1-2-3 ... of them.

GENERAL SPECIFICATIONS

■ ELECTRO-HYDRAULIC MOVEMENTS

- Height
- Back Rest
- Trendelenburg
- Reverse Trendelenburg
- Lateral Tilt
- Sliding

■ MECHANICAL MOVEMENTS

- Head Rest
- Leg Rests, Up / Down
- Central Locking

■ REMOTE CONTROL

- Rapid recall in case of need by storing five different surgery positions
- Position reset by a single button
- Easy use in endosurgery operations thanks to the illuminated screen

■ T-BASE SPECIFICATIONS

- T-Base enables table optimal approach for the surgical team and equipment
- Silent and nonvibrating operation

■ FUNCTIONAL DESIGN & WIDE RANGE OF ACCESSORY OPTIONS

- Modular design taking shape by different surgical operations with high stability
- Solutions ensuring to reach the position required by any kind of surgical operations
- With its wide range of accessory options
- Telescopic body specifications enabling height adjustment at different levels

■ EASY ACCESS POSITIONING ARMS

- Trendelenburg/reverse trendelenburg and spine positioning arms that are easily accessible by the surgery team

TECHNICAL SPECIFICATIONS

| | | |
|--|---|--------|
| ■ Length | : | 206 cm |
| ■ Width | : | 60 cm |
| ■ Safe Operating Load (Inc. Mattress and Accessories) | : | 180 kg |



GENERAL SPECIFICATIONS

- Multi-reflector operating light is an ideal lighting device for various operations in hospital.
- Full-enclosed structure and streamlined of the lamp head, sufficiently meets the high sterilization and purification standard of operation room.
- The light beam with over 3000 specialized reflectors ensures the focus depth to 700mm.
- Color temperature approaching that of sunlight, making the tissue surface visible in natural color, can helps the doctor to distribute the operation parts clearly and accurately.
- Permanent light safety, the stand by lamp will start work within 0.2seconds automatically when the main lamp is damaged, ensuring the continuation of surgical operation. Control panel has indicator for the damage of major and standby lamps
- The dischargeable handle can be sterilized conveniently with high-temperature and high-pressure.
- Digital-control circuit offers many functions, such as stepless lighting regulation, brightness memory, low voltage star-up and power on self test etc.
- The life-span of OSRAM halogen bulb is up to 1000 hours; the bulbs can be changed easily.
- The hanging system and flexible arm are designed to position on the operation light in all directions, to meet various illumination requirements.
- Professional Germany ONDAL balancer can rotate unlimited and make light body's stable and reliable.
- High-emission reflection device may ensure that illumination degree of operating light is permanently efficient (50000- 150000lux), excellent depth of illumination and low shadow level.

TECHNICAL SPECIFICATIONS

| Diameter Lamp Housing(mm) | 700 | 500 |
|--|---------------|---------------|
| ■ Centrallluminance (Lux) | 50000-150000 | 40000-120000 |
| ■ Color Rendering Index(Ra) | ≥92 | ≥92 |
| ■ Color Temperature(K) | 4300 | 4300 |
| ■ Power Voltage(V/HZ) | ~220/50 | ~220/50 |
| ■ Power for Bulb (W) | 150 | 100 |
| ■ Light-adjusting Mode | stepless adj. | stepless adj. |
| ■ Temperature Rise at Surgeon's Head(°C) | ≤2 | ≤2 |
| ■ Focusable Light-field Size | 160-250 | 140-200 |
| ■ Effective Bulb Service Life(hour) | 1100 | 1100 |
| ■ Installation Height(mm) | 2900 | 2900 |

OPERATING LIGHT

- **Streamline:**
In light of the principle of aerodynamics, the lamp head is designed to be full-closed, streamline and with outstanding glass panel to eliminate any death space for the air flow of purification in the operation room.
- **Imported Balnced Arm:**
An agile balanced hanging arm system is installed,six sets of joints can move together flexible and make a stable positioning a designation is made to be able to move the lamp head in all directions, which technology will satisfy any need for the height or angles of the operating lamp during surgical operation.
- **Continuous Light Adjustment:**
The lamp is controlled by microprocessor and stepless lighting regulation, successive brightness adjustment.it has the function of lightness memory 'and broad electric voltage input which will work stably at a supply between AC180V- AC250V, this system provides a great capacity of anti-interference.
- **High Depth Of Illumination Focus:**
The depth of illumination has been guaranteed above 700mm with a good shadow-less and diameter of spot is 140-250mm, which is the use of multi rotated mirror reflector to form thousands of reflection and a focusing beam of high illumination.
- **Color Temperature Compensation:**
The unique filter system which may achieve a genuine cold light,the special designation for color temperature compensation has provided a color temperature of similar with natural sunlight,and completely satisfy for the different requirements in operation.



COLOR OPTIONS

LAMINATE COLOR OPTIONS

| | | | | | |
|--|---|--|--|--|--|
|  <p>RL01 : GENTAS 3156</p> |  <p>RL02 : GENTAS 3132</p> |  <p>RL03 : GENTAS 3119</p> |  <p>RL04 : GENTAS 3104</p> |  <p>RL05 : GENTAS 3105</p> |  <p>RL06 : GENTAS 3155</p> |
|  <p>RL07 : GENTAS 3120</p> |  <p>RL08 : GENTAS 3134</p> |  <p>RL09 : GENTAS 3142</p> |  <p>RL10 : GENTAS 3146</p> |  <p>RL11 : GENTAS 3147</p> |  <p>RL12 : GENTAS 3151</p> |
|  <p>RL13 : GENTAS 5344</p> |  <p>RL14 : GENTAS 4206</p> |  <p>RL15 : GENTAS 4251</p> |  <p>RL16 : GENTAS 4212</p> |  <p>RL17 : GENTAS 4234</p> |  <p>RL18 : GENTAS 4237</p> |
|  <p>RL19 : GENTAS 4347</p> |  <p>RL20 : GENTAS 4389</p> |  <p>RLX : OTHER COLORS</p> | | | |

COLOR OPTIONS

DOLSAN

MELAMINE COLOR OPTIONS



VINLEX COLOR OPTIONS




COLOR OPTIONS

ARTIFICIAL LEATHER COLOR OPTIONS



CLOTH COLOR OPTIONS

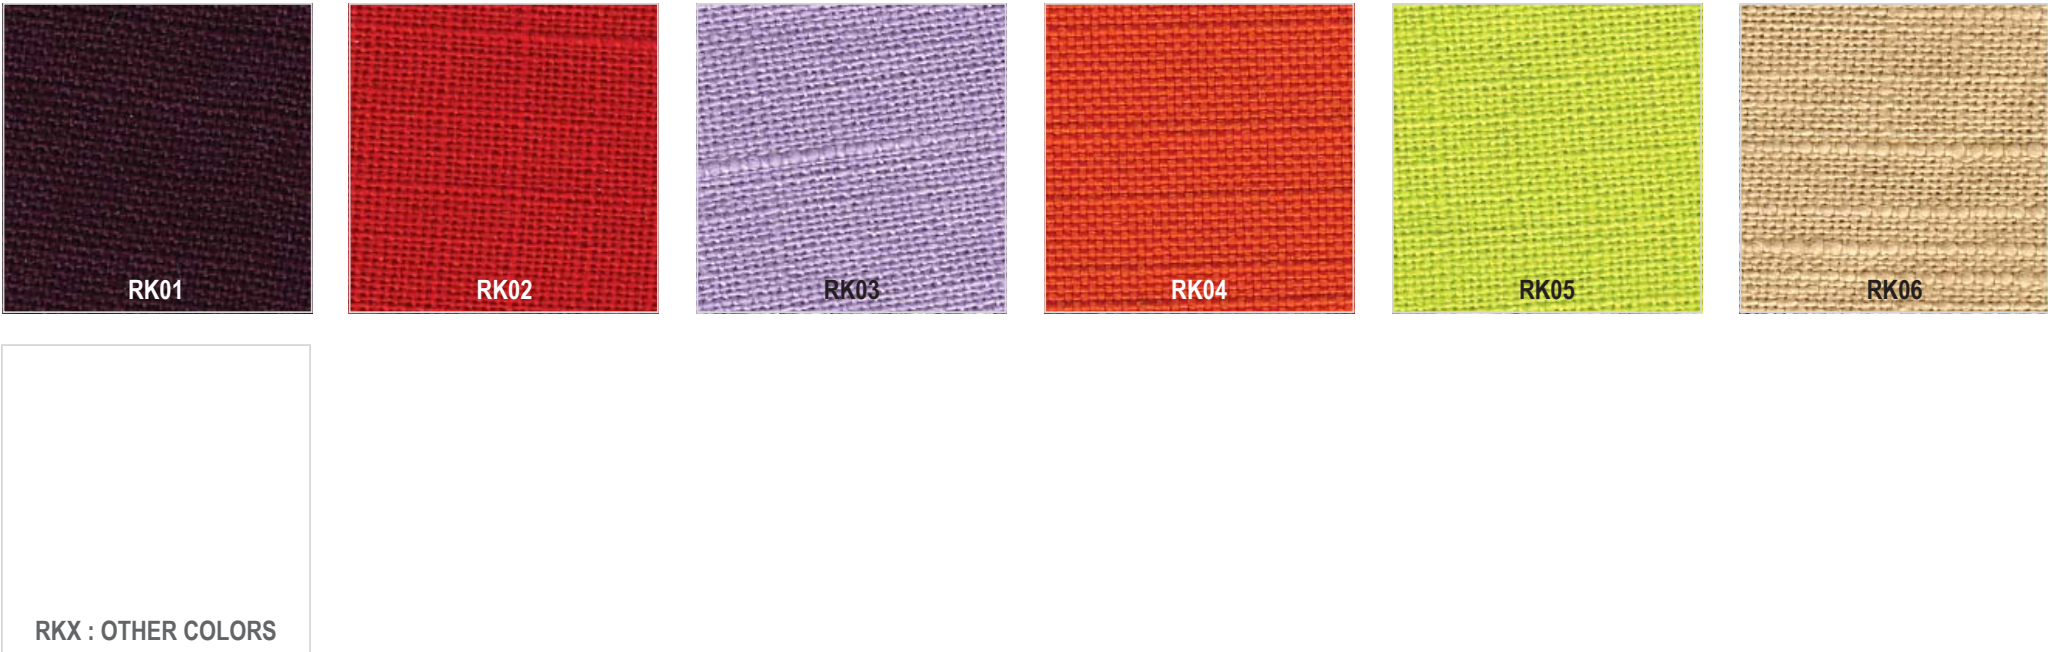

DOLSAN



Address : Bahçelievler Mah. Yavuz Cad. No:31/A
06850 Hasanoğlu Elmadağ - Ankara / TURKEY
Phone : +90 312 866 19 74 (pbx)
Fax : +90 312 866 14 51
e-mail : yonetim2@dolsan.com.tr / export1@dolsan.com.tr