

MobileDaRt Evolution MX8 type

Option List



1. Decoration Label : Sweet Animals
2. Wireless exposure switch
3. Protective screen (folding)
4. Dose area product (DAP) meter mount kit
5. Keyless entry
6. Wireless LAN
7. Luminous exposure switch
8. Additional exposure switch
9. Barcode reader (Wireless)
10. Barcode reader (Wired)
11. External monitor interface
12. IC CARD Authentication
13. Adjustable handle kit
14. LCD screen Protector
15. AC Mains Cable

*Please double check the available P/N with related Sales Information when you order.

1. Decoration Label : Sweet Animals

Description	Decoration Label	P/N	566-16939-10
Applicable models			
Remarks	 Site installation.		

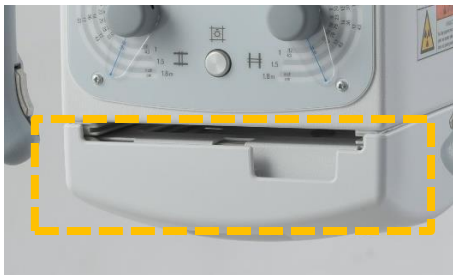
2. Wireless exposure switch

Description	Wireless hand switch(MX8)	P/N	566-20994
Applicable models			
Remarks	Wireless hand switch controls exposure and collimator lamp, which also functions as status indicator lamp for easy checking of ready up timing.   Note) Availability of this option depends on the regional radio wave regulation.		


3. Protective screen (folding)

Description	Folding radiation shield(MX8)	P/N	566-20991
Applicable models			
Remarks	0.3 mm Pb shield helps dose reduction to the users.  		

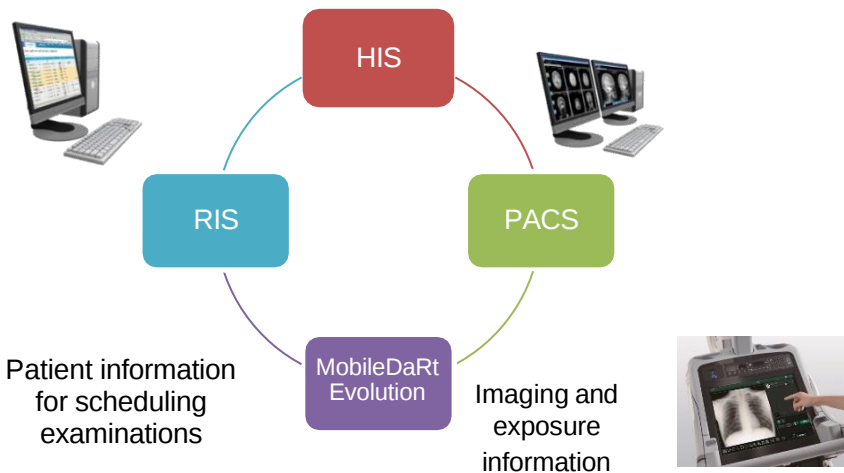
4. Dose area product (DAP) meter mount kit

Description	DAP mounting kit(MX8)	P/N	566-21151-05 (w/ SHIMADZU DAP) 566-21151-13
Applicable models			
Remarks	DAP (Dose Area Product) chamber is installed under collimator and area dose can be displayed on the console. Dose information is saved in DICOM tag. 566-21151-05 include the SHIMADZU DAP meter, which minimum display unit 0.01uGym². 566-21151-13 does not include the DAP meter itself. Please purchase DAP(VacuDAP 158-00-15) locally to display a minimum unit 0.01μGym² (in compliance with German regulations).  Note: 566-25990-01 is also needed for the consistency test in mainly Germany and Austria.		

5. Keyless entry

Description	Keyless Entry	P/N	563-71058
Applicable models	   		
Remarks	Instead of hardware key, password is available for system boot-up.   		

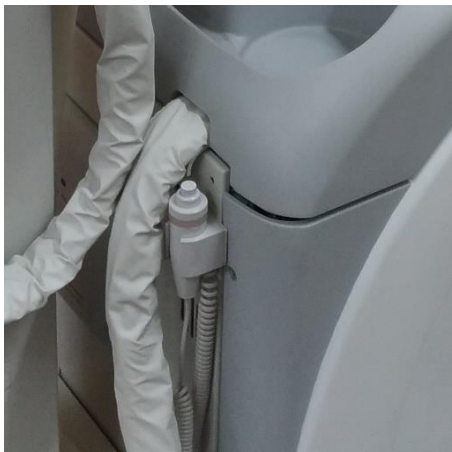
6. Wireless LAN

Description	Wireless LAN mounting kit(MX8)	P/N	563-70599-01
Applicable models	   		
Remarks	Wireless LAN becomes available by connecting Wireless LAN USB. This kit includes connection parts for wireless LAN adaptor, while wireless USB adaptor, router and LAN cable should be procured locally. 		

7. Luminous exposure switch

Description	Illumination hand switch	P/N	566-16940
Applicable models			
Remarks	Optical hand switch helps easy checking of ready up timing. 		

8. Additional exposure switch

Description	Additional front hand switch(MX8)	P/N	563-70589-01
Applicable models			
Remarks	Secondary hand switch is added at front side, consisting of optical hand switch and its adaptor. 		


9. Barcode reader (Wireless)

Description	Wireless barcode reader (MX8c, MX8k) Wireless barcode reader FUJI(MX8s)	P/N	566-21161-01 566-21161
Applicable models			
Remarks	  Note) Availability of this option depends on the regional radio wave regulation.		

10. Barcode reader (Wired)

Description	Barcode reader NE(MX8c) Barcode reader(MX8k, MX8s)	P/N	563-75293-02 563-78512-02
Applicable models			
Remarks			

11. External monitor interface

Description	External monitor interface(MX8)	P/N	566-20997
Applicable models			
Remarks	External monitor and connecting cable are not included. Clone image is shown on the other monitor, as touch panel operation is possible on the embedded display.   		

12. IC CARD Authentication

Description	IC card reader(for MX8s) IC card reader(for MX8c)	P/N	566-20996 566-20996-01
Applicable models			
Remarks	Without user name or password, the user can login to DR system by passing over card reader. (IC card reader required at the same time.) You can order Sony RC-S380/S to SHIMADZU (P/N:572-78023), if it's difficult to arrange it locally.     Note) Availability of this option depends on the regional radio wave regulation.		

13. Adjustable handle kit

Description	Adjustable Handle kit	P/N	566-20990
Applicable models	   		
Remarks	Operator can switch the standard handle height(102cm from floor) and low position(95cm) at any time according to their height.  		

14. LCD screen Protector

Description	LCD Protective Film	P/N	566-20998
Applicable models	   		
Remarks	Prevents scratches on the screen. Brightness is slightly decrease (90% transmittance) 		

15. AC Mains Cable

Description	AC Mains Cable	P/N	566-209102
Applicable models			
Remarks	AC Mains Cable can be offered with a length of 5, 10, 15 m. 		

- End -