



# TUV T8


## TUV 30W 1SL/25

TUV T8 lamps are double-ended UVC (germicidal) lamps used in professional water and air disinfection units. TUV T8 lamps offer almost constant UV output over their complete lifetime, for maximum security of disinfection and high system efficacy. Moreover, they have a long and reliable lifetime, which allows maintenance to be planned for in advance.

### Product data

General Information		Operating and Electrical	
Cap-Base	G13 [ Medium Bi-Pin Fluorescent]	Power (Nom)	30 W
Remarks	Warnings and Safety: A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner. DANGER: Risk Group 3 Ultra Violet product. These lamps emit high-power UV radiation that can cause severe injury to skin and eyes. Avoid eye and skin exposure to unshielded product. Use only in an enclosed environment which shields users from the radiation.	Lamp Current (Nom)	0.37 A
Main Application	Disinfection	Voltage (Nom)	102 V
Useful Life (Nom)	9000 h	Approval and Application	
System Description	-	Mercury (Hg) Content (Nom)	2.0 mg
Light Technical		UV	
Color Code	TUV	UV-C Radiation at 100 hr	12.0 W
Color Designation	- [ Not Specified]	Product Data	
Depreciation at Useful Lifetime	10 %	Full product code	871150072620940
		Order product name	TUV 30W 1SL/25
		EAN/UPC - Product	8711500726209
		Order code	928039504005
		Numerator - Quantity Per Pack	1
		Numerator - Packs per outer box	25
		Material Nr. (12NC)	928039504005
		Net Weight (Piece)	134.900 g



Dimensional drawing



Product	D (max)	A (max)	B (max)	B (min)	C (max)
TUV 30W 1SL/25	28 mm	894.6 mm	901.7 mm	899.3 mm	908.8 mm

TUV TL-D 30W

Photometric data

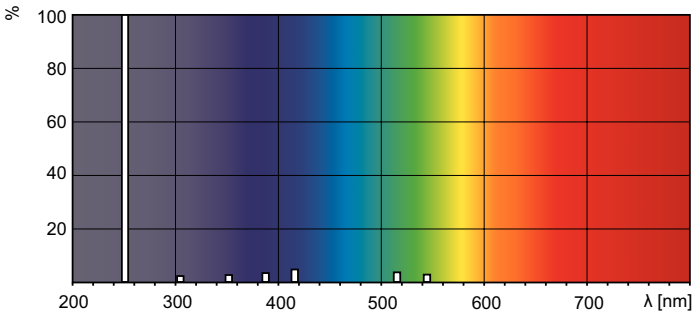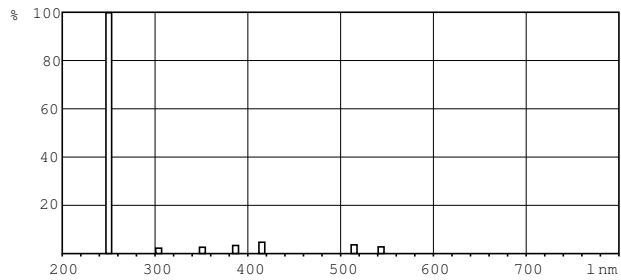

XDPB\_XUTUVTL-D-Spectral power distribution B/W

XDPO\_XUTUVTL-D-Spectral power distribution Colour

