

Nanjing Jingning Quality Inspection Company

RAPORT DE TESTARE

1. DATA TESTĂRII: 10


Februarie 2022

2. NUMĂR DE PROBE

TESTATE: 50bucăți

3. STANDARD APLICABIL: DIN 985 Piulita autobl. cu insertie
de nylon 8,8

4. INSPECTOR DE CALITATE: LI JUN

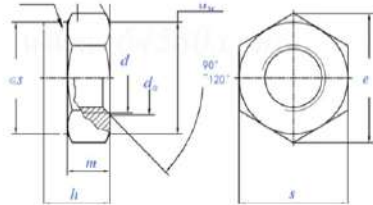

Mărime	d(mm)		c(mm)		s(mm)	
	Standard	Rezultat	Standard	Rezultat	Standard	Rezultat
M-8 (125708)	8.0-8.75mm	ACC	≥14.38mm	ACC	12.73-13.0mm	ACC
M-10 (125710)	10.0-10.8mm	ACC	≥18.9mm	ACC	16.73-17.0mm	ACC
M-12 (125712)	12.0-13.0mm	ACC	≥21.3mm	ACC	18.67-19.0mm	ACC
M-16 (125716)	16.0-17.3mm	ACC	≥26.75mm	ACC	23.67-24.0mm	ACC
M-20 (125720)	20.0-21.6mm	ACC	≥32.95mm	ACC	29.16-30.0mm	ACC
Mărime	h(mm)					
	Standard	Rezultat				
M-8 (125708)	7.64-8.0mm	ACC				
M-10 (125710)	9.64-10.0mm	ACC				
M-12 (125712)	11.57-12.0mm	ACC				
M-16 (125716)	15.3-16.0mm	ACC				
M-20 (125720)	18.7-20.0mm	ACC				
OBSERVAȚIE:						
1. Rezultatele testelor sunt în conformitate cu standardul indicat.						
2.ACC-Acceptat; REJ-Respins						

Material: 35K Heat Treatment						
Compoziție chimică și specificații tehnice						
Element	C%	Si%	Mn%	P%	S%	Ni%
Proporție	0.35	0.22	0.74	0.12	0.003	0.01

