



MICROMARTIN

vizulo



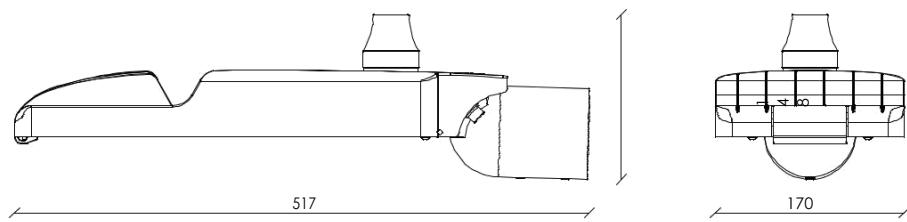

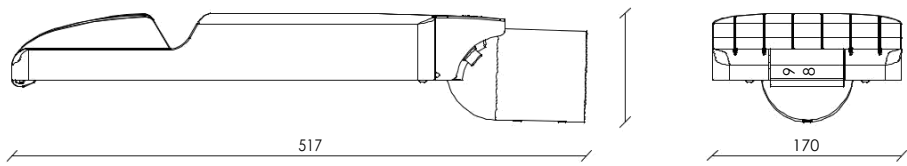

| Technical information

Model name MRUE 070 740 L22 A016 CSN WG1

V 230
Hz 50
W* 70
lm 8087
lm/W 115
K 4000
CRI 70
°C -40 to +50

Chromaticity tolerance (initial MacAdam): 5
Power factor: 0,96
Die-cast aluminum
Body color: Silver - RAL9006
Console: $\varnothing$ 40 - 60 mm
Dimensions: 517 x 170 x 98 mm
DALI, Midnight dimming, 1-10V
Radio frequency
Surge protection: 6 kV
100 000 h (L80B10) at $t_a = 25^{\circ}\text{C}$
Warranty 5 years




| Accessories



Adjustable Console $\pm 90^{\circ}$

Spigot size 60 mm
Art. 70055017



Adjustable Console $\pm 90^{\circ}$

Spigot size 76 mm
Art. 70055018

| Model name principles

		F - Flood (flood light) S - Smooth (finless) T - Tool-less E - Eco
MRU		
Power [W]	005 ... 075	
Color rendering index	≥70 - 7 ≥80 - 8	
Color temperature [K]	2700 ... 6500 Standard values: 3000 K - 30 4000 K - 40	
Lens	type 2x2 - L01 ... L99 type 8 - V01 ... V99 custom configuration - M01 ... N99	
LED module type	8 LEDs, type 2x2 lens - A 16 LEDs, type 8 lens - F	
LED quantity	001 ... 032	
Color	silver (RAL 9006) - CS asphalt (DB 703) - CA other colors available on request	
Console	post top / side-entry, ±15°, 60 mm - N post top / side-entry, ±90°, 60 mm - R post top / side-entry, ±90°, 76 mm - P flood light - F	
Dimming	non dimmable - N DALI - D 1-10V - A midnight dimming - M step dimming - S mains dimming - L wireless - W	
Surge protection	6 kV ... 10 kV integrated in driver - G seperate built-in 10 kV/10 kA SPD - H	
Insulation	class I - 1 class II - 2 class III - 3	

EXAMPLE MRUE 005 730 L99 A001 CSN NG1