

Penlon Prima 465 Anaesthetic Machine

ANAESTHESIA SOLUTIONS

- ◆ Electronic gas mixer with electronic anti-hypoxic device and digital flowmeters
- ◆ NEW 15" touchscreen user interface
- ◆ Eight ventilation modes
- ◆ Suitable for adult, paediatric and neonates
- ◆ Multiple anaesthetic gas monitoring options



NOW AVAILABLE WITH
15-inch Touchscreen

Penlon Prima 465 Anaesthetic Machine



All the features and options you need to configure a system to your exact requirements

- 1 15/12.1" TFT touchscreen display with intuitive user interface, electronic gas mixer and digital flowmeters
- 2 Eight ventilation modes
- 3 Versatile top shelf with secure GCX™ mounting system for patient monitors
- 4 Electrical outlet options
- 5 Selectatec® compatible backbar (two station)
- 6 Up to three cylinders
- 7 Illuminated work space with pull-out writing surface
- 8 GCX™ compatible aluminium uprights for additional accessory mounting
- 9 Large capacity drawer units
- 10 Integrated CO₂ absorber and bellows unit with ventilator interface
- 11 Backlit Auxiliary Common Gas Outlet (ACGO)
- 12 Oxygen therapy flowmeter

The Penlon Prima 465 is the latest high-end anaesthetic machine from Penlon, providing the ideal solution for today's busy operating room

Clinician-focused choices and benefits, including intuitive 15" TFT touchscreen with electronic gas mixer, digital flowmeters and optional anaesthetic gas monitoring



Flow Control and Visualisation

15" or 12.1" touchscreen display provides electronic gas mixer with selectable gas combinations, adjustable O₂ concentration and control of fresh gas flow rate.



Enhanced Patient Safety

Accurate electronic anti-hypoxic device and a backup O₂ gas delivery system.



Waveforms and Respiratory Loops

Choice of up to 10 waveform and respiratory loop displays.



Dual Flow Sensors

Inspiratory and expiratory volume measured and displayed on the screen.



Patient Profiles

Suitable for adult, paediatric and neonatal patient profiles.



Monitoring

Anaesthetic gas monitoring option with EtO₂ automatic anaesthetic agent identification, agent consumption, and Masimo® SpO₂.



Alarms

Audible and visual alarms with colour coding to highlight importance.



Electrical Power

Wide choice of territory-specific electrical power outlets, and a forward facing socket.



Battery BackUp

Provides power to the machine for up to 2 hours, in the event of an AC mains power failure.



Gas Supply Options

Up to three cylinder yokes and three central pipeline connections for O₂, N₂O and Medical Air.



Auxiliary Common Gas Outlet (ACGO)

Illuminated switch and front outlet provide visual indication of open breathing circuit.



Active AGSS

Disposes of waste gas and prevents possible health hazards to operating room staff.



Maintenance and After-Sales Support

Comprehensive warranty provides peace of mind and after-sales support. Additional services and warranties can be purchased to meet your particular needs.



Standards Compliant

Fully compliant to ISO 80601-2-13 and the Restrictions of Hazardous Substances (RoHS) Directive.

1 Ventilation Modes

Eight ventilation modes are available (VCV, PCV, PRVC, SPONT/PSV, SIMV-V, SIMV-P, SIMV-PRVC, and Manual) with PEEP available in all modes except Manual.

2 CO₂ Absorber

A high performance absorber with a ventilator interface as standard that provides ventilator mode switching, triggered by the bag/ventilator control. The unit has a built-in heating system and the main components are autoclavable.

3 Anaesthesia Vaporizers

The award winning Sigma Delta and the new Sigma EVA desflurane vaporizers offer multiple agent and filler system options to suit all clinical requirements.

4 Penlon Patient Monitors

Simple intuitive user interface enables clinical staff to concentrate on improved patient outcomes with accurate physiological data, and to respond immediately to any change in condition.




Ventilation Modes

Eight ventilation modes are available as standard (VCV, PCV, PRVC, SPONT/PSV, SIMV-V, SIMV-P, SIMV-PRVC, and Manual) with PEEP available in all ventilation modes.




Fresh Gas Control

Fresh gas flow can be selected using the preset defaults or set manually by using the multifunction control knob. Gas mixture can be adjusted using touchscreen display.

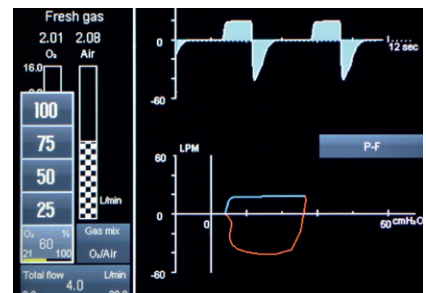


Waveform Display

Two user-selectable waveform displays with a choice of Airway Pressure, Flow Rate, Tidal Volume, P-V Loop, V-F Loop, P-F Loop, Anaesthetic Agent, CO₂, N₂O, or Pleth.

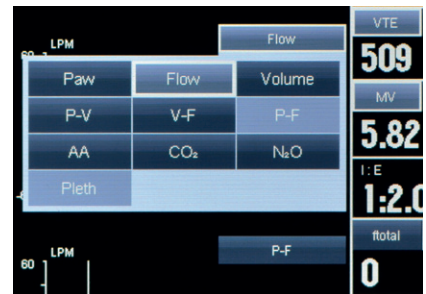

Anaesthetic Gas Monitoring


Single or twin anaesthetic agent gas bench options with MAC, Anaesthetic Agent (Fi and Et), N₂O (Fi and Et), O₂ (Fi and Et) display fields, automatic anaesthetic agent identification option and agent consumption.

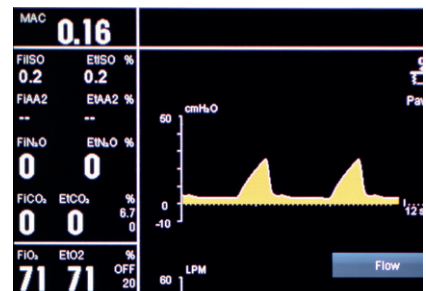

The Penlon Prima 465 anaesthetic machine provides advanced ventilation modes, accurate control and detailed monitoring capabilities in a single, easy-to-use workstation.

Trends Data

Trend review of parameter values within a specific time period up to 24 hours. User selectable parameter and time scale options.

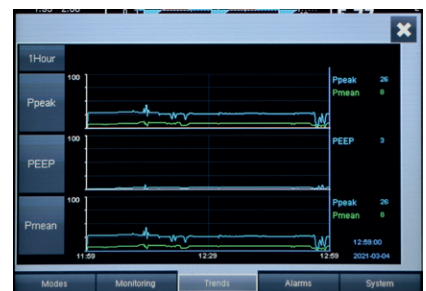

Features and Benefits




| Features | Benefits |
|--|--|
| Electronic gas mixer and digital flowmeters | Accurate gas delivery |
| Multi-mode ventilator | Suitable for multiple patient types and clinical cases |
| Integrated heater and water trap on the CO ₂ absorber | Reduces the risk of condensation |
| Absorber CO ₂ bypass | Can change absorbent while ventilating a patient |
| Eight ventilation modes | Comprehensive choice provides optimum patient care |
| Selectatec back bar | Can be used with any compatible vaporizer |
| Electronic anti-hypoxic device and backup O ₂ | Enhanced patient safety |
| Maintenance and after-sales support | Customer peace of mind |
| Integrated Sidestream anaesthetic gas monitoring | Ensures safe levels of anaesthetic agent delivery |
| Masimo® SpO ₂ monitoring | Reliable monitoring with high levels of accuracy |
| HL7 connectivity | Provides Hospital Information Systems (HIS) capability |
| Air or O ₂ drive gas | Ensures continuous use of ventilator |
| Territory-specific power outlets | Power external devices |
| AGS (anaesthetic gas scavenging) system | Alleviates contamination in theatre |
| Patient cable management arm | Reduces cable clutter |
| Oxygen therapy flowmeter | For recovery and added safety |
| Side mounted suction controller kit | Keeps airways clear |

About Penlon ♦

Penlon was founded in 1943 by personnel from the Department of Anaesthesia at Oxford University. One of the first products was the Macintosh Laryngoscope, then a revolutionary design, and still the most widely used today, invented by the late Sir Robert Macintosh, Professor of Anaesthetics.

Today Penlon continues to design, engineer and build high quality anaesthesia products at its UK operations headquarters. The company is proud to have over 80 years' dedicated experience, many awards for product design, and an impressive four Queen's Awards for Enterprise, one for 'Innovation' and three for 'International Trade'.

Penlon devices feature intuitive user interfaces that require minimal operator training, putting clinicians in control, enabling them to focus on what is most important – patient safety and wellbeing.

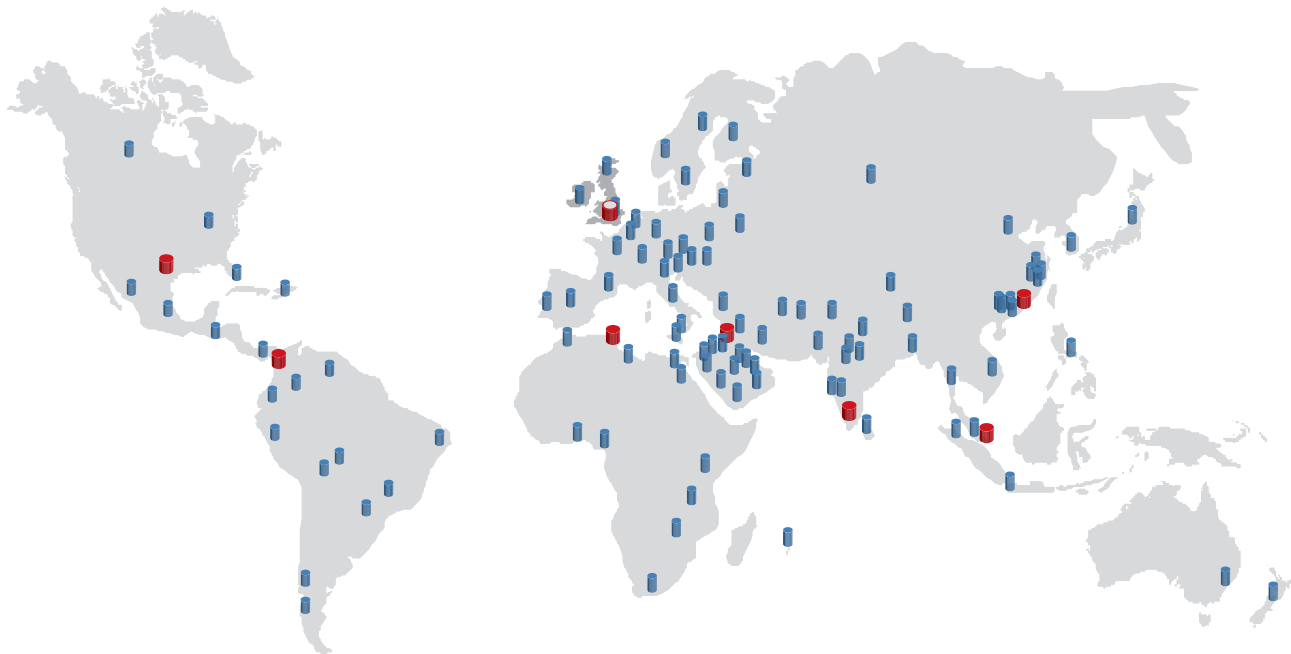

 Global Headquarters  Local Office  Distribution Partner



PenlonGlobal



company/penlon-ltd



PenlonGlobal



PenlonGlobal

Doc. No. FT1024SL / 13 May 2024. Penlon and Prima are trademarks of Penlon Limited. All other trademarks are the property of their respective owners.



A Medcaptain Company

© Penlon Ltd. 2024 All rights reserved

Penlon Limited
Abingdon Science Park
Barton Lane, Abingdon
OX14 3NB, UK

General
t +44 (0) 1235 547000
w www.penlon.com

International Sales
t +44 (0) 1235 547001
e international.sales@penlon.com

UK Sales
t +44 (0) 1235 547036
e uk.sales@penlon.com

Technical Support
t +44 (0) 1235 547060
e tech.support@penlon.com

EC REP

OBELIS S.A.
Bd Général Wahis, 53
B-1030 Brussels
Belgium