


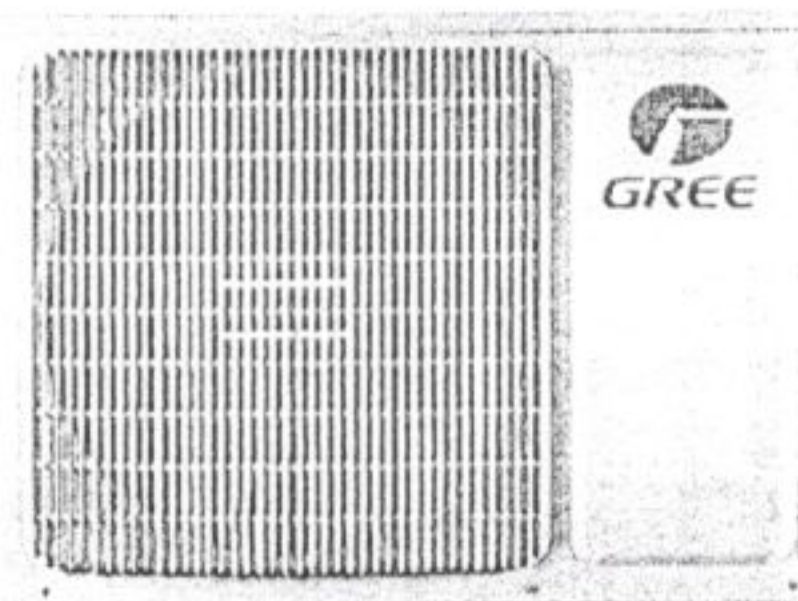

✓

Model			GWH09AAB-K6DNA4A	GWH12AAB-K6DNA4A	GWH18AAD-K6DNA4B	GWH24AAD-K6DNA4A
Funcție		U.M.	Racire / Incalzire	Racire / Incalzire	Racire / Incalzire	Racire / Incalzire
Capacitate	Racire nom(min-max)	BTU/h	8500(1700-11500)	10920(2050-12300)	16000(2200-17800)	21000(6150-22000)
	Incalzire nom(min-max)	BTU/h	9550(1700-12000)	11600(2050-15000)	17800(2400-18500)	22000(5500-22500)
SEER/SCOP		W/W	6.1 / 4	6.1 / 4	6.1 / 4	6.1 / 4
Clasa de energie	Racire / Incalzire		A++ / A+	A++ / A+	A++ / A+	A++ / A+
Alimentare		Ph-V-Hz	1/220-240/50	1/220-240/50	1/220-240/50	1/220-240/50
Putere electrica consumata	Racire nom(min-max)	W	780(160-1400)	997(100-1400)	1600(350-2100)	1760(600-2500)
	Incalzire nom(min-max)	W	780(200-1500)	940(120-1500)	1450(350-2300)	1860(650-2600)
Curent nominal	Racire	A	3.99	4.5	7	7.7
	Incalzire	A	3.74	4.4	6.3	8.1
Dezumidificare		L/h	0.8	1.4	1.8	1.8
Debit de aer	(SH/H/M/L)	(m³/h)	550/500/430/300	550/500/430/300	850/720/610/520	850/720/610/520
Suprafata de lucru		m²	20-25	30-35	45-55	60-65
Unitate interioara						
Nivel de Presiune Acustica	(SH/H/M/L)	dB(A)	40/37/35/28	42/37/35/24	48/44/39/34	48/44/40/34
Nivel de putere acustica	(SH/H/M/L)	dB(A)	55/49/47/40	55/49/47/40	58/54/49/44	59/54/50/44
Dimensiune neta	LxIxxH	mm	773x250x185	773x250x185	970x300x225	970x300x225
Dimensiune bruta	LxIxxH	mm	822x322x255	822x322x255	1020x369x295	1020x369x295
Greutate neta/ Greutate bruta		kg	8.5 / 9.5	8.5 / 9.5	13.5 / 16.5	13.5 / 16.5
Unitate exterioara						
Nivel de Presiune Acustica dB(A)		dB(A)	52	52	56	57
Nivel de putere acustica		dB(A)	60	62	64	67
Domeniu temperatura exterioara functionare	Racire (Min-Max)	°C	(-15,43)	(-15,43)	(-15,43)	(-15,43)
	Incalzire (Min-Max)	°C	(-15,24)	(-15,24)	(-15,24)	(-15,24)
Traseu frigorific	Lungime maxima	m	15	20	25	25
	Diferenta maxima de nivel	m	10	10	10	10
Dimensiune neta	LxIxxH	mm	776x540x320	842x596x320	899x596x378	955x700x396
Dimensiune bruta	LxIxxH	mm	823x595x358	881x645x363	948x645x420	1029x750x458
Distanța dintre suportii de prindere		mm	510	540	540	560
Greutate neta/ Greutate bruta		kg	29 / 31.5	31 / 34	39 / 42	46 / 50.5
Diametru traseu frigorific	Lichid	inch(mm)	1/4"(6.35)	1/4"(6.35)	1/4"(6.35)	1/4"(6.35)
	Gaz	inch(mm)	3/8"(9.52)	3/8"(9.52)	3/8"(9.52)	5/8"(15.9)
Refrigerant			R410A	R410A	R410A	R410A

Alimentarea se face la unitatea exterioara