

VCI (Vehicle Communication Interface)

The VCI (Vehicle Communication Interface) device is used to read the vehicle data and then send it to the tablet via wireless (BT) communication.

OBD II 16pin connector

(For connecting to vehicle's DLC)

**Notes:**

- It only applies to passenger vehicles with 12V battery voltage.
- Remember to remove the VCI device from the DLC if it is not in use.
- Please re-insert the VCI device into the docking slot on the back of the tablet after use to avoid loss.

**How to take out the VCI?**


Press the VCI once by hand to release it, it will be automatically ejected from the docking slot.



**Notes:**

- It illuminates RED when the VCI device is plugged into the vehicle's DLC.
- BLUE indicates that the VCI device is working in wireless (BT) communication mode.

Mode Indicator  
(See Notes)



Install the VCI connector

1. Locate vehicle's DLC socket: The DLC(Data Link Connector) is typically a 16-pin connector where diagnostic code readers interface with the vehicle's on-board computer. It is usually located on driver's side, about 12 inches away from the center of dashboard. In case no DLC is found, please refer to Automobile Repair Manual.
2. Plug the VCI connector into the vehicle's DLC(It is suggested to use the OBD II extension cable to connect the DLC and the VCI). Normally the power indicator of the VCI will light up.

1 Charging & Turning On

1. Plug one end of the included power adaptor into the USB port of the handset, and then other end into the AC outlet.
2. Once the battery is fully charged, disconnect the power adaptor from the AC outlet.
3. Press the [POWER] button on the handset, the system starts initializing and then enters the home screen.

2 Wi-Fi Setup

1. Tap [Settings] on the desktop and then [WLAN] to configure Wi-Fi setting.
2. Select the desired Wi-Fi connection from the list. (Password may be required for secured networks).
3. When "Connected" appears, it indicates that it is properly connected to the network.


3 Register and Download Software

1. Register (1. Launch App --> 2. Create an App Account --> 3. Activate VCI Connector --> 4. Finish Registration)

1. Launch app; tap on the application icon on the home screen, and then tap on "Login" on the upper right corner of the screen.
  - A. If you are a new user, refer to step 2-4.
  - B. If you have an app account, tap on "Login" to log in the system directly.
  - C. If you forgot the password, tap on "Retrieve password", and then follow on-screen prompt to retrieve it.



2. Create an App Account: Tap on "New Registration" in Figure A, input the information (items with \* must be filled) and then tap on "Register". Refer to Figure B.

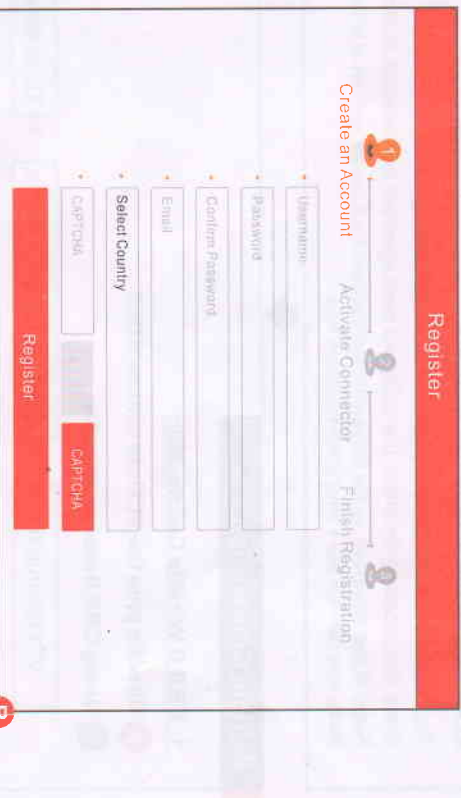

3. Activate VCI Connector: Input the Product S/N and Activation Code (can be obtained from the password envelope), and then tap on "Activate". Refer to Figure C.



### 3 Register and Download Software (Cont.)

4. Finish Registration: Tap on "Yes" to enter the vehicle software download screen. Refer to Figure D. To download it later, tap on "No".



### 2. Download the diagnostic software

Tap "Update" on the update page to start downloading. Once downloading finished, the software packages will be installed automatically.  
**Note:** When downloading the diagnostic software or checking for updates it is important to make sure the tool has a strong Wi-Fi connection.

### 4 Vehicle Connection


#### 1. OBD II Vehicle Connection

- A** Directly plug the VCI into vehicle's DLC
- B** Using OBD II extension cable




#### 2. Non-OBD II Vehicle Connection

- A** Via Cigarette Lighter Cable

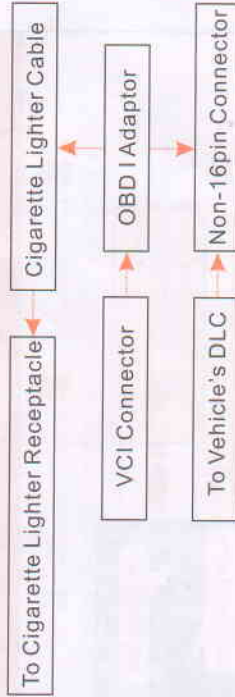


### 4 Vehicle Connection (Cont.)

#### **B** Via Battery Clamps Cable

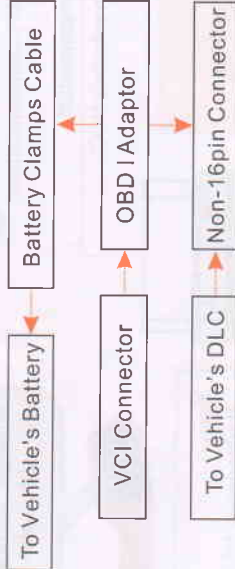

### 5 Start Diagnostics

For new users, please follow the operation chart as below to get familiar with and start using this tool.

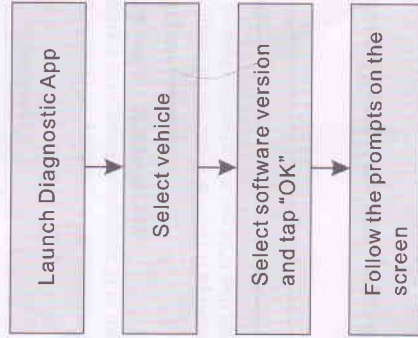

#### Preparation

Before diagnosing, please do the following:

- Switch the ignition on.
- Vehicle battery voltage range should be 9-18Volts.
- Throttle should be in a closed position.

#### Notes:

1. To enjoy more service and functions, you are suggested to check for updates on a frequent basis and keep updated with the latest available software.
2. For details on Intelligent Diagnosis, refer to User Manual.

**THANK YOU FOR CHOOSING LAUNCH!**

If you have any questions or comments please forward them to:

+86 755 8455 7891

overseas.service@cnlaunch.com